


HAND OPERATED CURTAIN TRACK SYSTEMS

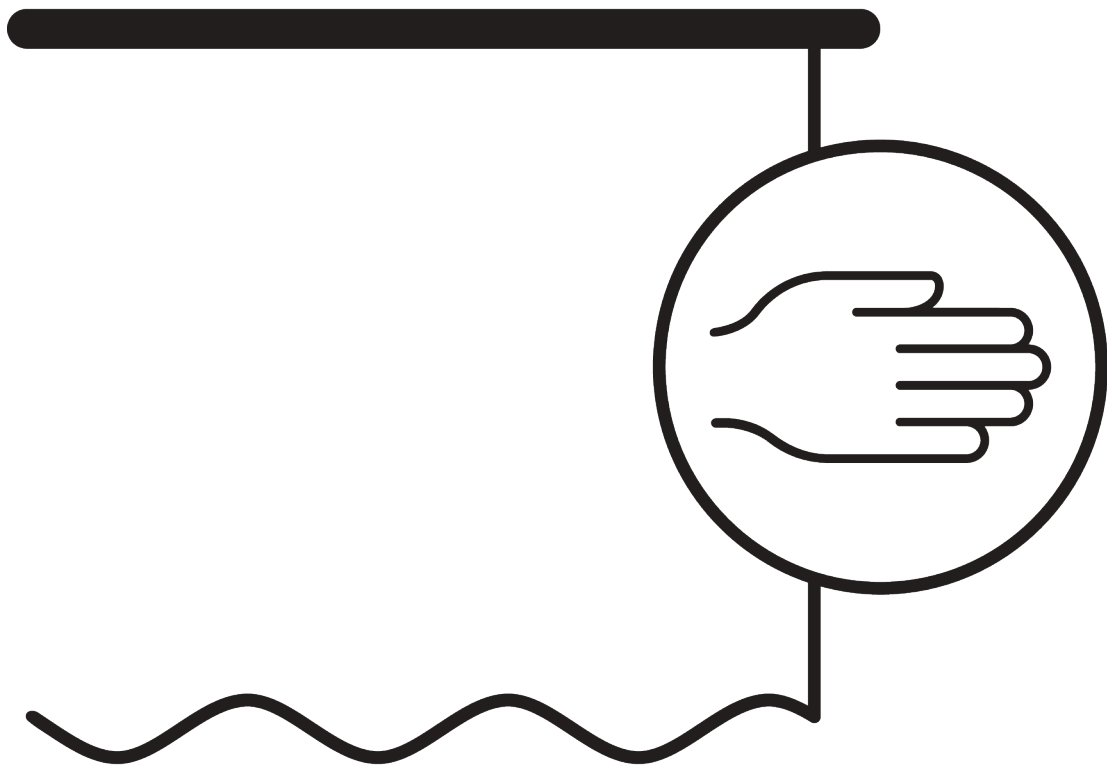

GENERAL NOTES

Dimensions

- Measurements are in mm except where indicated.
- Max. kg relates to fabric incl. accessories.
- Stack size depends on curtain make-up and fabric thickness.
- Distance between gliders max. 80 mm / distance between rollers max. 100 mm.
- Recommended distance floor / fabric: 20 mm.
- In order to determine system height (B), the smallest room height must be taken into account.

Fitting

- Installation by qualified fitter only.
- Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, fabric make-up, screw / fixing type and obstacles.
- Qualified fitter must use appropriate screws / fixings for each situation.
- Profile lip if applicable to be installed to room side.

Child Safety



- All relevant Silent Gliss systems correspond to child safety EN 13120.
- All parties involved must comply with EN 13120.

APPLICATION CHART

<u>PAGE</u>	<u>SYSTEM</u>	<u>OPERATION</u>	<u>DIMENSION</u>	<u>DESIGN</u>	<u>WAVE</u>	kg _{max.}
5	SG 1011		S			
9	SG 1012		S			
15	SG 1015		S			
21	SG 1020		S			10 kg
27	SG 1025		S			
31	SG 1060		S			
35	SG 1070		S			
39	SG 1080		S			
47	SG 1090		S			
55	SG 3600					10 kg
61	SG 6010		S - M			
69	SG 6011		S - M			
73	SG 6026		S			
77	SG 6035		M - L			
83	SG 6170		M - L			
89	SG 6243		S - M			

<u>PAGE</u>	<u>SYSTEM</u>	<u>OPERATION</u>	<u>DIMENSION</u>	<u>DESIGN</u>	<u>WAVE</u>	kg _{max.}
95	SG 6244		M - L			
99	SG 6250		S - M			
105	SG 6293		M - L			
109	SG 6380		M - L			
117	SG 6465		S - M			
125	SG 6475		S - M			
131	SG 6815		S - M			
139	SG 6820		S - M			10 kg
147	SG 6840		M - L			
157	SG 6870		M - L			
167	SG 6970		M - L			
177	SG 1032		S			

SG 1011

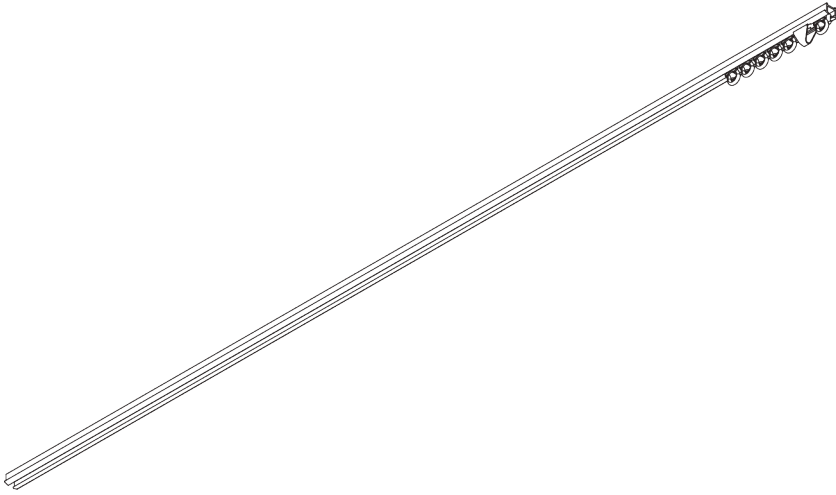

PRODUCT INFORMATION

- **Operation:** hand
- **Range:** S
- **Fitting:** recess (center SG 7550)
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- Pre-drilled profile
- Bendable

SYSTEM SPECIFICATIONS

A. PROFILE

Profile and bending information




SG 1011p

Profile

Radius:
✓ 6 cm, 10 cm

B. HOW TO MEASURE

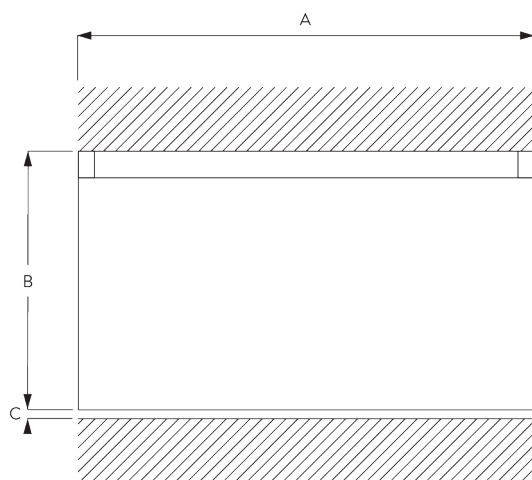

A: System width

B: System height

C: Distance between floor and fabric

C. SPECIFICATION TEXT

EN

Silent Gliss SG 1011 Hand Drawn Curtain Track System for recessed fitting. Comprises aluminium profile SG1011 supplied made to measure in silver anodised or white powder coated, alternatively a specified RAL colour. SG 3533 at 14/m and 2 end stops SG 3070/SG 3085 Spring stops per length. Top fixed directly to ceiling with screws at 120 mm centres SG3019/3025.

SV

Silent Gliss SG 1011 handdragssystem för infällning. Består av aluminiumprofil SG 1011 i specificerad längd i vitlack, alu natur eller angiven RAL färg. 14 st SG 3533 glid per meter, 2 st SG 3070 vridstopp/SG 3085 fjäder per system. Skruvas direkt i tak m skruv SG 3019/SG 3025 c/c 120 mm.

NO

Silent Gliss SG 1011 gardinskinner for innfelling. Består av aluminiumprofil SG 1011 i spesifisert lengde, standard i hvitlakkert eller alu natur. Kan også leveres i ønsket RAL farg. 14 stk SG 3533 glidere pr meter, 2 st SG 3070 vridstopp/SG 3085 fjær pr system. Skrus direkte i taket med skrue SG 3019/SG 3025 c/c 120 mm.

DA


Silent Gliss SG 1011 håndtrukket gardinskinnesystem til indfældning. Består af en aluminiumprofil SG1011 i ønsket længde, sølvanodiseret eller hvid pulverlakering, alternativt en specificeret RAL-farve. 14 stk. SG 3533 pr. m og 2 stk. SG 3070 endestop eller SG 3085 fjeder pr. længde. Fastgøres direkte i loftet med skruer SG3019/3025 med højst 120 mm afstand.

FITTING


A. FITTING INFORMATION

For detailed fitting information, visit the [Silent Gliss website](#).

Fixing points




Profile Protector

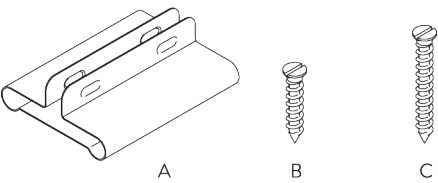

A: Profile Protector SG 7002
B: Special screw SG 3019 / 12 mm
C: Special screw SG 3025 / 18 mm

B. RECESS FITTING


Direct into wood

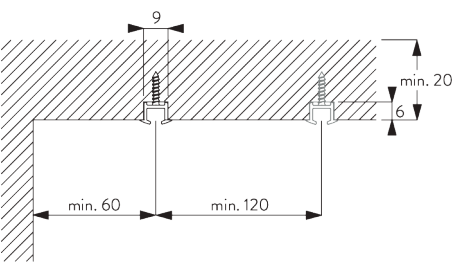




Recess channel: 6 x 9 mm









PARTS

A. STANDARD PARTS



	SG 1011p Profile
	SG 3019 Special screw 12 mm
	SG 3070 End stop
	SG 3085 Spring stop
	SG 3533 Glider
	SG 3599 Hook

B. OPTIONAL PARTS

	SG 3012 Hook
	SG 3016 End stop
	SG 3020 Hook
	SG 3025 Special screw 18 mm
	SG 3032 Spring stop
	SG 3063 Connection bridge
	SG 3071 End stop
	SG 3511 Glider
	SG 3534 Glider 3533 on strip
	SG 3535 Glider
	SG 3537 Glider
	SG 3548 Glider
	SG 3549 Click glider with hook
	SG 3570 Glider

	SG 3571 Hook
	SG 3582 Hook
	SG 3598 Eyelet
	SG 7002 Profile protector
	SG 10430 Draw rod 50 cm
	SG 10431 Draw rod 75 cm
	SG 10432 Draw rod 100 cm
	SG 10433 Draw rod 125 cm
	SG 10434 Draw rod 150 cm
	SG 11335 End stop

SG 1012

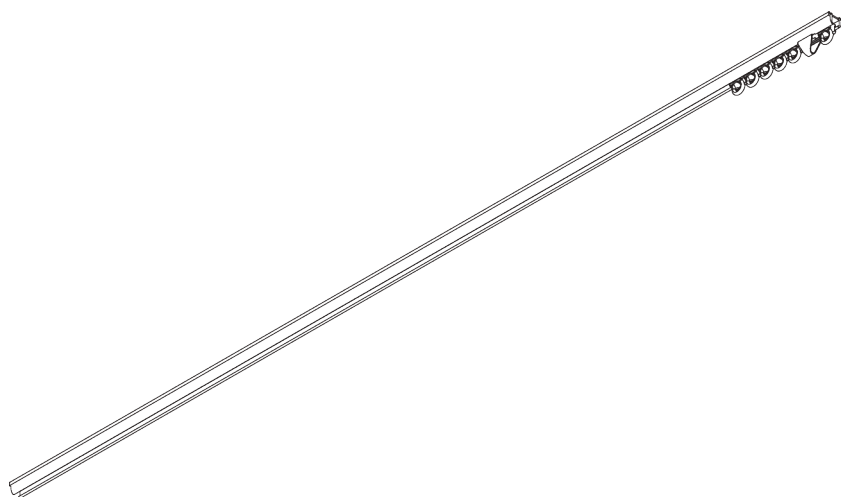

PRODUCT INFORMATION

- **Operation:** hand
- **Range:** S
- **Fitting:** recess (center SG 7550)
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- Pre-drilled profile
- Bendable

SYSTEM SPECIFICATIONS


A. PROFILE

Profile and bending information




SG 1012p

Profile



B. HOW TO MEASURE

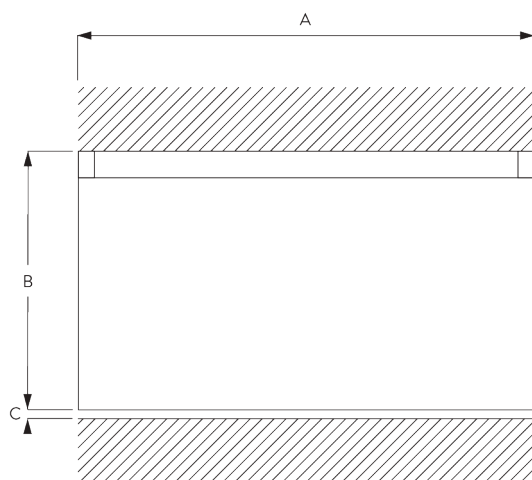

A: System width

B: System height

C: Distance between floor and fabric

C. SPECIFICATION TEXT

EN

Silent Gliss SG 1012 Hand Drawn Curtain Track System. Comprises aluminium profile SG 1012 supplied made to measure in silver anodised or white powder coated, alternatively a specified RAL colour. SG 3533 at 14/m and 2 end covers SG 3512/ end stops SG 3070/SG 3085 Spring stops per length. Top fixed with brackets SG 3112/3121 at max. 120 mm centres. Or directly to ceiling with screws SG 3019/3025.

SV

Silent Gliss SG 1012 handdragssystem. Består av aluminiumprofil SG 1012 i specificerad längd i vitlack, alu natur eller angiven RAL färg. 14 st SG 3533 glid per meter, 2 st SG 3512 ändskydd samt 2 st SG 3070 vridstopp/SG 3085 fjäder per system. Takmonteras med fäste SG 3112/3121 c/c 120 mm. Alternativt skruvas direkt i tak m skruv SG 3019/SG 3025.

NO

Silent Gliss SG 1012 manuell gardinskinne. Består av aluminiumprofil SG 1012 i spesifisert lengde, standard i hvitlakkert eller alu natur. Kan også leveres i spesifisert RAL farge. 14 stk SG 3533 glidere pr meter, 2 stk SG 3070 vriddstopp/SG 3085 fjær pr system. Takmonteres med feste SG3112/3121 c/c 120 mm. Alternativt skrus skinnen direkte i taket med skruer SG 3019/SG 3025.

DA


Silent Gliss SG 1012 håndtrukket gardinskinnesystem. Består af en aluminiumprofil SG 1012 i ønsket længde, sølvanodiseret eller hvid pulverlakering, alternativt en specificeret RAL-farve. 14 stk. SG 3533 pr. m og 2 stk. SG 3512 endelæg eller SG 3070/SG 3085 fjeder pr. længde. Loftmonteres med beslagene SG 3112/3121 med højst 120 mm afstand. Eller direkte i loftet med skruer SG3019/3025.

FITTING


A. FITTING INFORMATION

For detailed fitting information, visit the [Silent Gliss website](#).

Fixing points




Profile Protector

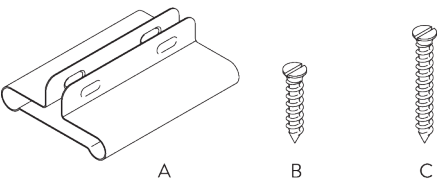



A: Profile Protector SG 7002
B: Special Screw SG 3019 / 12 mm
C: Special Screw SG 3025 / 18 mm

B. CEILING FITTING

Direct into wood


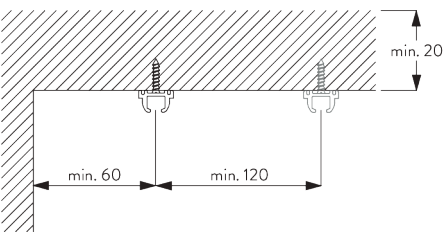


Bracket SG 3112

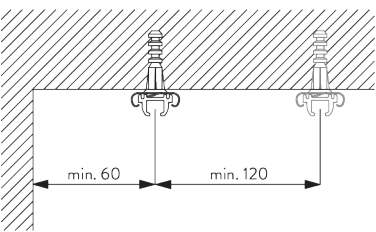

SG 3112
Bracket

Bracket SG 3121

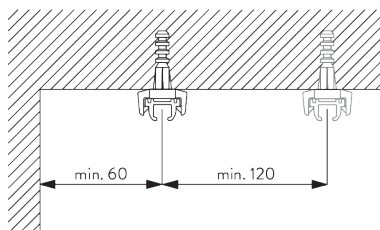


SG 3121





Bracket





PARTS

A. STANDARD PARTS



	SG 1012p Profile
	SG 3019 Special screw 12 mm
	SG 3070 End stop
	SG 3085 Spring stop
	SG 3533 Glider

B. OPTIONAL PARTS

	SG 3016 End stop
	SG 3020 Hook
	SG 3025 Special screw 18 mm
	SG 3032 Spring stop
	SG 3064 Connecting bridge
	SG 3071 End stop
	SG 3112 Bracket
	SG 3511 Glider
	SG 3512 End cover
	SG 3534 Glider 3533 on strip
	SG 3535 Glider
	SG 3537 Glider
	SG 3548 Glider
	SG 3549 Click glider with hook

	SG 3570 Glider
	SG 3571 Hook
	SG 3582 Hook
	SG 3598 Eyelet
	SG 3599 Hook
	SG 7002 Profile protector
	SG 10430 Draw rod 50 cm
	SG 10431 Draw rod 75 cm
	SG 10432 Draw rod 100 cm
	SG 10433 Draw rod 125 cm
	SG 10434 Draw rod 150 cm
	SG 11335 End stop

SG 1015

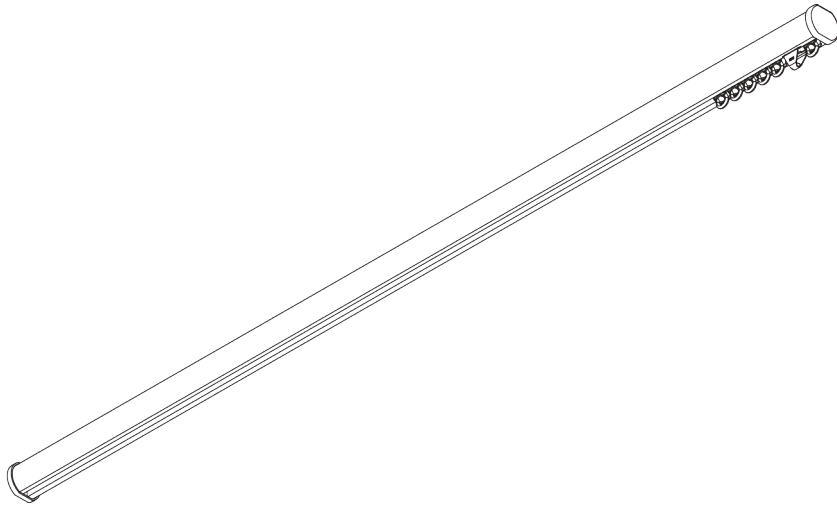

PRODUCT INFORMATION

- **Operation:** hand
- **Range:** S
- **Fitting:** ceiling, wall
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- Bendable

SYSTEM SPECIFICATIONS

A. PROFILE

Profile and bending information



SG 1003p


Profile



Radius:

15 cm, 20 cm, >25 cm

B. HOW TO MEASURE

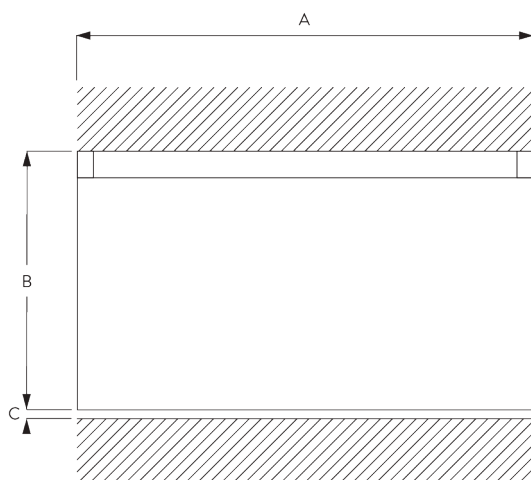

A: System width

B: System height

C: Distance between floor and fabric

C. SPECIFICATION TEXT

EN

Silent Gliss SG 1015 Hand Drawn Curtain Track System. Comprises aluminium profile SG 1003 supplied made to measure in silver anodised or white powder coated, alternatively a specified RAL colour. SG 3533 at 14/m and 2 end covers SG 3014/ end stops SG 3070 per length. Top fixed with brackets SG 6175 at max. 800 mm centres / wall fix SG Smart Fix at max. 800 mm centres.

SV

Silent Gliss SG 1015 handdragssystem. Består av aluminiumprofil SG 1003 i specificerad längd i vitlack, alu natur eller angiven RAL färg. 14 st SG 3533 glid per meter, 2 st SG 3014 ändskydd samt 2 st SG 3070 vridstopp per system. Takmonteras med fäste SG 6124 /SG 6175 c/c 800 mm. Vägghmontering med Smart Fix c/c 800 mm.

NO

Silent Gliss SG 1015 manuell gardinskinne. Består av aluminiumprofil SG 1003 i spesifisert lengde, standard hvitlakkert eller alu natur. Kan også leveres i spesifisert RAL farge. 14 stk SG 3533 glidere pr meter, 2 stk SG 3070 vristopp pr system. Takmonteres med feste SG 6175 c/c 800 mm. Veggmontering med Smart Fix c/c 800mm.


DA

Silent Gliss SG 1015 håndtrukket gardinskinnesystem. Består af en aluminiumprofil SG 1003 i ønsket længde, sølvanodiseret eller hvid pulverlakering, alternativt en specificeret RAL-farve. 14 stk. SG 3533 glidere pr. m og 2 stk. endelåg SG 3014 samt 2 stk. SG 3070 endestop pr. længde. Loftmonteres med beslagene SG 6175 med højst 800 mm afstand. Vægmonteres med SG Smart Fix med højst 800 mm afstand.


FITTING

A. FITTING INFORMATION


Fixing points

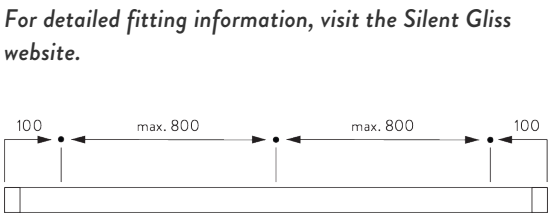


B. CEILING FITTING




Mini hanger SG 6175



Bracket SG 6124




SG 6175
Mini hanger



SG 6124
Bracket


C. WALL FITTING

Smart Fix




Smart Fix with slot SG 11206 - SG 11208:
Screw SG 10492 (M4x8) needed.


Smart Fix	X mm
SG 11206 / SG 11216	33-51
SG 11207 / SG 11217	53-71
SG 11208 / SG 11218	73-91
SG 11154	102-130
SG 11155	132-160
SG 11156	182-210



Square Smart Fix with slot SG 11216 - SG 11218:
Screw SG 10492 (M4x8) needed.

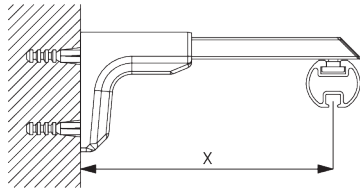

Universal Smart Fix SG 11154 - SG 11156:
Screw SG 11131 (M4x6) needed.




SG 6117
Slot nut




SG 10492
Pan head screw M4x8




SG 11131
Pan head screw with flange
M4x6




SG 11206
Smart Fix with slot 60 mm




SG 11207
Smart Fix with slot 80 mm




SG 11208
Smart Fix with slot 100 mm




SG 11216
Square Smart Fix with slot 60 mm




SG 11217
Square Smart Fix with slot 80 mm




SG 11218
Square Smart Fix with slot
100 mm



SG 11154
Universal Smart Fix 120 mm






SG 11155
Universal Smart Fix 150 mm








SG 11156
Universal Smart Fix 200 mm















PARTS


A. STANDARD PARTS

	SG 1003p Profile
	SG 3014 End cover
	SG 3070 End stop
	SG 3085 Spring stop
	SG 3533 Glider
	SG 3599 Hook
	SG 6124 Bracket

B. OPTIONAL PARTS


	SG 3012 Hook
	SG 3511 Glider
	SG 3534 Glider 3533 on strip
	SG 3535 Glider
	SG 3537 Glider
	SG 3548 Glider
	SG 3549 Click glider with hook
	SG 3570 Glider
	SG 3581 Hook
	SG 3582 Hook
	SG 3598 Eyelet
	SG 6117 Slot nut
	SG 6173 Connection bridge
	SG 6175 Mini hanger

	SG 10430 Draw rod 50 cm
	SG 10431 Draw rod 75 cm
	SG 10432 Draw rod 100 cm
	SG 10433 Draw rod 125 cm
	SG 10434 Draw rod 150 cm
	SG 10492 Pan head screw M4x8
	SG 11131 Pan head screw with flange M4x6
	SG 11154 Universal Smart Fix 120 mm
	SG 11155 Universal Smart Fix 150 mm
	SG 11156 Universal Smart Fix 200 mm
	SG 11206 Smart Fix with slot 60 mm
	SG 11207 Smart Fix with slot 80 mm
	SG 11208 Smart Fix with slot 100 mm
	SG 11216 Square Smart Fix with slot 60 mm




SG 11217

Square Smart Fix with slot 80 mm



SG 11218



Square Smart Fix with slot 100 mm



SG 11335

End stop

SG 1020

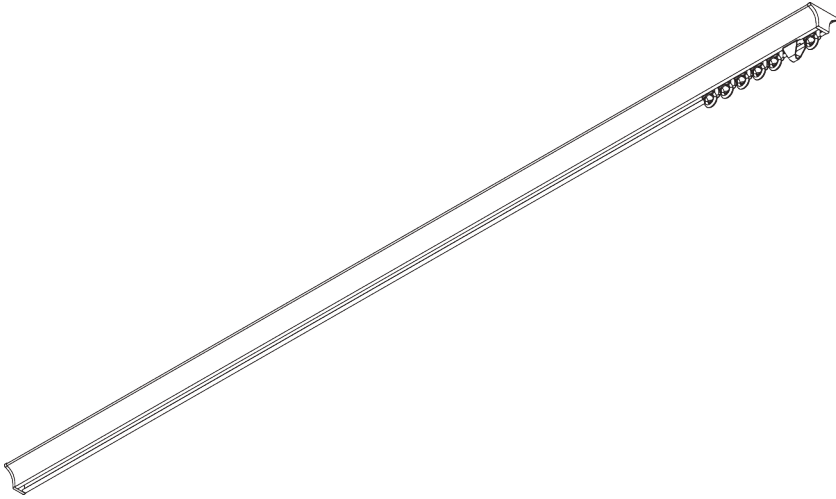

PRODUCT INFORMATION

- **Operation:** hand
- **Range:** S
- **Fitting:** ceiling
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection

Features:

- Symmetrical Funnel design
- Bendable

SYSTEM SPECIFICATIONS


A. SYSTEM DIMENSIONS



10 kg


B. PROFILE

Profile and bending information




SG 6822

Profile Funnel



Radius: >27 cm

C. HOW TO MEASURE

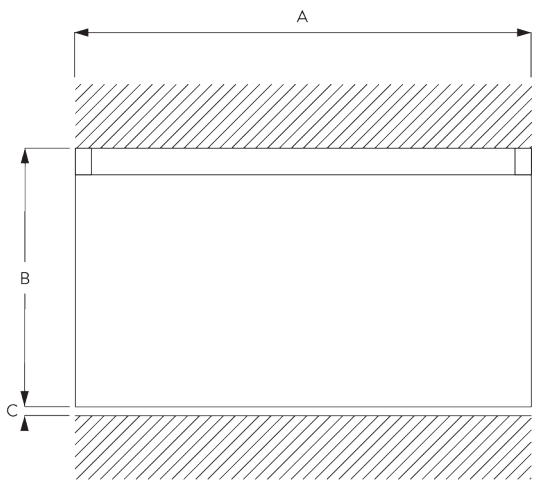

A: System width
B: System height
C: Distance between floor and fabric

D. SPECIFICATION

TEXT

EN

Silent Gliss SG 1020 Hand Drawn Curtain Track System. Comprises aluminium profile SG 6822 supplied made to measure in silver anodised or white powder coated, alternatively a specified RAL colour. SG 3533 at 14/m and 2 end covers SG 6824 / end stops SG 3070 per length. Top fixed with bracket SG 11236 at max. 500 mm centres.

SV

Silent Gliss SG 1020 handdragssystem. Består av aluminiumprofil SG 6822 i specificerad längd i vitlack, alu natur eller angiven RAL färg. 14 st SG 3533 glid per meter, 2 st SG 6824 ändskydd samt 2 st SG 3070 vridstopp per system. Takmonteras med fäste SG 11236 c/c 500 mm.

NO

Silent Gliss SG 1020 manuell gardinskinne. Består av aluminiumprofil SG 6822 i spesifisert lengde, standard i hvitlakkert eller alu natur. Kan også leveres i spesifisert RAL farge. 14 stk SG 3533 glidere pr meter, 2 stk SG 6824 endestykker samt 2 stk SG 3070 vristopp pr system. Takmonteres med feste SG 11236 c/c 500 mm.

DA


Silent Gliss SG 1020 håndtrukket gardinskinnesystem. Består af en aluminiumprofil SG 6822 i ønsket længde, sølvanodiseret eller hvid pulverlakering, alternativt en specificeret RAL-farve. 14 stk. SG 3533 glidere pr. m og 2 stk. SG 6824 endelåg samt 2 stk. SG 3070 endestop pr. længde. Loftmonteres med beslag SG 11236 med højst 500 mm afstand.

FITTING


A. FITTING INFORMATION

Fixing points

For detailed fitting information, visit the Silent Gliss website.



Fitting Tool

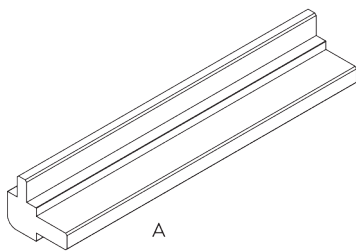



A: Funnel fitting tool SG 6827

For fitting / removing of the funnel profile.

B. CEILING FITTING

Clip SG 11236

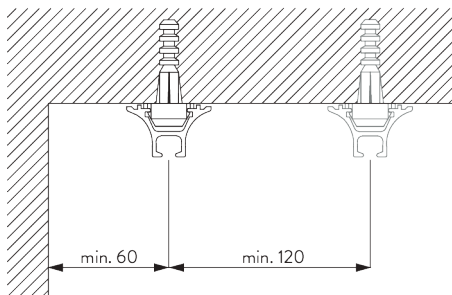





SG 11236











Clip





PARTS

A. STANDARD PARTS



	SG 3070 End stop
	SG 3085 Spring stop
	SG 3533 Glider
	SG 3599 Hook
	SG 6822 Profile Funnel
	SG 6824 End cover
	SG 11236 Clip

B. OPTIONAL PARTS

	SG 3012 Hook
	SG 3016 End stop
	SG 3062 Connection bridge
	SG 3071 End stop
	SG 3511 Glider
	SG 3534 Glider 3533 on strip
	SG 3535 Glider
	SG 3537 Glider
	SG 3548 Glider
	SG 3549 Click glider with hook
	SG 3555 Hook
	SG 3570 Glider
	SG 3582 Hook
	SG 3598 Eyelet

	SG 10430 Draw rod 50 cm
	SG 10431 Draw rod 75 cm
	SG 10432 Draw rod 100 cm
	SG 10433 Draw rod 125 cm
	SG 10434 Draw rod 150 cm
	SG 11335 End stop

SG 1025

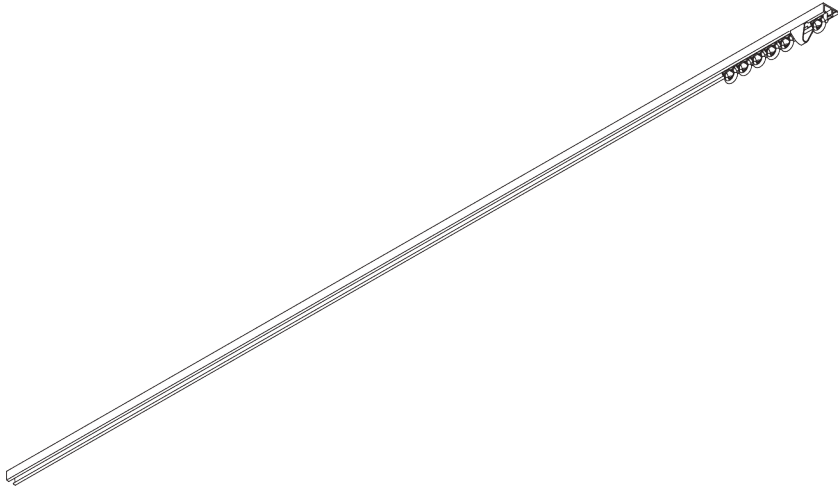

PRODUCT INFORMATION

- **Operation:** hand
- **Range:** S
- **Fitting:** ceiling
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- Pre-drilled profile
- Bendable

SYSTEM SPECIFICATIONS


A. PROFILE

Profile and bending information




SG 1025p

Profile



B. HOW TO MEASURE

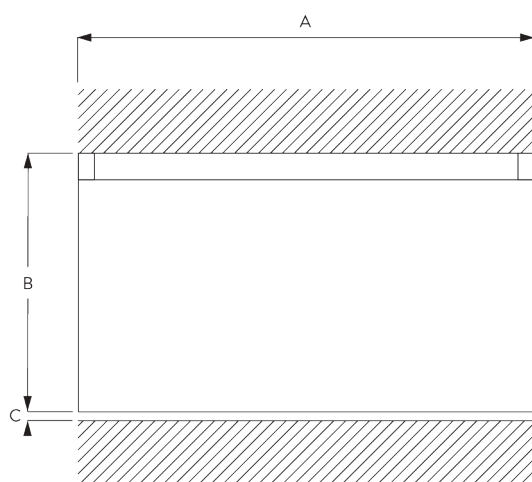

A: System width

B: System height

C: Distance between floor and fabric

C. SPECIFICATION TEXT

EN

Silent Gliss SG 1025 Hand Drawn Curtain Track System for recessed fitting. Comprises aluminium profile SG1025 supplied made to measure in silver anodised or white powder coated, alternatively a specified RAL colour. SG 3533 at 14/m and 2 end stops SG 3070/SG 3085 Spring stops per length. Top fixed directly to ceiling with screws at max. 300 mm centres.

SV

Silent Gliss SG 1025 handdragssystem. Består av aluminiumprofil SG 1025 i specificerad längd i vitlack, alu natur eller angiven RAL färg. 14 st SG 3533 glid per meter, 2 st SG 3070 vridstopp/SG 3085 fjäder per system. Skruvas direkt i tak m skruv c/c 300 mm.

NO

Silent Gliss SG 1025 manuell gardinskinne. Består av aluminiumprofil SG 1025 i spesifisert lengde, standard i hvitlakkert eller alu natur. Kan også leveres i spesifisert RAL farge. 14 stk SG 3533 glidere pr meter, 2 stk SG 3070 vristopp/SG 3085 fjær pr system. Skrus direkte i tak med skrue c/c 300 mm.

DA


Silent Gliss SG 1025 håndtrukket gardinskinnesystem til indfældning. Består af en aluminiumprofil SG1025 i ønsket længde, sølvanodiseret eller hvid pulverlakering, alternativt en specificeret RAL-farve. 14 stk. SG 3533 pr. m og 2 stk. SG 3070 endestop eller SG 3085 fjeder pr. længde. Fastgøres direkte i loftet med skruer med højst 300 mm afstand.

FITTING

A. FITTING INFORMATION


For detailed fitting information, visit the *Silent Gliss* website.

Fixing points





B. CEILING FITTING

Direct into wood

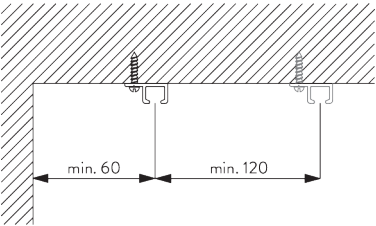








PARTS

A. STANDARD PARTS



	SG 1025p Profile
	SG 3070 End stop
	SG 3085 Spring stop
	SG 3533 Glider
	SG 10896 Pan head screw 2.9x13

B. OPTIONAL PARTS

	SG 3012 Hook
	SG 3016 End stop
	SG 3020 Hook
	SG 3032 Spring stop
	SG 3071 End stop
	SG 3072 Eyelet
	SG 3088 Endstop with hook
	SG 3511 Glider
	SG 3534 Glider 3533 on strip
	SG 3535 Glider
	SG 3537 Glider
	SG 3548 Glider
	SG 3549 Click glider with hook
	SG 3555 Hook

	SG 3570 Glider
	SG 3571 Hook
	SG 3582 Hook
	SG 3598 Eyelet
	SG 3599 Hook
	SG 10430 Draw rod 50 cm
	SG 10431 Draw rod 75 cm
	SG 10432 Draw rod 100 cm
	SG 10433 Draw rod 125 cm
	SG 10434 Draw rod 150 cm
	SG 11335 End stop

SG 1060

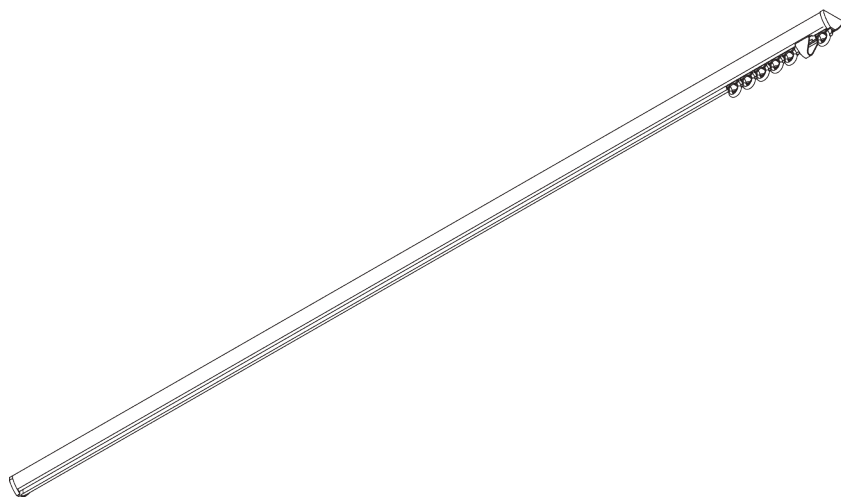

PRODUCT INFORMATION

- **Operation:** hand
- **Range:** S
- **Fitting:** ceiling
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- Bendable

SYSTEM SPECIFICATIONS

A. PROFILE

Profile and bending information




SG 1060p

Profile

Radius:
✓ 6 cm, 10 cm, 12 cm,
20 cm, >30 cm

B. HOW TO MEASURE

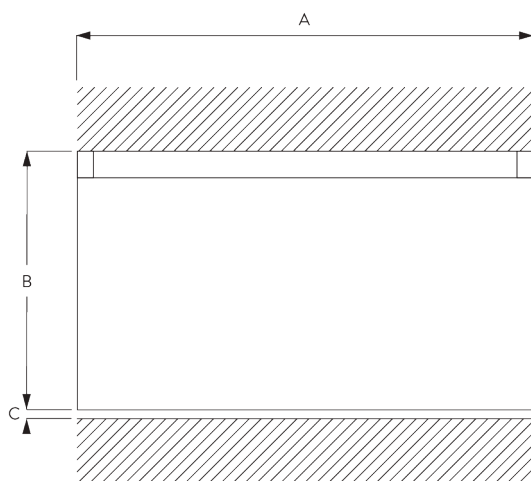

A: System width

B: System height

C: Distance between floor and fabric

C. SPECIFICATION TEXT

EN

Silent Gliss SG 1060 Hand Drawn Curtain Track System. Comprises aluminium profile SG1060 supplied made to measure in silver anodised or white powder coated, alternatively a specified RAL colour. SG 3533 at 14/m and 2 end covers SG 3061/ end stops SG 3070 per length. Top fixed with brackets SG 3060 at max. 300 mm centres.

SV

Silent Gliss SG 1060 handdragssystem. Består av aluminiumprofil SG 1060 i specificerad längd i vitlack, alu natur eller angiven RAL färg. 14 st SG 3533 glid per meter, 2 st SG 3061 ändskydd samt 2 st SG 3070 vridstopp per system. Takmonteras med fäste SG 3060 c/c 300 mm.

NO

Silent Gliss SG 1060 manuell gardinskinne. Består av aluminiumprofil SG 1060 i spesifisert lengde, standard i hvitlakkert eller alu natur. Kan også leveres i spesifisert RAL farge. 14 stk SG 3533 glidere pr meter, 2 stk SG 3061 endeløkk samt 2 stk SG 3070 vristopp pr system. Takmonteres med feste SG 3060 c/c 300 mm.

DA


Silent Gliss SG 1060 håndtrukket gardinskinnesystem. Består af en aluminiumprofil SG1060 i ønsket længde, sølvanodiseret eller hvid pulverlakering, alternativt en specificeret RAL-farve. 14 stk. SG 3533 glidere pr. m og 2 stk. endelåg SG 3061 samt 2 stk. SG 3070 endestop pr. længde. Loftmonteres med beslagene SG 3060 med højst 300 mm afstand.

FITTING

A. FITTING INFORMATION



For detailed fitting information, visit the *Silent Gliss* website.

Fixing points



B. CEILING FITTING



Clamp SG 3060

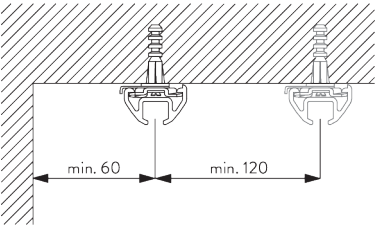



SG 3060
Clamp






PARTS

A. STANDARD PARTS



	SG 1060p Profile
	SG 3060 Clamp
	SG 3061 End cover
	SG 3070 End stop
	SG 3085 Spring stop
	SG 3533 Glider
	SG 3599 Hook

B. OPTIONAL PARTS

	SG 3012 Hook
	SG 3016 End stop
	SG 3060 Clamp
	SG 3062 Connection bridge
	SG 3511 Glider
	SG 3534 Glider 3533 on strip
	SG 3535 Glider
	SG 3537 Glider
	SG 3548 Glider
	SG 3549 Click glider with hook
	SG 3570 Glider
	SG 3582 Hook
	SG 3598 Eyelet
	SG 10430 Draw rod 50 cm

	SG 10431 Draw rod 75 cm
	SG 10432 Draw rod 100 cm
	SG 10433 Draw rod 125 cm
	SG 10434 Draw rod 150 cm
	SG 11335 End stop

SG 1070

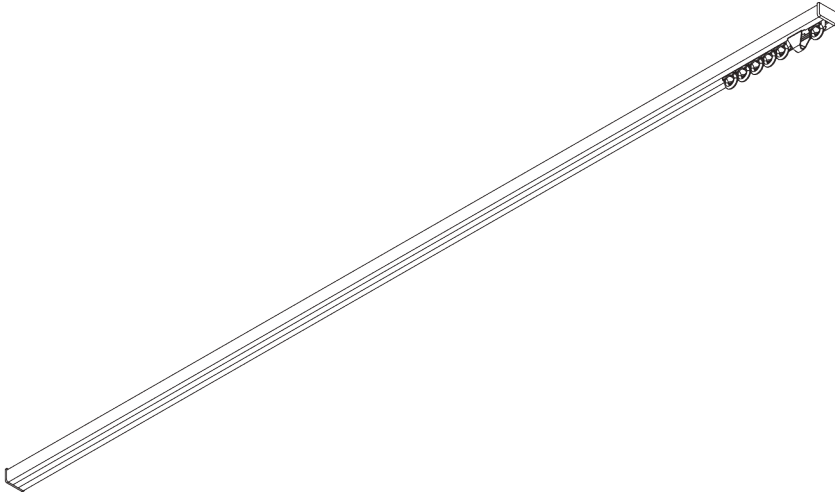

PRODUCT INFORMATION

- **Operation:** hand
- **Range:** S
- **Fitting:** ceiling
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- Bendable

SYSTEM SPECIFICATIONS

A. PROFILE

Profile and bending information




SG 1071

Profile 1071

Radius:
✓ 8 cm, 12 cm, 16 cm,
>25 cm

B. HOW TO MEASURE

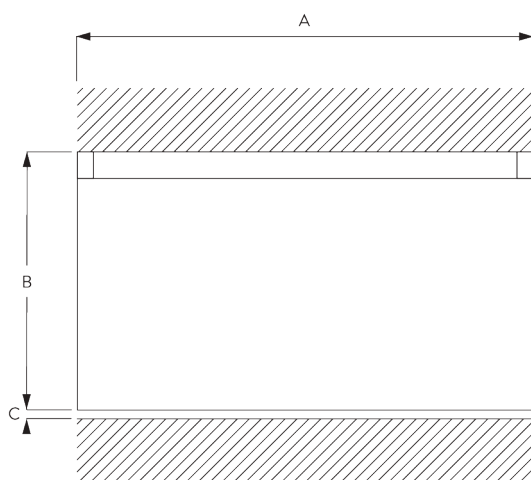

A: System width
B: System height
C: Distance between floor and fabric

C. SPECIFICATION TEXT

EN

Silent Gliss SG 1070 Hand Drawn Curtain Track System. Comprises aluminium profile SG1071 supplied made to measure in silver anodised or white powder coated, alternatively a specified RAL colour. SG 3533 at 14/m and 2 end covers SG 1072/ end stops SG 3070 per length. Top fixed with brackets SG 3060 at max. 300 mm centres.

SV

Silent Gliss SG 1070 handdragssystem. Består av aluminiumprofil SG 1071 i specificerad längd i vitlack, alu natur eller angiven RAL färg. 14 st SG 3533 glid per meter, 2 st SG 1072 ändskydd samt 2 st SG 3070 vridstopp per system. Takmonteras med fäste SG 3060 c/c 300 mm.

NO

Silent Gliss SG 1070 manuell gardinskinne. Består av aluminiumprofil SG 1071 i spesifisert lengde, standard i hvitlakkert eller alu natur. Kan også leveres i spesifisert RAL farge. 14 stk SG 3533 glidere pr meter, 2 stk SG 1072 endestykker samt 2 stk SG 3070 vristopp pr system. Takmonteres med feste SG 3060 c/c 300 mm.

DA


Silent Gliss SG 1070 håndtrukket gardinskinnesystem. Består af en aluminiumprofil SG1071 i ønsket længde, sølvanodiseret eller hvid pulverlakering, alternativt en specificeret RAL-farve. 14 stk. SG 3533 glidere pr. m og 2 stk. endelåg SG 1072 samt 2 stk. SG 3070 endestop pr. længde. Loftmonteres med beslagene SG 3060 med højst 300 mm afstand.

FITTING

A. FITTING INFORMATION



For detailed fitting information, visit the *Silent Gliss* website.

Fixing points



B. CEILING FITTING




Clamp SG 3060





SG 3060
Clamp



PARTS

A. STANDARD PARTS



	SG 1071 Profile 1071
	SG 1072 End cover
	SG 3060 Clamp
	SG 3070 End stop
	SG 3085 Spring stop
	SG 3533 Glider
	SG 3599 Hook

B. OPTIONAL PARTS

	SG 3012 Hook
	SG 3062 Connection bridge
	SG 3511 Glider
	SG 3534 Glider 3533 on strip
	SG 3535 Glider
	SG 3537 Glider
	SG 3548 Glider
	SG 3549 Click glider with hook
	SG 3570 Glider
	SG 3582 Hook
	SG 10430 Draw rod 50 cm
	SG 10431 Draw rod 75 cm
	SG 10432 Draw rod 100 cm
	SG 10433 Draw rod 125 cm

	SG 10434 Draw rod 150 cm
	SG 11335 End stop

SG 1080

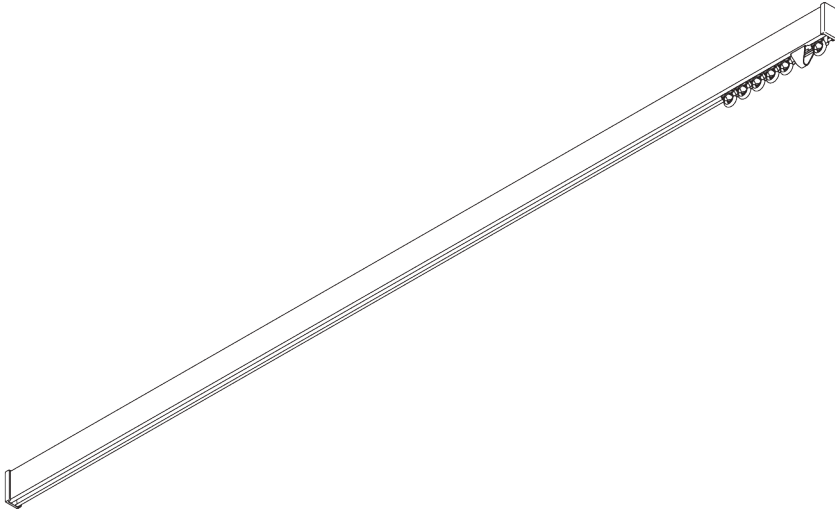

PRODUCT INFORMATION

- **Operation:** hand
- **Range:** S
- **Fitting:** ceiling, wall, suspended
- **Colours:** white RAL 9016, black RAL 9005 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- Bendable

SYSTEM SPECIFICATIONS

A. PROFILE

Profile and bending information




SG 1080p

Profile

 Radius:
6 cm, 10 cm, >30 cm

B. HOW TO MEASURE

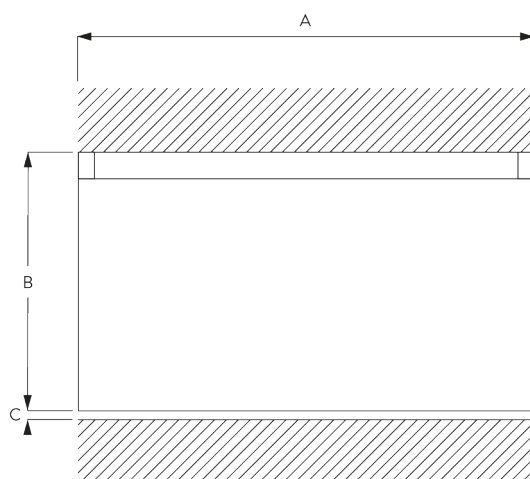

A: System width
B: System height
C: Distance between floor and fabric

C. SPECIFICATION TEXT

EN

Silent Gliss SG 1080 Hand Drawn Curtain Track System. Comprises aluminium profile SG1080 supplied made to measure in silver anodised or white powder coated, alternatively a specified RAL colour. SG 3533 at 14/m and 2 end covers SG 3605/ end stops SG 3070 per length. Top fixed with brackets SG 3603 at max. 600 mm centres / wall fix SG Smart Fix at max. 600 mm centres.

SV

Silent Gliss SG 1080 handdragssystem. Består av aluminiumprofil SG 1080 i specificerad längd i vitlack, alu natur eller angiven RAL färg. 14 st SG 3533 glid per meter, 2 st SG 3605 ändskydd samt 2 st SG 3070 vridstopp per system. Takmonteras med fäste SG 3603 c/c 600 mm. Väggmontering med Smart Fix c/c 600 mm.

NO

Silent Gliss SG 1080 manuelle gardinskinner. Systemet består av SG 1080 i ønsket legde, hvit, alu natur eller i valgfri RAL farge. 14 stk glidere SG 3533 pr. meter, 2 stk endelokk SG 3605 og 2 stk vridstopp SG 3070 pr system. Takmontering med feste SG 3603 c/c 600 mm. Veggmontering med Smart Fix c/c 600 mm.

DA


Silent Gliss SG 1080 håndtrukket gardinskinnesystem. Består af en aluminiumprofil SG 1080 i ønsket længde, sølvanodiseret eller hvid pulverlakering, alternativt en specificeret RAL-farve. 14 stk. SG 3533 glidere pr. m og 2 stk. endelåg SG 3605 samt 2 stk. SG 3070 endestop pr. længde. Loftmonteres med beslagene SG 3603 med højst 600 mm afstand. Vægmonteres med SG Smart Fix med højst 600 mm afstand

FITTING

A. FITTING INFORMATION



For detailed fitting information, visit the [Silent Gliss website](#).

Fixing points



B. CEILING FITTING


Bracket SG 3603

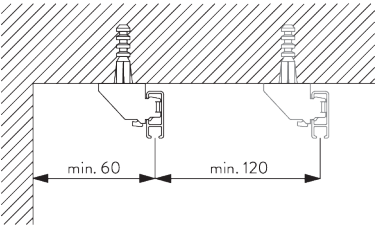


SG 3603
Bracket

C. WALL FITTING

Smart Fix




Smart Fix SG 11200 - SG 11205 and bracket SG 3603:
Screw SG 10492 (M4x8) needed.




Square Smart Fix SG 11210 - SG 11215 and bracket SG 3603:
Screw SG 10492 (M4x8) needed.

Smart Fix	X mm
SG 11200 / SG 11210	70
SG 11201 / SG 11211	90
SG 11202 / SG 11212	110
SG 11203 / SG 11213	130
SG 11204 / SG 11214	160
SG 11205 / SG 11215	210
SG 11154	120-148
SG 11155	150-178
SG 11156	200-228

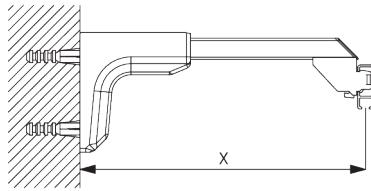

Universal Smart Fix SG 11154 - SG 11156 and bracket SG 3603:

Screw SG 10277 (M4x12) needed.



SG 3603

Bracket




SG 10492

Pan head screw M4x8




SG 10277

Pan head screw M4x12




SG 11200

Smart Fix 60 mm




SG 11201

Smart Fix 80 mm




SG 11202

Smart Fix 100 mm




SG 11203

Smart Fix 120 mm




SG 11204

Smart Fix 150 mm




SG 11205

Smart Fix 200 mm




SG 11210

Square Smart Fix 60 mm




SG 11211

Square Smart Fix 80 mm




SG 11212

Square Smart Fix 100 mm




SG 11213

Square Smart Fix 120 mm




SG 11214

Square Smart Fix 150 mm




SG 11215

Square Smart Fix 200 mm




SG 11154

Universal Smart Fix 120 mm



SG 11155


Universal Smart Fix 150 mm




SG 11156

Universal Smart Fix 200 mm


Universal brackets
SG 3630, SG 3655,
SG 3660




Bracket	X mm
SG 3630	33
SG 3655	48
SG 3660	63



SG 3630
Bracket 35 mm





SG 3655
Bracket 50 mm




SG 3660
Bracket 65 mm

D. **SUSPENDED**
FITTING


Hanger SG 3639 /
SG 3610 & wall
support SG 3602

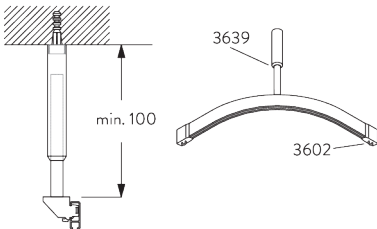

SG 3602
Wall support





SG 3639
Hanger













SG 3610
Hanger






















PARTS

A. STANDARD PARTS



	SG 1080p Profile
	SG 3070 End stop
	SG 3085 Spring stop
	SG 3533 Glider
	SG 3599 Hook
	SG 3603 Bracket
	SG 3605 End cover

B. OPTIONAL PARTS

	SG 3012 Hook		SG 3570 Glider
	SG 3016 End stop		SG 3571 Hook
	SG 3020 Hook		SG 3581 Hook
	SG 3032 Spring stop		SG 3582 Hook
	SG 3071 End stop		SG 3598 Eyelet
	SG 3089 Glider with hook		SG 3602 Wall support
	SG 3151 Spacer		SG 3604 Corner connector
	SG 3511 Glider		SG 3610 Hanger
	SG 3534 Glider 3533 on strip		SG 3618 Wall bracket
	SG 3535 Glider		SG 3620 Connection bridge
	SG 3537 Glider		SG 3626 Return holder
	SG 3548 Glider		SG 3630 Bracket 35 mm
	SG 3549 Click glider with hook		SG 3638 Corner connector
	SG 3555 Hook		SG 3639 Hanger

	SG 3648 Eyelet		SG 11156 Universal Smart Fix 200 mm
	SG 3655 Bracket 50 mm		SG 11200 Smart Fix 60 mm
	SG 3660 Bracket 65 mm		SG 11201 Smart Fix 80 mm
	SG 3667 End cover		SG 11202 Smart Fix 100 mm
	SG 6146 Hook		SG 11203 Smart Fix 120 mm
	SG 10277 Pan head screw M4x12		SG 11204 Smart Fix 150 mm
	SG 10430 Draw rod 50 cm		SG 11205 Smart Fix 200 mm
	SG 10431 Draw rod 75 cm		SG 11210 Square Smart Fix 60 mm
	SG 10432 Draw rod 100 cm		SG 11211 Square Smart Fix 80 mm
	SG 10433 Draw rod 125 cm		SG 11212 Square Smart Fix 100 mm
	SG 10434 Draw rod 150 cm		SG 11213 Square Smart Fix 120 mm
	SG 10492 Pan head screw M4x8		SG 11214 Square Smart Fix 150 mm
	SG 11154 Universal Smart Fix 120 mm		SG 11215 Square Smart Fix 200 mm
	SG 11155 Universal Smart Fix 150 mm		SG 11335 End stop

SG 1090

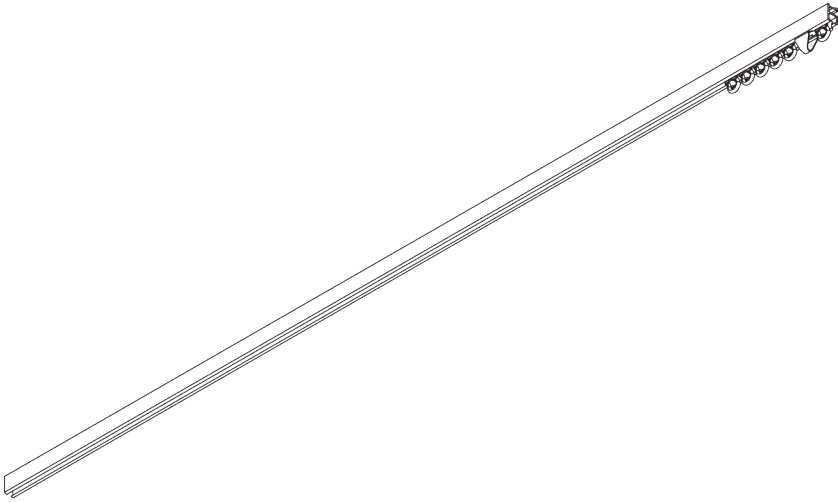

PRODUCT INFORMATION

- **Operation:** *hand*
- **Range:** *S*
- **Fitting:** *ceiling, wall*
- **Colours:** *white RAL 9016 or anodised aluminum, special colours possible*
- **Fabrics:** *refer to Silent Gliss fabric collection*


Features:

- *Bendable*

SYSTEM SPECIFICATIONS


A. PROFILE

Profile and bending information




SG 1090p

Profile



B. HOW TO MEASURE

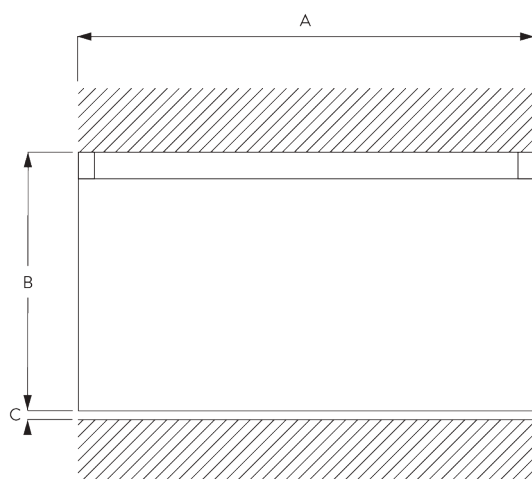

A: System width
B: System height
C: Distance between floor and fabric

C. SPECIFICATION TEXT

EN

Silent Gliss SG 1090 Hand Drawn Curtain Track System. Comprises aluminium profile SG1090 supplied made to measure in silver anodised or white powder coated, alternatively a specified RAL colour. SG 3533 at 14/m and 2 end stops SG 3070 per length. Top fix with SG 3176/3113/ 3115. Wall fix with SG 3176 w. SG Smart Fix at max. 400 mm centres.

SV

Silent Gliss SG 1090 handdragssystem. Består av aluminiumprofil SG 1090 i specificerad längd i vitlack, alu natur eller angiven RAL färg. 14 st SG 3533 glid per meter samt 2 st SG 3070 vridstopp per system. Takmonteras med fäste SG 3176/3113/3115 c/c 400 mm. Vägghmontering med SG 3176 med Smart Fix c/c 400 mm.

NO

Silent Gliss SG 1090 manuell gardinskinne. Består av aluminiumprofil SG 1080 i spesifisert lengde, standard i hvitlakkert eller alu natur. Kan også leveres i spesifisert RAL farge. 14 stk SG 3533 glidere pr meter, 2 stk SG 3070 stopper pr system. Takmonteres med feste SG 3176/3113/3115 c/c 400 mm. Veggmontering med SG 3176 med Smart Fix c/c 400 mm.

DA


Silent Gliss SG 1090 håndtrukket gardinskinnesystem. Består af en aluminiumprofil SG1090 i ønsket længde, sølvanodiseret eller hvid pulverlakering, alternativt en specificeret RAL-farve. 14 stk. SG 3533 pr. m og 2 stk. SG 3070 endestop pr. længde. Loftmonteres med SG 3176/3113/ 3115. Vægmonteres med SG 3176 med SG Smart Fix med en afstand på højst 400 mm.

FITTING

A. FITTING INFORMATION



For detailed fitting information, visit the [Silent Gliss website](#).

Fixing points




B. CEILING FITTING

Bracket SG 3176

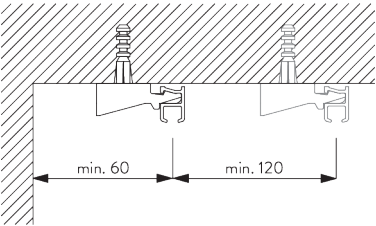


SG 3176
Bracket


Double ceiling bracket SG 3113 / SG 3115

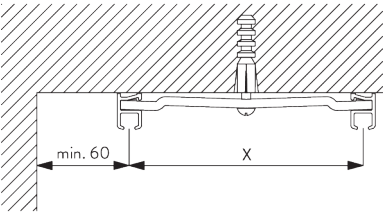


Support	X mm
SG 3113	57
SG 3115	80




SG 3113
Bracket



SG 3115
Bracket




SG 3255
Cover




SG 3256
Cover

C. WALL FITTING


Bracket SG 3175






SG 3175
Bracket

Smart Fix




Smart Fix SG 11200 - SG 11205 and bracket SG 3176:
Screw SG 10277 (M4x12) needed.



Square Smart Fix SG 11210 - SG 11215 and bracket SG 3176:
Screw SG 10277 (M4x12) needed.


Smart Fix	X mm
SG 11200 / SG 11210	68
SG 11201 / SG 11211	88
SG 11202 / SG 11212	108
SG 11203 / SG 11213	128
SG 11204 / SG 11214	158
SG 11205 / SG 11215	208




SG 3176
Bracket




SG 10277
Pan head screw M4x12




SG 11200
Smart Fix 60 mm




SG 11201
Smart Fix 80 mm




SG 11202
Smart Fix 100 mm




SG 11203
Smart Fix 120 mm




SG 11204
Smart Fix 150 mm




SG 11205
Smart Fix 200 mm




SG 11210
Square Smart Fix 60 mm




SG 11211
Square Smart Fix 80 mm



SG 11212
Square Smart Fix 100 mm




SG 11213
Square Smart Fix 120 mm



SG 11214

Square Smart Fix 150 mm




SG 11215







Square Smart Fix 200 mm






PARTS















A. STANDARD PARTS

	SG 1090p Profile
	SG 3070 End stop
	SG 3085 Spring stop
	SG 3533 Glider



B. OPTIONAL PARTS

	SG 3016 End stop
	SG 3020 Hook
	SG 3032 Spring stop
	SG 3071 End stop
	SG 3096 Connection bridge
	SG 3113 Bracket
	SG 3115 Bracket
	SG 3151 Spacer
	SG 3175 Bracket
	SG 3176 Bracket
	SG 3255 Cover
	SG 3256 Cover
	SG 3511 Glider
	SG 3534 Glider 3533 on strip

	SG 3535 Glider
	SG 3537 Glider
	SG 3548 Glider
	SG 3549 Click glider with hook
	SG 3570 Glider
	SG 3571 Hook
	SG 3582 Hook
	SG 3598 Eyelet
	SG 3599 Hook
	SG 10277 Pan head screw M4x12
	SG 10430 Draw rod 50 cm
	SG 10431 Draw rod 75 cm
	SG 10432 Draw rod 100 cm
	SG 10433 Draw rod 125 cm

	SG 10434 Draw rod 150 cm		SG 11335 End stop
	SG 10492 Pan head screw M4x8		
	SG 11200 Smart Fix 60 mm		
	SG 11201 Smart Fix 80 mm		
	SG 11202 Smart Fix 100 mm		
	SG 11203 Smart Fix 120 mm		
	SG 11204 Smart Fix 150 mm		
	SG 11205 Smart Fix 200 mm		
	SG 11210 Square Smart Fix 60 mm		
	SG 11211 Square Smart Fix 80 mm		
	SG 11212 Square Smart Fix 100 mm		
	SG 11213 Square Smart Fix 120 mm		
	SG 11214 Square Smart Fix 150 mm		
	SG 11215 Square Smart Fix 200 mm		

SG 3600

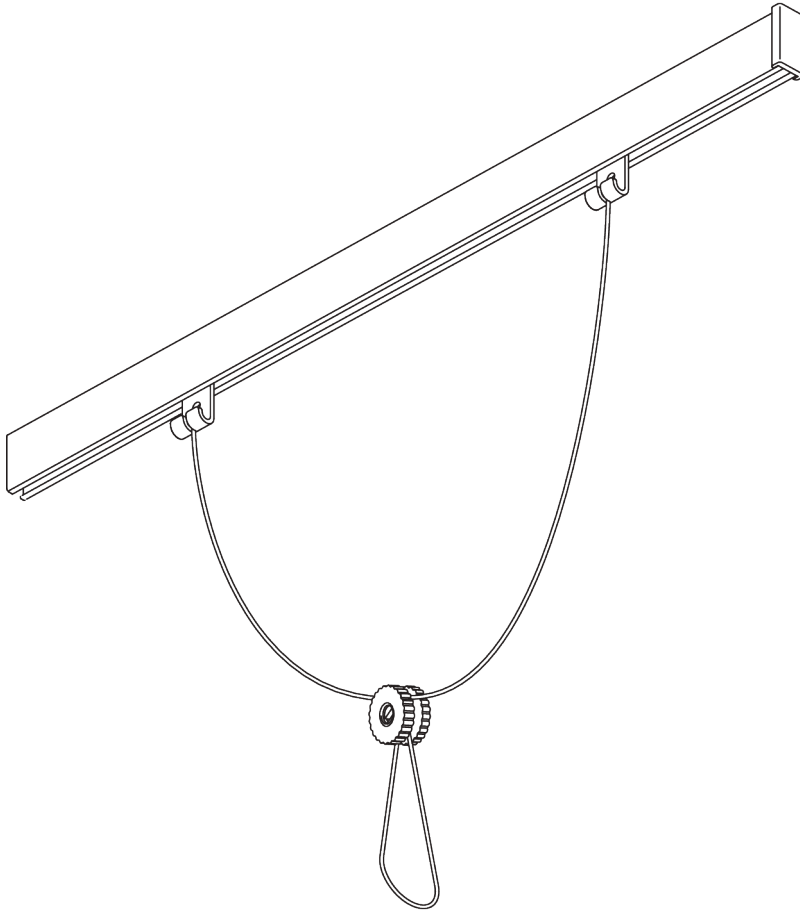

PRODUCT INFORMATION

- **Operation:** hand
- **Fitting:** wall
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible

Features:

- Picture hanging system
- Adjustable height

SYSTEM SPECIFICATIONS


A. SYSTEM DIMENSIONS



10 kg
(Total picture weight)


B. PROFILE

Profile and bending
information



SG 1080p
Profile

C. HOW TO MEASURE

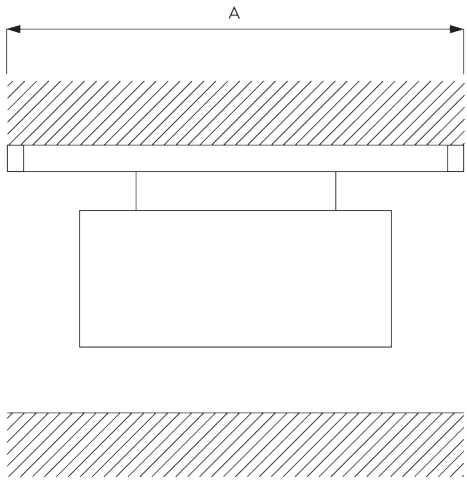

A: System width

D. SPECIFICATION

TEXT

EN

Silent Gliss SG 3600 Picture Hanging System. Comprises aluminium profile SG1080 supplied made to measure in silver anodised or white powder coated, alternatively a specified RAL colour. 2 pcs Endcaps SG 3605 per track. 1 pcs SG Picture hanging set SG 3665 per picture. Wall fix with SG 3606 clip.

SV

Silent Gliss SG 3600 tavelhångningssystem. Består av aluminiumprofil SG 1080 i specificerad längd i vitlack, alu natur eller angiven RAL färg. 2 st ändskydd SG 3605 per skena. 1 st tavelhångningsset SG 3665 per konstverk. Vägghållning med SG 3606 klips.

NO

Silent Gliss SG 3600 Bildeopphengssystem. Består av aluminiumprofil SG 1080 i spesifisert lengde, standard i hvitlakkert eller alu natur. Kan også leveres i spesifisert RAL farge. 2 stk endelukk SG 3605 pr skinne. 1 stk bildeopphengsett SG 3665 pr kunstverk. Veggmontering med SG 3606 klips.

DA


Silent Gliss SG 3600 billedophængningssystem. Består af en aluminiumprofil SG1080 i ønsket længde, sølvanodiseret eller hvid pulverlakering, alternativt en specificeret RAL-farve. 2 stk. endelåg SG 3605 pr. skinne. 1 stk. SG billedophængningssæt SG 3665 pr. billede. Vægmonteres med SG 3606 klips.

FITTING

A. FITTING INFORMATION



Fixing Points

For detailed fitting information, visit the Silent Gliss website.



B. WALL FITTING

Bracket SG 3606




SG 3606

Clip

C. HANGING UP OF PICTURE


Set SG 3665



Click-in hooks SG 3606.

Parts:


- SG 3634 Height adjuster
- SG 3637 Cord $\varnothing$ 1.5 mm
- SG 3663 Hook

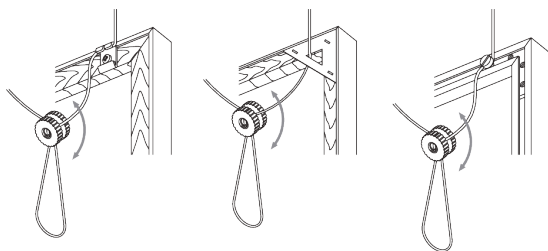



Picture height is adjusted by turning plastic screw.

PARTS



A. STANDARD PARTS

	SG 1080_p Profile
	SG 3605 End cover
	SG 3606 Clip
	SG 3665 Picture hanging set

B. OPTIONAL PARTS

	SG 3604 Corner connctor
	SG 3657 Connection bridge
	SG 3666 Clip

SG 6010

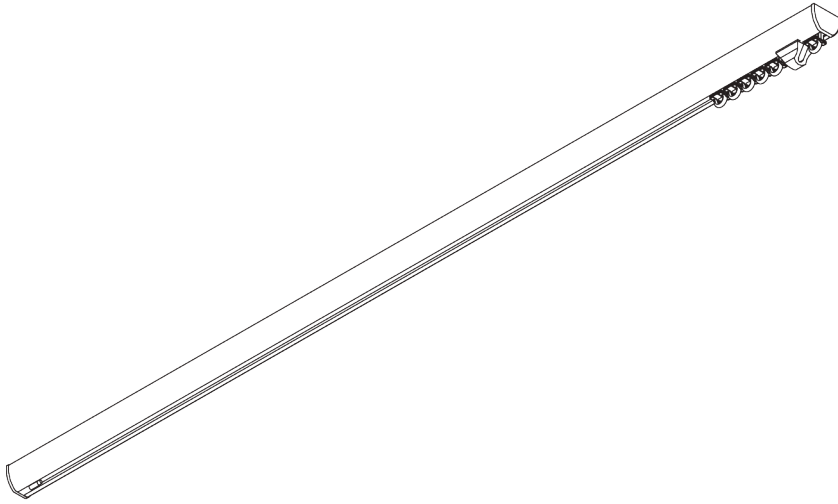

PRODUCT INFORMATION

- **Operation:** hand
- **Range:** S - M
- **Fitting:** ceiling, wall
- **Colours:** white RAL 9016, black RAL 9005 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- 2-component (2C) glider technology
- Wave (2C)
- Bendable

SYSTEM SPECIFICATIONS


A. PROFILE

Profile and bending information



SG 6010p


Profile



Radius:

15 cm, >25 cm

B. HOW TO MEASURE

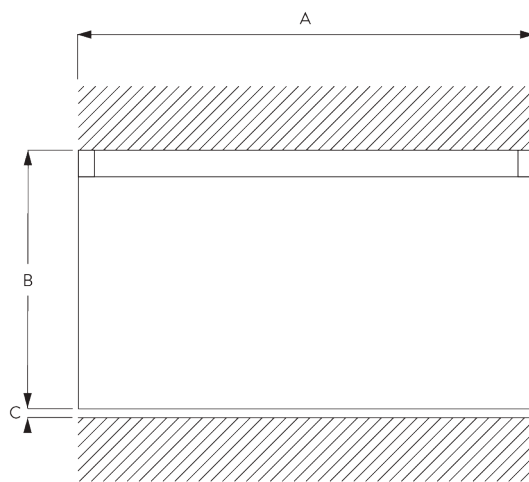

A: System width

B: System height

C: Distance between floor and fabric

C. SPECIFICATION

TEXT

EN

Silent Gliss SG 6010 Hand Drawn Curtain Track System. Comprises aluminium profile SG 6010 supplied made to measure in silver anodised or white powder coated, alternatively a specified RAL colour. SG 11300 SILENT TRACK at 14/m and 2 end covers SG 6018 and 2 end stops SG 6065 per length. 2 Top fix with SG 3825. Wall fix with SG 3825 w. SG Smart Fix at max. 500mm centres. Silent Gliss Wave option is available.

SV

Silent Gliss SG 6010 handdragssystem. Består av aluminiumprofil SG 6010 i specificerad längd i vitlack, alu natur eller angiven RAL färg. 14 st SG 11300 SILENT TRACK glid per meter, 2 st SG 6018 ändskydd samt 2 st SG 6065 vridstopp per system. Takmonteras med fäste SG 3825 c/c 500 mm. Vägghmontering med SG 3825 med Smart Fix c/c 500 mm. Kan användas med system Wave.

NO

Silent Gliss SG 6010 Manuell gardinskinne. Består av aluminiumprofil SG 6010 i spesifisert lengde, standard i hvitlakkert eller alu natur. Kan også leveres i spesifisert RAL farge. 14 stk SG 11300 SILENT TRACK glidere pr meter, 2 stk SG 6018 endeløkk og 2 stk SG 6065 stopper pr system. Veggmontering med SG 3825 med Smart Fix c/c 500mm. Kan kombineres med Wave.

DA


Silent Gliss SG 6010 håndtrukket gardinskinnesystem. Består af en aluminiumprofil SG 6010 i ønsket længde, sølvanodiseret eller hvid pulverlakering, alternativt en specificeret RAL-farve. 14 stk. SG 11300 SILENT TRACK pr. m og 2 stk. SG 6018 endelåg samt 2 stk. SG 6065 endestop pr. længde. Loftmonteres med SG 3825. Vægmonteres med SG 3825 med SG Smart Fix med en afstand på højst 500 mm. Kan bruges med Silent Gliss Wave.

FITTING

A. FITTING INFORMATION



For detailed fitting information, visit the *Silent Gliss* website.

Fixing points





B. CEILING FITTING

Clamp SG 3825

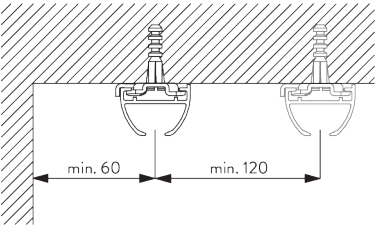

SG 3825
Clamp


Bracket SG 3832

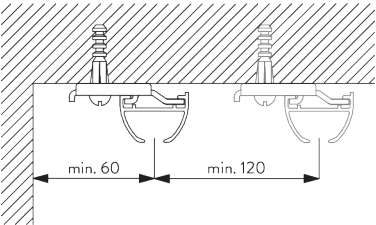


SG 3832
Bracket

C. WALL FITTING


Smart Fix




Smart Fix SG 11200 - SG 11205 and bracket SG 3832:
Screw SG 10492 (M4x8) needed.




Square Smart Fix SG 11210 - SG 11215 and bracket SG 3832:
Screw SG 10492 (M4x8) needed.

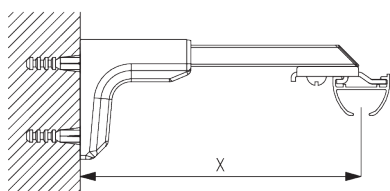


Universal Smart Fix SG 11154 - SG 11156 and bracket SG 3832:
Screw SG 10407 (M4x10) needed.



Smart Fix SG 11200 - SG 11205 and clamp SG 3825:
Screw SG 10074 (M4x8) needed.




Square Smart Fix SG 11210 - SG 11215 and clamp SG 3825:
Screw SG 10074 (M4x8) needed.

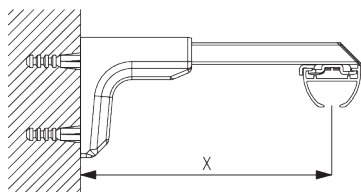


Universal Smart Fix SG 11154 - SG 11156 and clamp SG 3825:
Screw SG 11158 (M4x12) needed.

Smart Fix	X mm (SG 3832)	X mm (SG 3825)
SG 11200 / SG 11210	70	52
SG 11201 / SG 11211	90	72
SG 11202 / SG 11212	110	92
SG 11203 / SG 11213	130	112
SG 11204 / SG 11214	160	142
SG 11205 / SG 11215	210	192
SG 11154	120-148	102-130
SG 11155	150-178	132-160
SG 11156	200-228	182-210



SG 3825
Clamp



SG 3832
Bracket




SG 10407
Pan head screw M4x10




SG 10492
Pan head screw M4x8




SG 11158
Countersunk head screw
M4x12




SG 11200
Smart Fix 60 mm




SG 11201
Smart Fix 80 mm




SG 11202
Smart Fix 100 mm




SG 11203
Smart Fix 120 mm




SG 11204
Smart Fix 150 mm




SG 11205
Smart Fix 200 mm




SG 11210
Square Smart Fix 60 mm




SG 11211
Square Smart Fix 80 mm




SG 11212
Square Smart Fix 100 mm




SG 11213
Square Smart Fix 120 mm




SG 11214
Square Smart Fix 150 mm




SG 11215
Square Smart Fix 200 mm



SG 11154
Universal Smart Fix 120 mm




SG 11155
Universal Smart Fix 150 mm




SG 11156
Universal Smart Fix 200 mm

SYSTEM OPTIONS

A. WAVE






SG 11295

SG 11302

Standard components:

- SG 11295 End stop
- SG 11302 Wave 2C glider cord 80 mm



SG 2255

SG 2256

SG 6364

SG 6365




SG 6366

SG 10430-34

SG 11303

Optional components (min. radius: >25 cm):

- SG 2255 Brake
- SG 2256 Brake
- SG 6364 Wave extension
- SG 6365 Wave hanger
- SG 6366 Wave carrier for draw rod
- SG 10430-34 Draw rod
- SG 11303 Wave 2C glider cord 60 mm

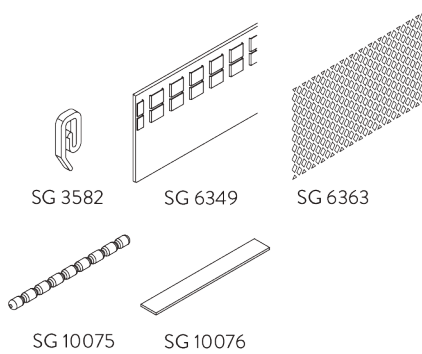

SG 3582

SG 6349

SG 6363


SG 10075

SG 10076

Curtain components:

- SG 3582 Hook
- SG 6349 Wave curtain tape
- SG 6363 Wave top hemming tape
- SG 10075 Lead weight 50 gr/m
- SG 10076 Fabric weight

Wave stack depth - 2C glider cord (standard components)

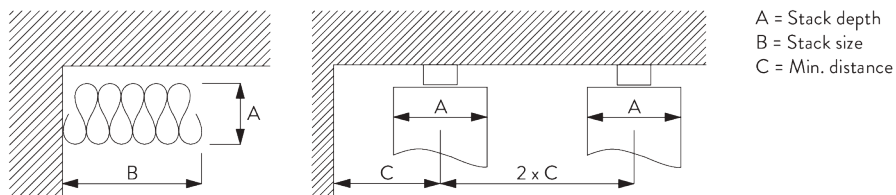

A = Stack depth
B = Stack size
C = Min. distance




2C Glider cord SG 11302	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
80	6	~2.1	140	180 per metre of track	90
80	7	~2.3	160	180 per metre of track	100

2C Glider cord SG 11303	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
60	4	~2.1	100	230 per metre of track	70
60	5	~2.3	120	230 per metre of track	80







*Stack size B when using optional extension arm increases
by 150 mm per curtain stack!









PARTS













A. STANDARD PARTS

	SG 3599 Hook
	SG 3825 Clamp
	SG 6010p Profile
	SG 6018 End cover
	SG 6065 End stop
	SG 6086 Spring stop
	SG 11300 2C glider



B. OPTIONAL PARTS

	SG 2255 Brake
	SG 2256 Brake
	SG 3012 Hook
	SG 3020 Hook
	SG 3571 Hook
	SG 3581 Hook
	SG 3582 Hook
	SG 3598 Eyelet
	SG 3802 Connection bridge
	SG 3832 Bracket
	SG 6005 Hook
	SG 6053 Spring stop
	SG 6057 Glider
	SG 6064 End stop

	SG 6082 Glider
	SG 6098 Roller
	SG 6240 Roller
	SG 6283 Roller
	SG 6349 Wave curtain tape
	SG 6363 Wave top hemming tape
	SG 6364 Wave extension
	SG 6365 Wave hanger
	SG 6366 Wave carrier for draw rod
	SG 10075 Lead weight 50 g/m
	SG 10076 Fabric weight
	SG 10407 Pan head screw M4x10
	SG 10430 Draw rod 50 cm
	SG 10431 Draw rod 75 cm

	SG 10432 Draw rod 100 cm		SG 11211 Square Smart Fix 80 mm
	SG 10433 Draw rod 125 cm		SG 11212 Square Smart Fix 100 mm
	SG 10434 Draw rod 150 cm		SG 11213 Square Smart Fix 120 mm
	SG 10492 Pan head screw M4x8		SG 11214 Square Smart Fix 150 mm
	SG 11154 Universal Smart Fix 120 mm		SG 11215 Square Smart Fix 200 mm
	SG 11155 Universal Smart Fix 150 mm		SG 11295 End stop
	SG 11156 Universal Smart Fix 200 mm		SG 11301 2C glider on strip
	SG 11200 Smart Fix 60 mm		SG 11302 Wave 2C glider cord 80 mm
	SG 11201 Smart Fix 80 mm		SG 11303 Wave 2C glider cord 60 mm
	SG 11202 Smart Fix 100 mm		SG 11305 2C glider for direct sewing
	SG 11203 Smart Fix 120 mm		
	SG 11204 Smart Fix 150 mm		
	SG 11205 Smart Fix 200 mm		
	SG 11210 Square Smart Fix 60 mm		

SG 6011

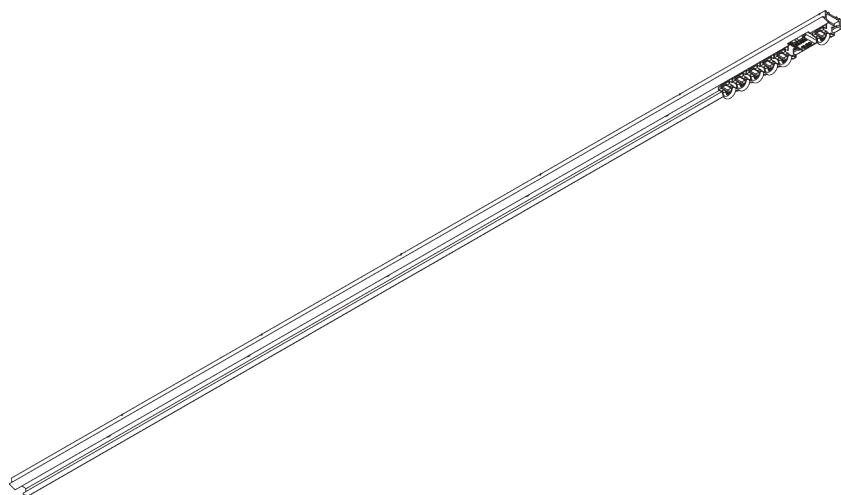

PRODUCT INFORMATION

- **Operation:** hand
- **Range:** S-M
- **Fitting:** recess (center SG 7550)
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- 2-component (2C) glider technology
- Pre-drilled profile
- Bendable

SYSTEM SPECIFICATIONS

A. PROFILE

Profile and bending information




SG 6011p

Profile

Radius:
✓ 10 cm, 20 cm

B. HOW TO MEASURE

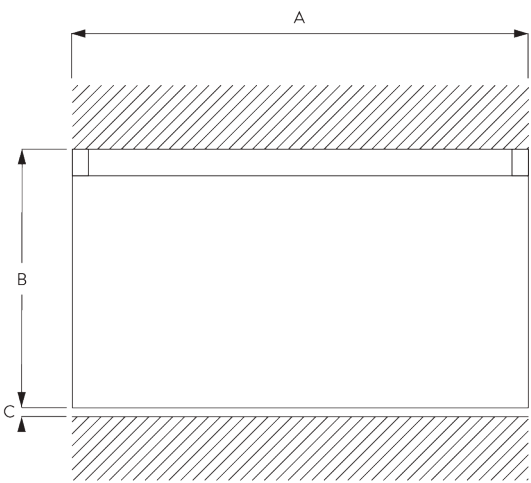


A: System width
B: System height
C: Distance between floor and fabric

FITTING

A. FITTING INFORMATION


For detailed fitting information, visit the [Silent Gliss website](#).

Fixing points



B. RECESS FITTING



Direct into wood

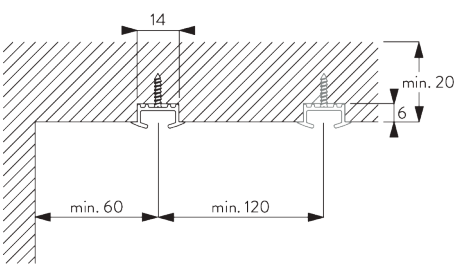











Recess channel: 6 x 14 mm


PARTS

A. STANDARD PARTS



	SG 3019 Special screw 12 mm
	SG 3599 Hook
	SG 6011p Profile
	SG 6015 Spring
	SG 6065 End stop
	SG 11300 2C glider

B. OPTIONAL PARTS

	SG 2255 Brake
	SG 2256 Brake
	SG 3012 Hook
	SG 3025 Special screw 18 mm
	SG 3067 Connection bridge
	SG 3582 Hook
	SG 6057 Glider
	SG 6082 Glider
	SG 10430 Draw rod 50 cm
	SG 10431 Draw rod 75 cm
	SG 10432 Draw rod 100 cm
	SG 10433 Draw rod 125 cm
	SG 10434 Draw rod 150 cm
	SG 11295 End stop

	SG 11301 2C glider on strip
	SG 11305 2C glider for direct sewing

SG 6026

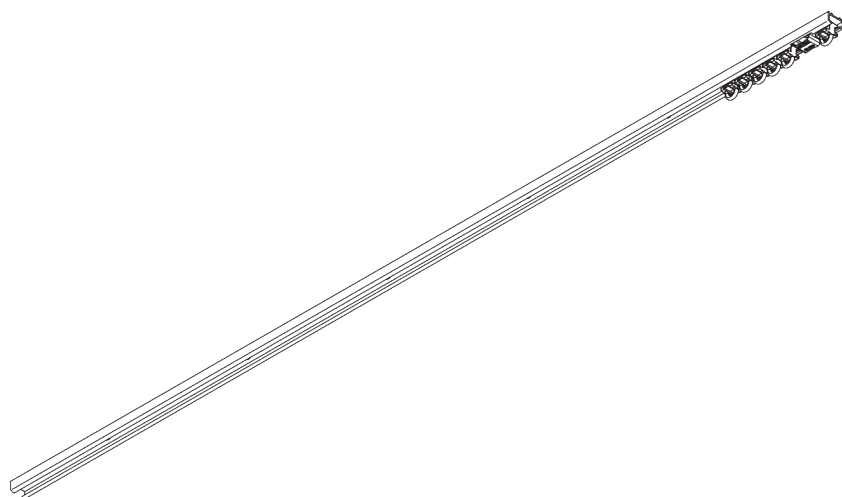

PRODUCT INFORMATION

- **Operation:** hand
- **Range:** S
- **Fitting:** ceiling (center SG 7550)
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- 2-component (2C) glider technology
- Pre-drilled profile
- Bendable

SYSTEM SPECIFICATIONS

A. PROFILE

Profile and bending information




SG 6026p

Profile

Radius:
✓ 10 cm, 20 cm

B. HOW TO MEASURE

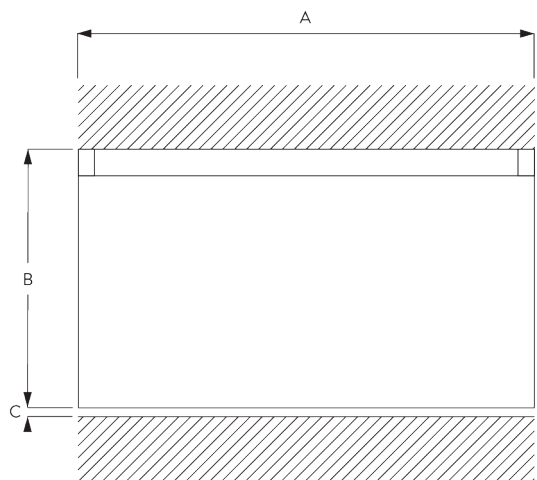


A: System width
B: System height
C: Distance between floor and fabric

FITTING

A. FITTING INFORMATION


Fixing points



For detailed fitting information, visit the Silent Gliss website.



B. CEILING FITTING

Direct into wood






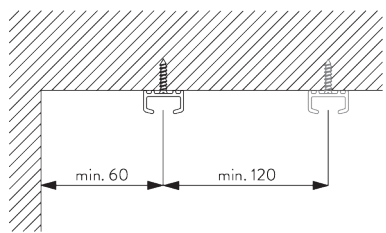






PARTS

A. STANDARD PARTS



	SG 3019 Special screw 12 mm
	SG 3599 Hook
	SG 6015 Spring
	SG 6026p Profile
	SG 6065 End stop
	SG 11300 2C glider

B. OPTIONAL PARTS

	SG 2255 Brake
	SG 2256 Brake
	SG 3012 Hook
	SG 3020 Hook
	SG 3025 Special screw 18 mm
	SG 3067 Connection bridge
	SG 3555 Hook
	SG 3571 Hook
	SG 3582 Hook
	SG 3598 Eyelet
	SG 6057 Glider
	SG 6064 End stop
	SG 6082 Glider
	SG 6245 Spring stop

	SG 10430 Draw rod 50 cm
	SG 10431 Draw rod 75 cm
	SG 10432 Draw rod 100 cm
	SG 10433 Draw rod 125 cm
	SG 10434 Draw rod 150 cm
	SG 11295 End stop
	SG 11301 2C glider on strip
	SG 11305 2C glider for direct sewing

SG 6035

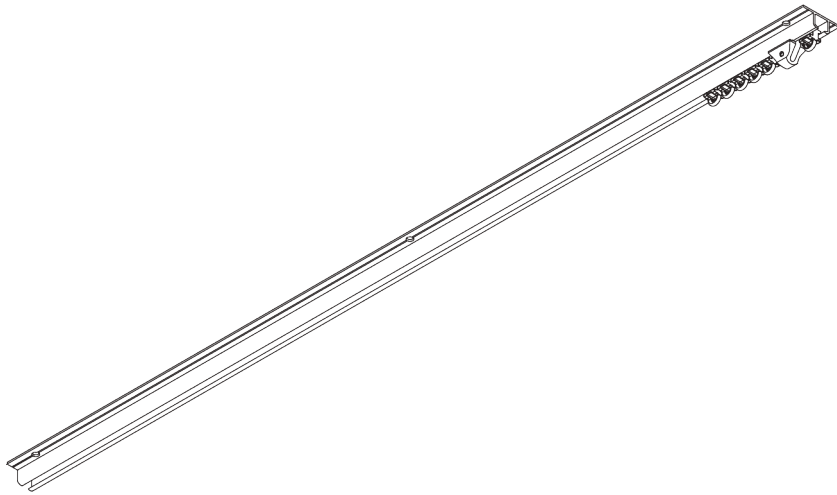

PRODUCT INFORMATION

- **Operation:** hand
- **Range:** M - L
- **Fitting:** ceiling
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- 2-component (2C) glider technology
- Wave (2C)
- Bendable
- Pre-drilled profile

SYSTEM SPECIFICATIONS

A. PROFILE


Profile and bending information



SG 6035p
Profile



B. HOW TO MEASURE

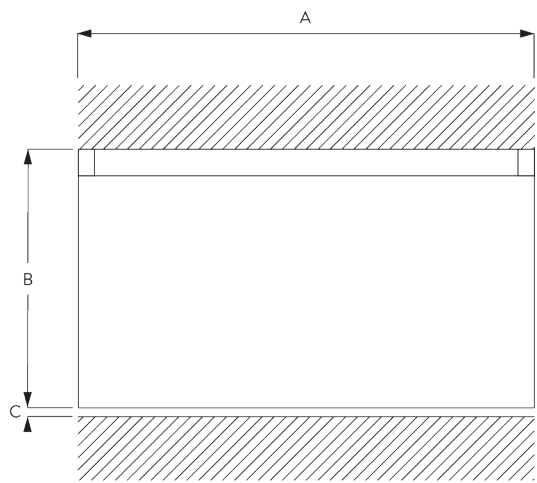


A: System width
B: System height
C: Distance between floor and fabric

FITTING

A. FITTING INFORMATION


Fixing points

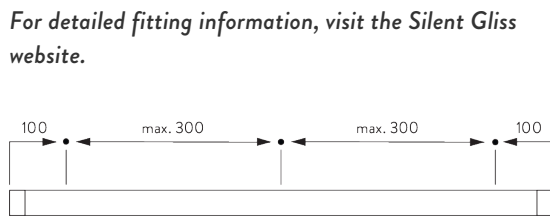

For detailed fitting information, visit the Silent Gliss website.


B. CEILING FITTING

Direct fitting

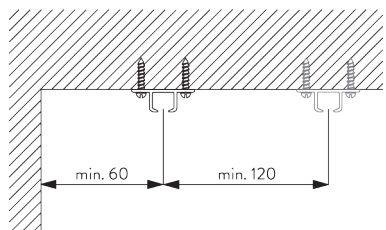


SYSTEM OPTIONS

A. WAVE



SG 11295



SG 11302

Standard components:


- SG 11295 End stop
- SG 11302 Wave 2C glider cord 80 mm



SG 2255



SG 2256




SG 6364




SG 6365

Optional components:


- SG 2255 Brake
- SG 2256 Brake
- SG 6364 Wave extension
- SG 6365 Wave hanger
- SG 6366 Wave carrier for draw rod
- SG 10430-34 Draw rod
- SG 11303 Wave 2C glider cord 60 mm



SG 6366




SG 10430-34




SG 11303



SG 3582




SG 6349



SG 6363

Curtain components:

- SG 3582 Hook
- SG 6349 Wave curtain tape
- SG 6363 Wave top hemming tape
- SG 10075 Lead weight 50 gr/m
- SG 10076 Fabric weight





SG 10075



SG 10076

Wave stack depth - 2C glider cord (standard components)

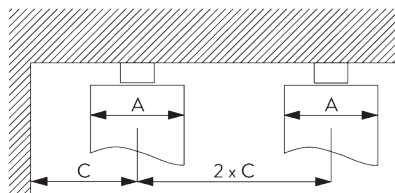

A = Stack depth
B = Stack size
C = Min. distance


2C Glider cord SG 11302	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
80	6	~2.1	140	180 per metre of track	90
80	7	~2.3	160	180 per metre of track	100

2C Glider cord SG 11303	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
60	4	~2.1	100	230 per metre of track	70
60	5	~2.3	120	230 per metre of track	80





*Stack size B when using optional extension arm SG 6364
increases by 150 mm per curtain stack!












PARTS

A. STANDARD PARTS

	SG 3599 Hook
	SG 6035p Profile
	SG 6065 End stop
	SG 6086 Spring stop
	SG 11300 2C glider

B. OPTIONAL PARTS


	SG 2255 Brake
	SG 2256 Brake
	SG 3012 Hook
	SG 3571 Hook
	SG 3582 Hook
	SG 6004 Eyelet
	SG 6005 Hook
	SG 6043 Connection bridge
	SG 6053 Spring stop
	SG 6057 Glider
	SG 6082 Glider
	SG 6094 Roller
	SG 6098 Roller
	SG 6240 Roller

	SG 6283 Roller
	SG 6349 Wave curtain tape
	SG 6363 Wave top hemming tape
	SG 6364 Wave extension
	SG 6365 Wave hanger
	SG 6366 Wave carrier for draw rod
	SG 10075 Lead weight 50 g/m
	SG 10076 Fabric weight
	SG 10430 Draw rod 50 cm
	SG 10431 Draw rod 75 cm
	SG 10432 Draw rod 100 cm
	SG 10433 Draw rod 125 cm
	SG 10434 Draw rod 150 cm
	SG 11295 End stop



SG 11301

2C glider on strip




SG 11302

Wave 2C glider cord 80 mm



SG 11303



Wave 2C glider cord 60 mm



SG 11305

2C glider for direct sewing

SG 6170

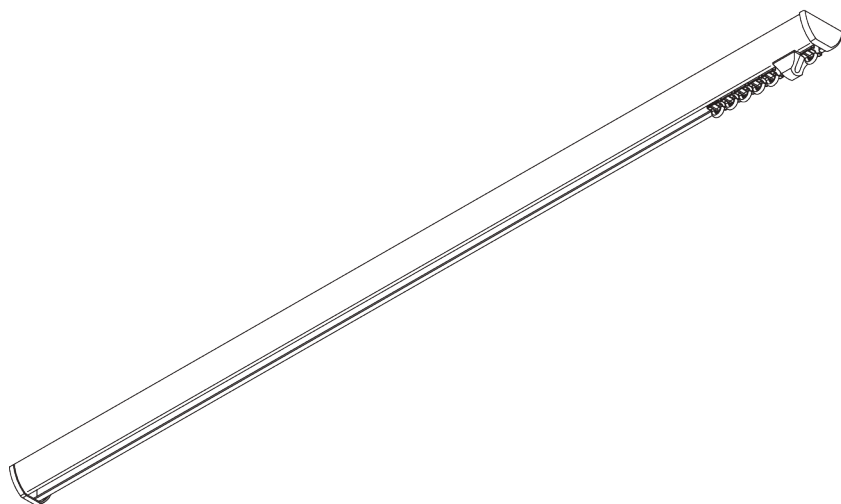

PRODUCT INFORMATION

- **Operation:** hand
- **Range:** M - L
- **Fitting:** ceiling
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- 2-component (2C) glider technology
- Wave (2C)
- Bendable

SYSTEM SPECIFICATIONS

A. PROFILE

Profile and bending information




SG 6170p

Profile

Radius:
✓ >25 cm

B. HOW TO MEASURE

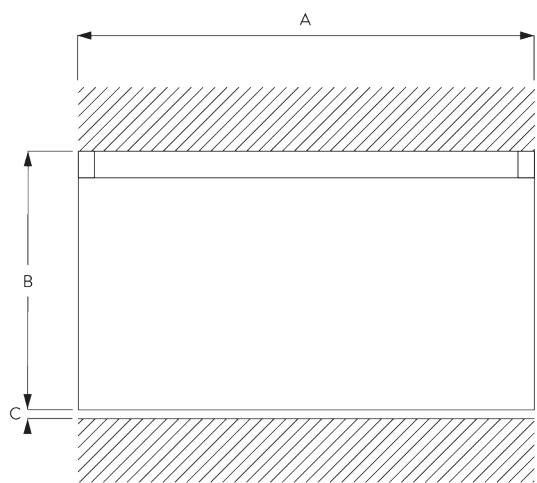


A: System width
B: System height
C: Distance between floor and fabric

FITTING

A. FITTING INFORMATION


Fixing points

For detailed fitting information, visit the Silent Gliss website.



B. CEILING FITTING

Clamp SG 3004

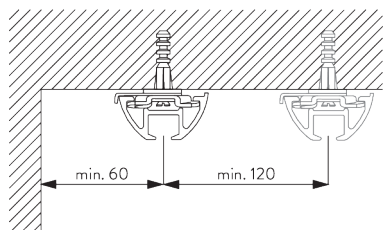




SG 3004


Clamp

SYSTEM OPTIONS

A. WAVE



SG 11295



SG 11302

Standard components:


- SG 11295 End stop
- SG 11302 Wave 2C glider cord 80 mm



SG 2255



SG 2256




SG 6364



SG 6365

Optional components (min. radius >30 cm):


- SG 2255 Brake
- SG 2256 Brake
- SG 6364 Wave extension
- SG 6365 Wave hanger
- SG 6366 Wave carrier for draw rod
- SG 10430-34 Draw rod
- SG 11303 Wave 2C glider cord 60 mm



SG 6366




SG 10430-34




SG 11303



SG 3582




SG 6349



SG 6363

Curtain components:

- SG 3582 Hook
- SG 6349 Wave curtain tape
- SG 6363 Wave iron tape
- SG 10075 Lead weight 50 gr/m
- SG 10076 Fabric weight





SG 10075



SG 10076

Wave stack depth - 2C glider cord (standard components)

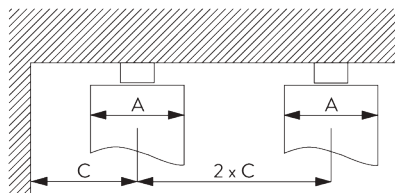

A = Stack depth
B = Stack size
C = Min. distance


2C Glider cord SG 11302	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
80	6	~2.1	140	180 per metre of track	90
80	7	~2.3	160	180 per metre of track	100

2C Glider cord SG 11303	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
60	4	~2.1	100	230 per metre of track	70
60	5	~2.3	120	230 per metre of track	80





*Stack size B when using optional extension arm SG 6364
increases by 150 mm per curtain stack!












PARTS

A. STANDARD PARTS



	SG 3004 Clamp
	SG 3599 Hook
	SG 6065 End stop
	SG 6086 Spring stop
	SG 6170p Profile
	SG 6172 End cover
	SG 11300 2C glider

B. OPTIONAL PARTS

	SG 2255 Brake
	SG 2256 Brake
	SG 3008 Connection bridge
	SG 3012 Hook
	SG 3582 Hook
	SG 6004 Eyelet
	SG 6005 Hook
	SG 6053 Spring stop
	SG 6082 Glider
	SG 6094 Roller
	SG 6098 Roller
	SG 6283 Roller
	SG 6349 Wave curtain tape
	SG 6363 Wave top hemming tape

	SG 6364 Wave extension
	SG 6365 Wave hanger
	SG 6366 Wave carrier for draw rod
	SG 10075 Lead weight 50 g/m
	SG 10076 Fabric weight
	SG 10430 Draw rod 50 cm
	SG 10431 Draw rod 75 cm
	SG 10432 Draw rod 100 cm
	SG 10433 Draw rod 125 cm
	SG 10434 Draw rod 150 cm
	SG 11295 End stop
	SG 11301 2C glider on strip
	SG 11302 Wave 2C glider cord 80 mm
	SG 11303 Wave 2C glider cord 60 mm

SG 6243

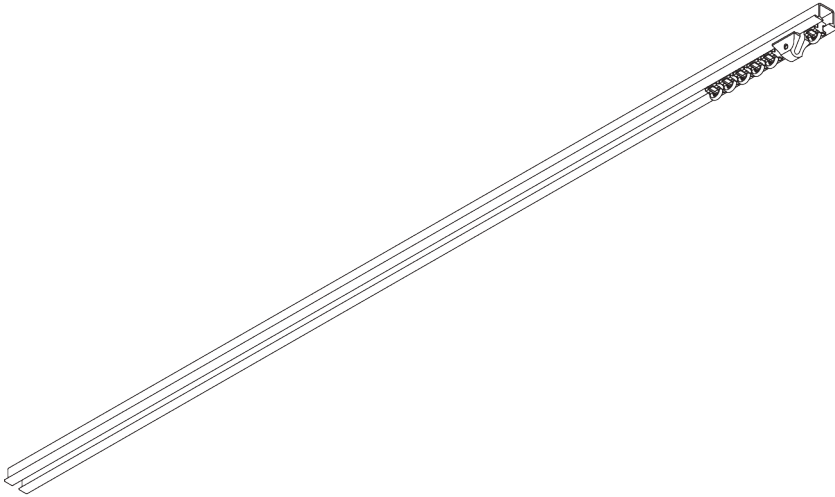

PRODUCT INFORMATION

- **Operation:** *hand*
- **Range:** *S - M*
- **Fitting:** *recess*
- **Colours:** *white RAL 9016, black RAL 9005 or anodised aluminum, special colours possible*
- **Fabrics:** *refer to Silent Gliss fabric collection*


Features:

- *2-component (2C) glider technology*
- *Wave (2C)*
- *Bendable*
- *Pre-drilled profile*

SYSTEM SPECIFICATIONS

A. PROFILE

Profile and bending information




SG 6243p

Profile

Radius:
✓ 20 cm, >25 cm

B. HOW TO MEASURE

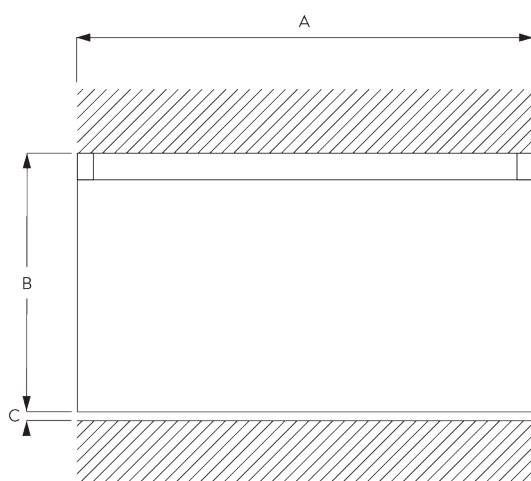

A: System width
B: System height
C: Distance between floor and fabric

C. SPECIFICATION TEXT

EN

Silent Gliss SG 6243 Hand Drawn Curtain Track System for recessed fitting. Comprises aluminium profile SG 6243 supplied made to measure in silver anodised or white powder coated, alternatively a specified RAL colour. SG 11300 SILENT TRACK at 14/m and 2 end stops SG 6065/Spring Stops SG 6086 per length. Top fix to ceiling with screws at max. 240 mm centres. Silent Gliss Wave option is available.

SV

Silent Gliss SG 6243 handdragssystem för infällning. Består av aluminiumprofil SG 6243 i specificerad längd i vitlack, alu natur eller angiven RAL färg. 14 st SG 11300 SILENT TRACK glid per meter, samt 2 st SG 6065 vridstopp / Fjäder SG 6086 per system. Takmonteras med skruv c/c 240 mm. Kan användas med system Wave.

NO

Silent Gliss SG 6243 Manuell gardinskinne for innfelling. Består av aluminiumprofil SG 6243 i spesifisert lengde, standard i hvitlakkert eller alu natur. Kan også leveres i spesifisert RAL farge. 14 stk SG 11300 SILENT TRACK glidere pr meter, 2 stk SG 6065 stopper og 2 stk SG 6086 fjær pr system. Takmonteres med skruer c/c 240mm. Kan kombineres med Wave.

DA


Silent Gliss SG 6243 håndtrukket gardinskinnesystem til indfældning. Består af en aluminiumprofil SG 6243 i ønsket længde, sølvanodiseret eller hvid pulverlakering, alternativt en specificeret RAL-farve. 14 stk. SG 11300 SILENT TRACK pr. m og 2 stk. SG 6065 endestop eller SG 6086 fjeder pr. længde. Fastgøres i loftet med skruer med højst 240 mm afstand. Kan bruges med Silent Gliss Wave.

FITTING

A. FITTING INFORMATION


For detailed fitting information, visit the *Silent Gliss* website.

Fixing points



B. RECESS FITTING



Direct into wood

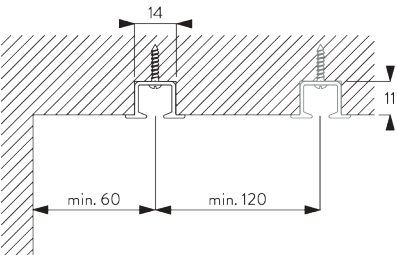


Recess channel: 11 x 14 mm

SYSTEM OPTIONS

A. WAVE




- Standard components:
- SG 11295 End stop
 - SG 11302 Wave 2C glider cord 80 mm

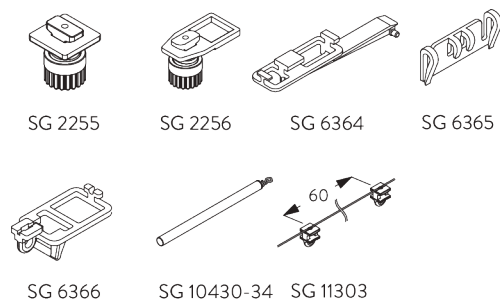

Optional components (min. radius >25 cm):


- SG 2255 Brake
- SG 2256 Brake
- SG 6364 Wave extension
- SG 6365 Wave hanger
- SG 6366 Wave carrier for draw rod
- SG 10430-34 Draw rod
- SG 11303 Wave 2C glider cord 60 mm

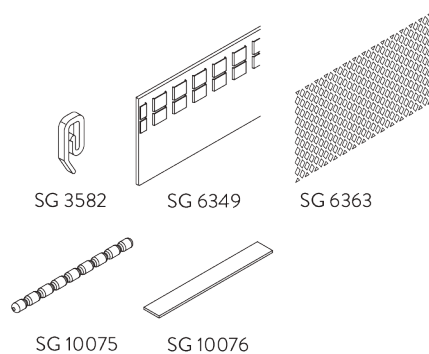

Curtain components:

- SG 3582 Hook
- SG 6349 Wave curtain tape
- SG 6363 Wave top hemming tape
- SG 10075 Lead weight 50 gr/m
- SG 10076 Fabric weight

Wave stack depth - 2C glider cord (standard components)

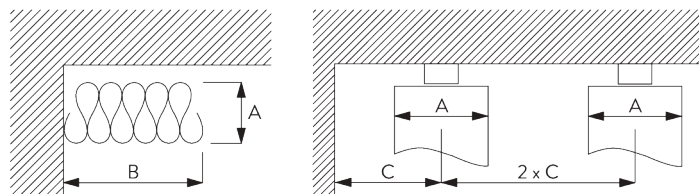

A = Stack depth
B = Stack size
C = Min. distance



2C Glider cord SG 11302	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
80	6	~2.1	140	180 per metre of track	90
80	7	~2.3	160	180 per metre of track	100

2C Glider cord SG 11303	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
60	4	~2.1	100	230 per metre of track	70
60	5	~2.3	120	230 per metre of track	80






*Stack size B when using optional extension arm increases
by 150 mm per curtain!






PARTS


A. STANDARD PARTS

	SG 3599 Hook
	SG 6065 End stop
	SG 6086 Spring stop
	SG 6243p Profile
	SG 10717 Countersunk head screw 2.2x19
	SG 11300 2C glider

B. OPTIONAL PARTS


	SG 2255 Brake
	SG 2256 Brake
	SG 3012 Hook
	SG 3020 Hook
	SG 3067 Connection bridge
	SG 3571 Hook
	SG 3582 Hook
	SG 3598 Eyelet
	SG 6053 Spring stop
	SG 6057 Glider
	SG 6064 End stop
	SG 6082 Glider
	SG 6094 Roller
	SG 6098 Roller

	SG 6240 Roller
	SG 6283 Roller
	SG 6349 Wave curtain tape
	SG 6363 Wave top hemming tape
	SG 6364 Wave extension
	SG 6365 Wave hanger
	SG 6366 Wave carrier for draw rod
	SG 7002 Profile protector
	SG 10075 Lead weight 50 g/m
	SG 10076 Fabric weight
	SG 10430 Draw rod 50 cm
	SG 10431 Draw rod 75 cm
	SG 10432 Draw rod 100 cm
	SG 10433 Draw rod 125 cm



SG 10434

Draw rod 150 cm




SG 11295

End stop



SG 11301

2C glider on strip




SG 11302

Wave 2C glider cord 80 mm



SG 11303



Wave 2C glider cord 60 mm



SG 11305

2C glider for direct sewing

SG 6244

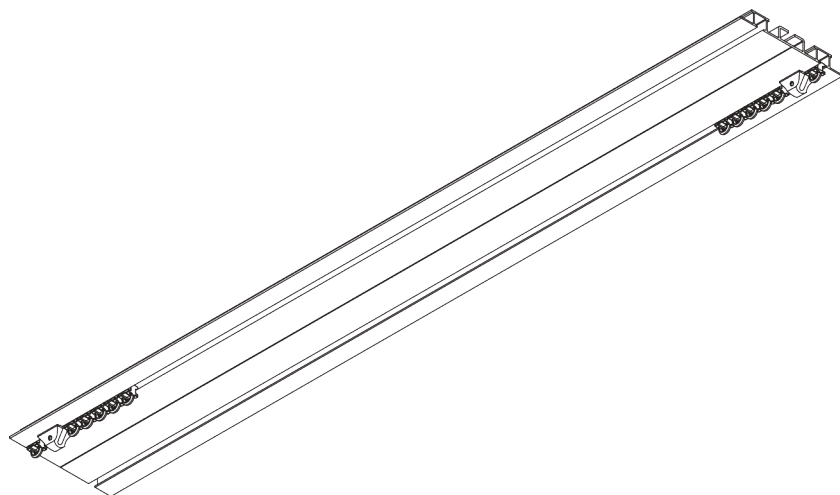

PRODUCT INFORMATION

- **Operation:** hand
- **Range:** M - L
- **Fitting:** recess
- **Colours:** white RAL 9016, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- 2-component (2C) glider technology

SYSTEM SPECIFICATIONS

A. PROFILE


Profile information



SG 6244p

Profile

B. HOW TO MEASURE

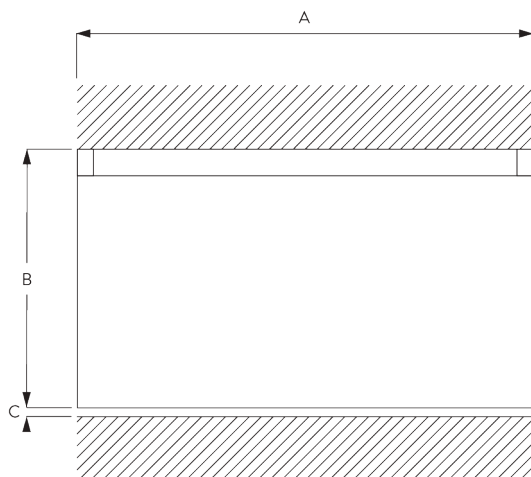

A: System width

B: System height

C: Distance between floor and fabric

C. SPECIFICATION

EN

Silent Gliss SG 6244 Hand Drawn Curtain Track System for recessed fitting. Comprises aluminium profile SG 6244 supplied made to measure in silver anodised or white powder coated, alternatively a specified RAL colour. SG 11300 SILENT TRACK at 14/m/track and 4 Spring Stops SG 6086 per length. Top fix to ceiling with screws at max. 400 mm centres.

SV

Silent Gliss SG 6244 handdragssystem för infällning. Består av aluminiumprofil SG 6244 i specificerad längd i vitlack, alu natur eller angiven RAL färg. 14 st SG 11300 SILENT TRACK glid per meter/spår samt 4 st SG 6068 fjäder per system. Takmonteras med skruv c/c 400 mm.

NO

Silent Gliss SG 6244 Manuell gardinskinne for innfelling. Består av aluminiumprofil SG 6244 i spesifisert lengde, standard i hvitlakkert eller alu natur. Kan også leveres i spesifisert RAL farge. 14 stk SG 11300 SILENT TRACK glidere pr meter/spor, 4 stk SG 6068 fjær pr system. Takmonteres med skrue c/c 400 mm.

DA


Silent Gliss SG 6244 håndtrukket gardinskinnesystem til indfældning. Består af en aluminiumprofil SG 6244 i ønsket længde, sølvanodiseret eller hvid pulverlakering, alternativt en specificeret RAL-farve. 14 stk. SG 11300 SILENT TRACK pr. m og 4 stk. SG 6086 fjeder pr. længde. Fastgøres i loftet med skruer med højst 400 mm afstand.

FITTING

A. FITTING INFORMATION


For detailed fitting information, visit the *Silent Gliss* website.

Fixing points




B. RECESS FITTING

Direct fitting




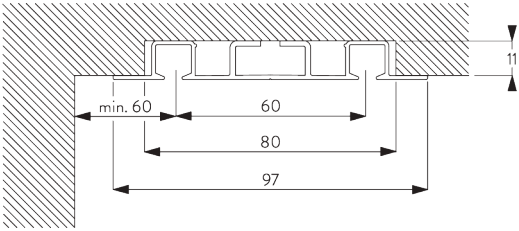










PARTS

A. STANDARD PARTS



	SG 3599 Hook
	SG 6086 Spring stop
	SG 6244p Profile
	SG 11300 2C glider

B. OPTIONAL PARTS

	SG 3020 Hook
	SG 3555 Hook
	SG 3571 Hook
	SG 3581 Hook
	SG 3582 Hook
	SG 3598 Eyelet
	SG 6004 Eyelet
	SG 6005 Hook
	SG 6053 Spring stop
	SG 6057 Glider
	SG 6064 End stop
	SG 6065 End stop
	SG 6075 End stop with hook
	SG 6082 Glider

	SG 6094 Roller
	SG 6098 Roller
	SG 6145 Glider with hook
	SG 6240 Roller
	SG 6246 Corner connection
	SG 6248 Connection bridge
	SG 6283 Roller
	SG 10430 Draw rod 50 cm
	SG 10431 Draw rod 75 cm
	SG 10432 Draw rod 100 cm
	SG 10433 Draw rod 125 cm
	SG 10434 Draw rod 150 cm
	SG 11295 End stop

SG 6250

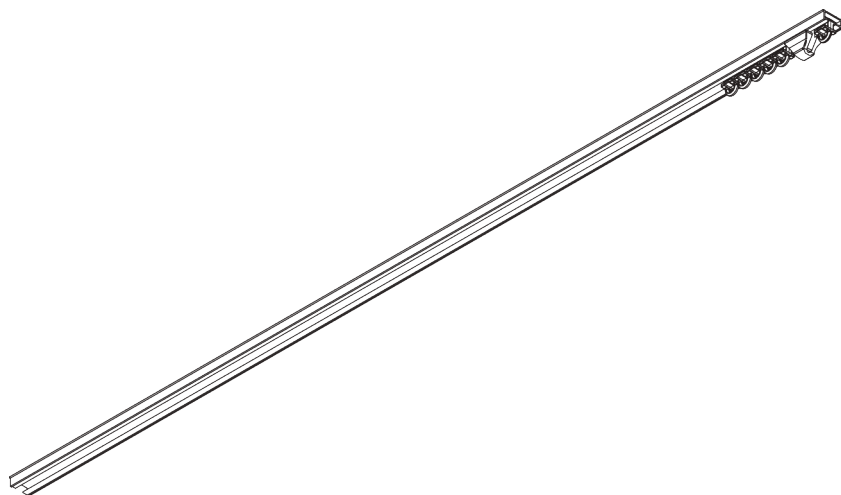

PRODUCT INFORMATION

- **Operation:** *hand*
- **Range:** *S - M*
- **Fitting:** *recess*
- **Colours:** *white RAL 9016*
- **Fabrics:** *refer to Silent Gliss fabric collection*


Features:

- *2-component (2C) glider technology*
- *Wave (2C)*
- *Bendable*

SYSTEM SPECIFICATIONS

A. PROFILE

Profile and bending information




SG 11220

Profile with cover

 Radius:
10 cm, 20 cm

B. HOW TO MEASURE

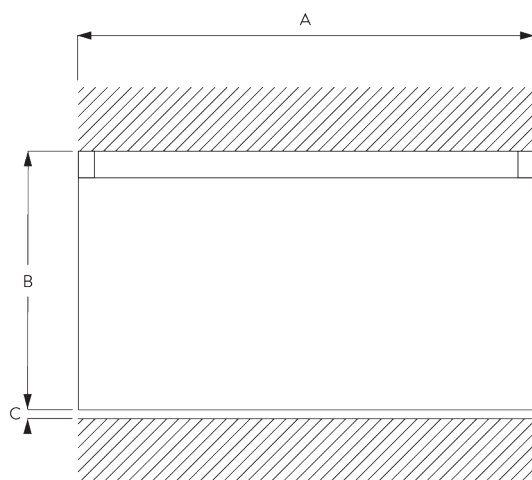

A: System width

B: System height

C: Distance between floor and fabric

C. SPECIFICATION TEXT

EN

Silent Gliss SG 6250 Hand Drawn Curtain Track System for recessed fitting. Comprises aluminium profile SG 11220 supplied made to measure in white powder coated, SG 11300 SILENT TRACK at 14/m and 2 Spring Stops SG 6245 per length. Top fix to ceiling with glue. Silent Gliss Wave option is available.

SV

Silent Gliss SG 6250 handdragssystem för infällning. Består av aluminiumprofil SG 11220 i specificerad längd i vitlack. 14 st SG 11300 SILENT TRACK glid per meter samt 2 st SG 6245 fjäder per system. Takmonteras med bygglim. Kan användas med system Wave.

NO

Silent Gliss SG 6250 Manuell gardinskinne for innfelling. Består av aluminiumprofil SG 11220 i spesifisert hvitlakkert lengde. 14 stk SG 11300 SILENT TRACK glide per meter, 2 stk SG 6245 fjær pr system. Takmonteres med bygglim. Kan brukes med Wave system.

DA


Silent Gliss SG 6250 håndtrukket gardinskinnesystem til indfældning. Består af aluminiumprofil SG 11220 i ønsket længde, hvid pulverlakering. 14 stk. SG 11300 SILENT TRACK pr. m og 2 stk. SG 6245 fjeder pr. længde. Fastgøres i loftet med lim. Kan bruges med Silent Gliss Wave.

FITTING

A. FITTING INFORMATION

For detailed fitting information, visit the Silent Gliss website, login section.



B. RECESS FITTING

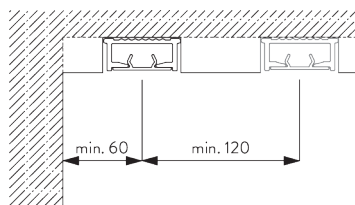

Adhesive assembly exclusively on raw concrete.

SYSTEM OPTIONS

A. WAVE




SG 11295

SG 11302

Standard components:


- SG 11295 End stop
- SG 11302 Wave 2C glider cord 80 mm



SG 11303

Optional components:



- SG 11303 Wave 2C glider cord 60 mm

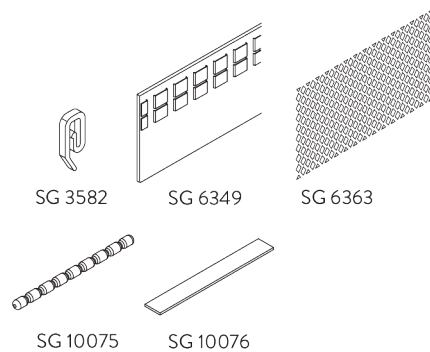

Curtain components:

- SG 3582 Hook
- SG 6349 Wave curtain tape
- SG 6363 Wave top hemming tape
- SG 10075 Lead weight 50 gr/m
- SG 10076 Fabric weight

Wave stack depth - 2C glider cord (standard components)

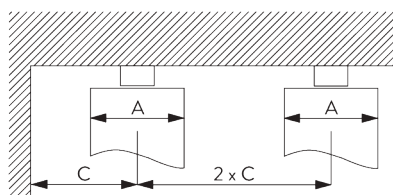




A = Stack depth
B = Stack size
C = Min. distance

2C Glider cord SG 11302	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
80	6	~2.1	140	180 per metre of track	90
80	7	~2.3	160	180 per metre of track	100







2C Glider cord SG 11303	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
60	4	~2.1	100	230 per metre of track	70
60	5	~2.3	120	230 per metre of track	80

PARTS



A. STANDARD PARTS

	SG 3599 Hook
	SG 6065 End stop
	SG 6245 Spring stop
	SG 11220 Profile with cover
	SG 11300 2C glider

B. OPTIONAL PARTS

	SG 3012 Hook
	SG 3582 Hook
	SG 6057 Glider
	SG 6082 Glider
	SG 6349 Wave curtain tape
	SG 6363 Wave top hemming tape
	SG 10075 Lead weight 50 g/m
	SG 10076 Fabric weight
	SG 11222 Connector
	SG 11295 End stop
	SG 11301 2C glider on strip
	SG 11302 Wave 2C glider cord 80 mm
	SG 11303 Wave 2C glider cord 60 mm
	SG 11305 2C glider for direct sewing

SG 6293

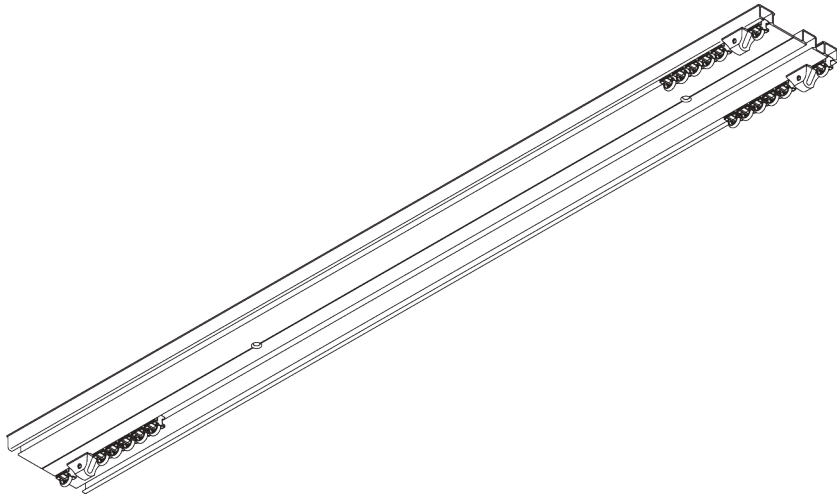

PRODUCT INFORMATION

- **Operation:** hand
- **Range:** M - L
- **Fitting:** ceiling
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- 2-component (2C) glider technology
- Pre-drilled profile

SYSTEM SPECIFICATIONS

A. PROFILE


Profile information



SG 6293p

Profile

B. HOW TO MEASURE

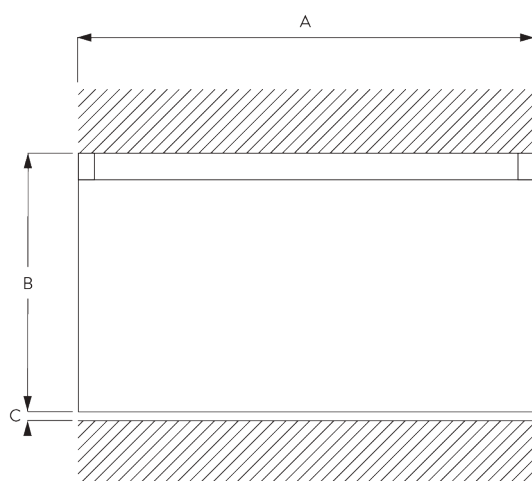

A: System width

B: System height

C: Distance between floor and fabric

C. SPECIFICATION

TEXT

EN

Silent Gliss SG 6293 Hand Drawn Curtain Track System for recessed fitting. Comprises aluminium profile SG 6293 supplied made to measure in silver anodised or white powder coated, alternatively a specified RAL colour. SG 11300 SILENT TRACK at 14/m/track and 6 SG 6065 End stops / SG 6086 Spring Stops per length. Top fix to ceiling with screws at max. 400 mm centres.

SV

Silent Gliss SG 6293 handdragssystem för infällning. Består av aluminiumprofil SG 6293 i specificerad längd i vitlack, alu natur eller angiven RAL färg. 14 st SG 11300 SILENT TRACK glid per meter/spår samt 6 st SG 6065 vridstopp / SG 6086 fjäder per system. Takmonteras med skruv c/c 400 mm.

NO

Silent Gliss SG 6293 Manuell gardinskinne for innfelling. Består av aluminiumprofil SG 6293 i spesifisert lengde, standard i hvitlakkert eller alu natur. Kan også leveres i spesifisert RAL farge. 14 stk SG 11300 SILENT TRACK glidere pr meter/spor, 6 stk SG 6065 vrilstopp/SG 6086 fjær pr system. Takmonteres med skrue c/c 400 mm.

DA


Silent Gliss SG 6293 håndtrukket gardinskinnesystem til indfældning. Består af en aluminiumprofil SG 6293 i ønsket længde, sølvanodiseret eller hvid pulverlakering, alternativt en specificeret RAL-farve. 14 stk. SG 11300 SILENT TRACK pr. m/skinne og 6 stk. SG 6065 endestop eller SG 6086 fjeder pr. længde. Fastgøres i loftet med skruer med højst 400 mm afstand.

FITTING

A. FITTING INFORMATION


For detailed fitting information, visit the *Silent Gliss* website.

Fixing points




B. CEILING FITTING

Direct fitting














PARTS

A. STANDARD PARTS



	SG 3599 Hook
	SG 6065 End stop
	SG 6086 Spring stop
	SG 6293p Profile
	SG 11300 2C glider

B. OPTIONAL PARTS

	SG 3012 Hook
	SG 3581 Hook
	SG 3598 Eyelet
	SG 6053 Spring stop
	SG 6057 Glider
	SG 6082 Glider
	SG 6094 Roller
	SG 6098 Roller
	SG 6240 Roller
	SG 6246 Corner connection
	SG 6269 Connection bridge
	SG 6283 Roller
	SG 10430 Draw rod 50 cm
	SG 10431 Draw rod 75 cm

	SG 10432 Draw rod 100 cm
	SG 10433 Draw rod 125 cm
	SG 10434 Draw rod 150 cm
	SG 11295 End stop
	SG 11301 2C glider on strip
	SG 11305 2C glider for direct sewing

SG 6380

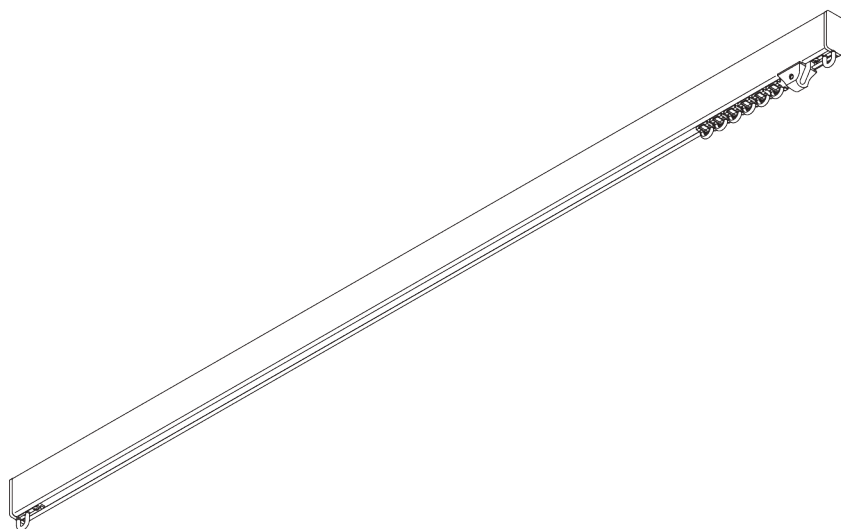

PRODUCT INFORMATION

- **Operation:** hand
- **Range:** M - L
- **Fitting:** ceiling, wall
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- 2-component (2C) glider technology
- Wave (2C)
- Bendable

SYSTEM SPECIFICATIONS


A. PROFILE

Profile and bending information




SG 6380p

Profile



B. HOW TO MEASURE

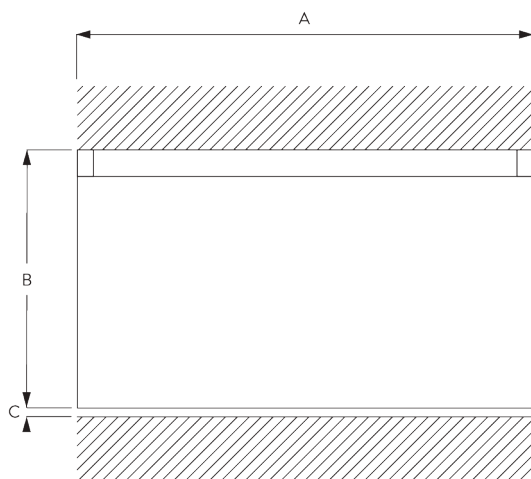

A: System width
B: System height
C: Distance between floor and fabric

C. SPECIFICATION

TEXT

EN

Silent Gliss SG 6380 Hand Drawn Curtain Track System. Comprises aluminium profile SG 6380 supplied made to measure in silver anodised or white powder coated, alternatively a specified RAL colour. SG 11130 at 14/m and 2 end covers SG 6381. Top fixed with brackets SG 3603 at max. 600 mm centres / wall fix SG Smart Fix at max. 600 mm centres. Silent Gliss Wave option is available.

SV

Silent Gliss SG 6380 handdragssystem. Består av aluminiumprofil SG 6380 i specificerad längd i vitlack, alu natur eller angiven RAL färg. 14 st SG 11300 SILENT TRACK glid per meter, 2 st SG 6381 ändskydd per system. Takmonteras med fäste SG 3603 c/c 600 mm. Vägghängning med SG 3603 och Smart Fix c/c 600 mm. Kan användas med system Wave.

NO

Silent Gliss SG 6380 Manuell gardinskinne. Består av aluminiumprofil SG 6380 i spesifisert lengde, standard i hvitlakkert eller alu natur. Kan også leveres i spesifisert RAL farge. 14 stk SG 11300 SILENT TRACK glidere pr meter, 2 stk SG 6381 endeløkk pr system. Takmonteres med fester 3603 c/c 600 mm. Veggmontering med SG 3603 og smart Fix c/c 600 mm. Kan benyttes med Wave system.

DA


Silent Gliss SG 6380 håndtrukket gardinskinnesystem. Består af en aluminiumprofil SG 6380 i ønsket længde, sølvanodiseret eller hvid pulverlakering, alternativt en specificeret RAL-farve. 14 stk. SG 11130 pr. m og 2 stk. SG 6381 endelåg. Loftmonteres med beslagene SG 3603 med højst 600 mm afstand. Vægmonteres med SG Smart Fix med højst 600 mm afstand. Kan bruges med Silent Gliss Wave.

FITTING

A. FITTING INFORMATION



For detailed fitting information, visit the [Silent Gliss website](#).

Fixing points



B. CEILING FITTING


Bracket SG 3603

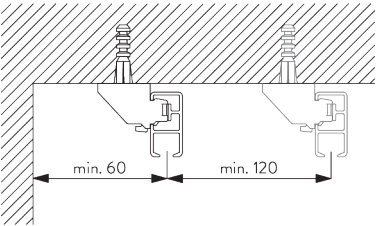


SG 3603
Bracket

C. WALL FITTING

Smart Fix




Smart Fix SG 11200 - SG 11205 and bracket SG 3603:
Screw SG 10492 (M4x8) needed.




Square Smart Fix SG 11210 - SG 11215 and bracket SG 3603:
Screw SG 10492 (M4x8) needed.

Smart Fix	X mm
SG 11200 / SG 11210	72
SG 11201 / SG 11211	92
SG 11202 / SG 11212	112
SG 11203 / SG 11213	132
SG 11204 / SG 11214	162
SG 11205 / SG 11215	212
SG 11154	122-150
SG 11155	152-180
SG 11156	202-230

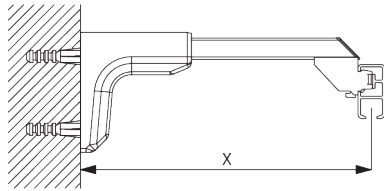

**Universal Smart Fix SG 11154 - SG 11156 and
bracket SG 3603:**

Screw SG 10277 (M4x12) needed.



SG 3603

Bracket




SG 10277

Pan head screw M4x12




SG 10492

Pan head screw M4x8




SG 11200

Smart Fix 60 mm




SG 11201

Smart Fix 80 mm




SG 11202

Smart Fix 100 mm




SG 11203

Smart Fix 120 mm




SG 11204

Smart Fix 150 mm




SG 11205

Smart Fix 200 mm




SG 11210

Square Smart Fix 60 mm




SG 11211

Square Smart Fix 80 mm




SG 11212

Square Smart Fix 100 mm




SG 11213

Square Smart Fix 120 mm




SG 11214

Square Smart Fix 150 mm




SG 11215

Square Smart Fix 200 mm




SG 11154

Universal Smart Fix 120 mm



SG 11155


Universal Smart Fix 150 mm




SG 11156

Universal Smart Fix 200 mm


Universal Brackets
SG 3630, SG 3655,
SG 3660




Bracket	X mm
SG 3630	35
SG 3655	50
SG 3660	65



SG 3630
Bracket 35 mm





SG 3655
Bracket 50 mm



SG 3660
Bracket 65 mm


SYSTEM OPTIONS

A. WAVE




SG 11295 SG 11302

- Standard components:
- SG 11295 End stop
 - SG 11302 Wave 2C glider cord 80 mm

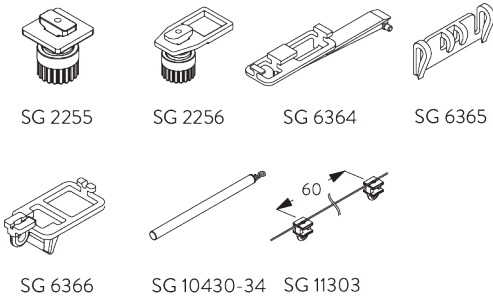

SG 6366 SG 10430-34 SG 11303



- Optional components (min. radius >25 cm):
- SG 2255 Brake
 - SG 2256 Brake
 - SG 6364 Wave extension
 - SG 6365 Wave hanger
 - SG 6366 Wave carrier for draw rod
 - SG 10430-34 Draw rod
 - SG 11303 Wave 2C glider cord 60 mm

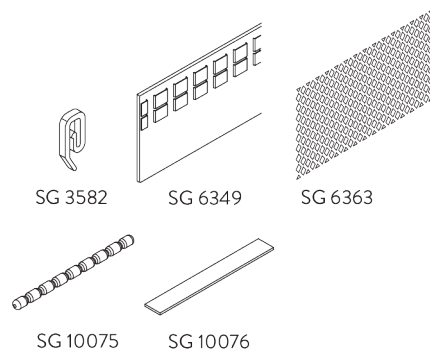

Curtain components:

- SG 3582 Hook
- SG 6349 Wave curtain tape
- SG 6363 Wave top hemming tape
- SG 10075 Lead weight 50 gr/m
- SG 10076 Fabric weight

Wave stack depth - 2C glider cord (standard components)

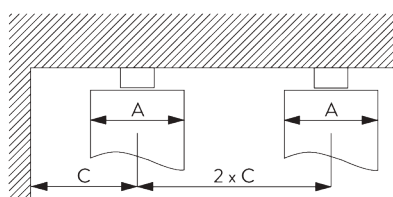






2C Glider cord SG 11302	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
80	6	~2.1	140	180 per metre of track	90
80	7	~2.3	160	180 per metre of track	100

2C Glider cord SG 11303	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
60	4	~2.1	100	230 per metre of track	70
60	5	~2.3	120	230 per metre of track	80














*Stack size B when using optional extension arm increases
by 150 mm per curtain stack!








PARTS

A. STANDARD PARTS



	SG 3599 Hook
	SG 3603 Bracket
	SG 6065 End stop
	SG 6086 Spring stop
	SG 6380p Profile
	SG 6381 End cover
	SG 11300 2C glider

B. OPTIONAL PARTS

	SG 2255 Brake		SG 6005 Hook
	SG 2256 Brake		SG 6053 Spring stop
	SG 3012 Hook		SG 6057 Glider
	SG 3555 Hook		SG 6082 Glider
	SG 3571 Hook		SG 6094 Roller
	SG 3581 Hook		SG 6098 Roller
	SG 3582 Hook		SG 6240 Roller
	SG 3598 Eyelet		SG 6283 Roller
	SG 3618 Wall bracket		SG 6349 Wave curtain tape
	SG 3620 Connection bridge		SG 6363 Wave top hemming tape
	SG 3630 Bracket 35 mm		SG 6364 Wave extension
	SG 3655 Bracket 50 mm		SG 6365 Wave hanger
	SG 3660 Bracket 65 mm		SG 6366 Wave carrier for draw rod
	SG 6004 Eyelet		SG 10075 Lead weight 50 g/m

	SG 10076 Fabric weight		SG 11203 Smart Fix 120 mm
	SG 10277 Pan head screw M4x12		SG 11204 Smart Fix 150 mm
	SG 10430 Draw rod 50 cm		SG 11205 Smart Fix 200 mm
	SG 10431 Draw rod 75 cm		SG 11210 Square Smart Fix 60 mm
	SG 10432 Draw rod 100 cm		SG 11211 Square Smart Fix 80 mm
	SG 10433 Draw rod 125 cm		SG 11212 Square Smart Fix 100 mm
	SG 10434 Draw rod 150 cm		SG 11213 Square Smart Fix 120 mm
	SG 10492 Pan head screw M4x8		SG 11214 Square Smart Fix 150 mm
	SG 11154 Universal Smart Fix 120 mm		SG 11215 Square Smart Fix 200 mm
	SG 11155 Universal Smart Fix 150 mm		SG 11295 End stop
	SG 11156 Universal Smart Fix 200 mm		SG 11301 2C glider on strip
	SG 11200 Smart Fix 60 mm		SG 11302 Wave 2C glider cord 80 mm
	SG 11201 Smart Fix 80 mm		SG 11303 Wave 2C glider cord 60 mm
	SG 11202 Smart Fix 100 mm		SG 11305 2C glider for direct sewing

SG 6465

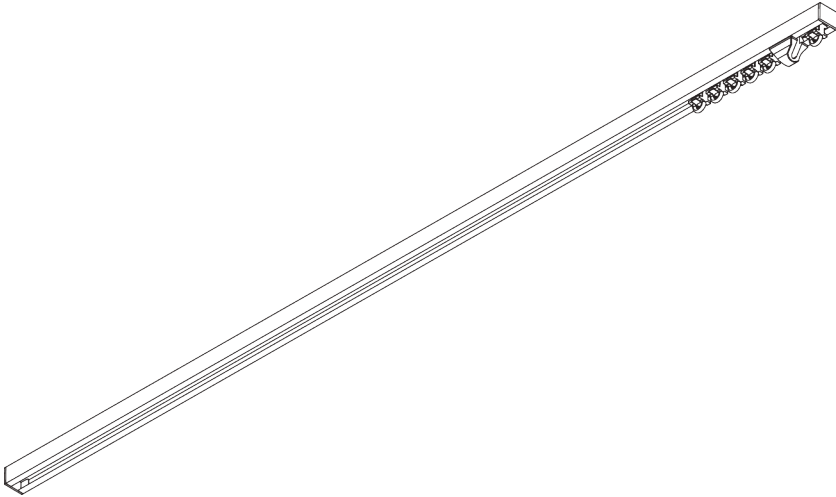

PRODUCT INFORMATION

- **Operation:** *hand*
- **Range:** *S - M*
- **Fitting:** *ceiling, recess*
- **Colours:** *white RAL 9016, black RAL 9005 or anodised aluminum, special colours possible (recess profile only in white RAL 9016, black RAL 9005 or special color)*
- **Fabrics:** *refer to Silent Gliss fabric collection*


Features:

- *2-component (2C) glider technology*
- *Wave (2C)*
- *Bendable*
- *Bendable recess profile*

SYSTEM SPECIFICATIONS

A. PROFILE


Profile and bending information



SG 6466

Profile

Radius:
✓ 8 cm, 12 cm, 16 cm,
>25 cm




SG 11231

Recess profile

Radius:
✓ >27 cm

B. HOW TO MEASURE

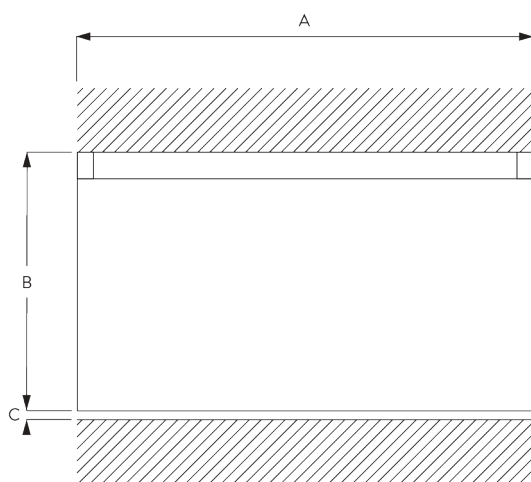

A: System width

B: System height

C: Distance between floor and fabric

C. SPECIFICATION TEXT

EN

Silent Gliss SG 6465 Hand Drawn Curtain Track System. Comprises aluminium profile SG 6466 supplied made to measure in silver anodised or white powder coated, alternatively a specified RAL colour. SG 11130 at 14/m, 2 end covers SG 6471 and 2 SG 6065 stops. Top fixed with brackets. Recess profile SG 11231 is optional. SG 3060 at max. 300 mm centres. Silent Gliss Wave option is available.

SV

Silent Gliss SG 6465 handdragssystem. Består av aluminiumprofil SG 6466 i specificerad längd i vitlack, alu natur eller angiven RAL färg.

14 st SG 11300 SILENT TRACK glid per meter, 2 st SG 6471 ändskydd samt 2 st SG 6065 vridstopp per system. Kan användas med system Wave. Kan också levereras med profil för infällning SG 11231. Takmonteras med fäste SG 3060 c/c 300 mm.

NO

Silent Gliss SG 6465 Manuell gardinskinne. Består av aluminiumprofil SG 6466 i spesifisert lengde, standard i hvitlakkert eller alu natur. Kan også leveres i spesifisert RAL farge. 14 stk SG 11300 SILENT TRACK glidere pr meter, 2 stk SG 6471 endeløkk og 2 stk SG 6065 fjær pr system. Takmonteres med feste SG 3060 c/c 300 mm. Kan leveres med profil for innfelling SG 11231.


DA

Silent Gliss SG 6465 håndtrukket gardinskinnesystem. Består af en aluminiumprofil SG 6466 i ønsket længde, sølvanodiseret eller hvid pulverlakering, alternativt en specificeret RAL-farve. 14 stk. SG 11130 glidere pr. m og 2 stk. SG 6471 endelåg samt 2 stk. SG 6065 endestop. Loftmonteres med beslag. Kan leveres med indfældningsprofil SG 11231. SG 3060 med højst 300 mm afstand. Kan bruges med Silent Gliss Wave.

FITTING



A. FITTING INFORMATION

Fixing points

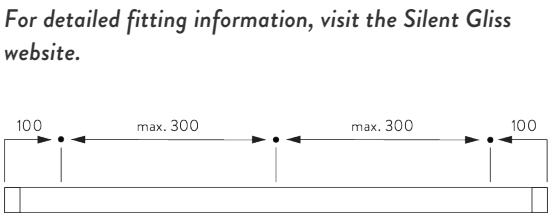

B. CEILING FITTING


Clamp SG 3060

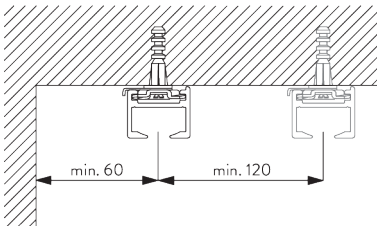


SG 3060
Clamp

C. RECESS FITTING


Recess profile SG 11231




One wedge SG 11237 per fixing point.
For detailed recess fitting, visit the [Silent Gliss website](#).



SG 11231
Recess profile




SG 11239
Recess Mask




SG 11237
Wedge

SYSTEM OPTIONS

A. WAVE



SG 11295



SG 11302

Standard components:


- SG 11295 End stop
- SG 11302 Wave 2C glider cord 80 mm



SG 2255



SG 2256




SG 6364



SG 6365

Optional components (min. radius >25 cm):


- SG 2255 Brake
- SG 2256 Brake
- SG 6364 Wave extension
- SG 6365 Wave hanger
- SG 6366 Wave carrier for draw rod
- SG 10430-34 Draw rod
- SG 11303 Wave 2C glider cord 60 mm



SG 6366




SG 10430-34




SG 11303



SG 3582




SG 6349



SG 6363

Curtain components:

- SG 3582 Hook
- SG 6349 Wave curtain tape
- SG 6363 Wave top hemming tape
- SG 10075 Lead weight 50 gr/m
- SG 10076 Fabric weight





SG 10075



SG 10076

Wave stack depth - 2C glider cord (standard components)

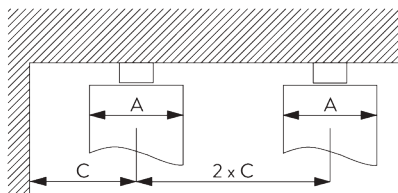

A = Stack depth
B = Stack size
C = Min. distance





2C Glider cord SG 11302	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
80	6	~2.1	140	180 per metre of track	90
80	7	~2.3	160	180 per metre of track	100

2C Glider cord SG 11303	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
60	4	~2.1	100	230 per metre of track	70
60	5	~2.3	120	230 per metre of track	80







**Stack size B when using optional extension arm increases
by 150 mm per curtain stack!*













PARTS


A. STANDARD PARTS

	SG 3060 Clamp
	SG 3599 Hook
	SG 6065 End stop
	SG 6245 Spring stop
	SG 6466 Profile
	SG 6471 End cover
	SG 11300 2C glider

B. OPTIONAL PARTS

	SG 2255 Brake
	SG 2256 Brake
	SG 3012 Hook
	SG 3062 Connection bridge
	SG 3582 Hook
	SG 3598 Eyelet
	SG 6057 Glider
	SG 6064 End stop
	SG 6082 Glider
	SG 6349 Wave curtain tape
	SG 6363 Wave top hemming tape
	SG 6364 Wave extension
	SG 6365 Wave hanger
	SG 6366 Wave carrier for draw rod


	SG 10075 Lead weight 50 g/m
	SG 10076 Fabric weight
	SG 10430 Draw rod 50 cm
	SG 10431 Draw rod 75 cm
	SG 10432 Draw rod 100 cm
	SG 10433 Draw rod 125 cm
	SG 10434 Draw rod 150 cm
	SG 11231 Recess profile
	SG 11237 Wedge
	SG 11239 Recess Mask
	SG 11295 End stop
	SG 11301 2C glider on strip
	SG 11302 Wave 2C glider cord 80 mm
	SG 11303 Wave 2C glider cord 60 mm



SG 11305

2C glider for direct sewing

SG 6475



PRODUCT INFORMATION

- **Operation:** hand
- **Range:** S - M
- **Fitting:** ceiling
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- 2-component (2C) glider technology
- Wave (2C)
- Bendable

SYSTEM SPECIFICATION

A. PROFILE

Profile and bending information




SG 6475p

Profile

Radius:
8 cm, 12 cm, 16 cm,
>25 cm

B. HOW TO MEASURE

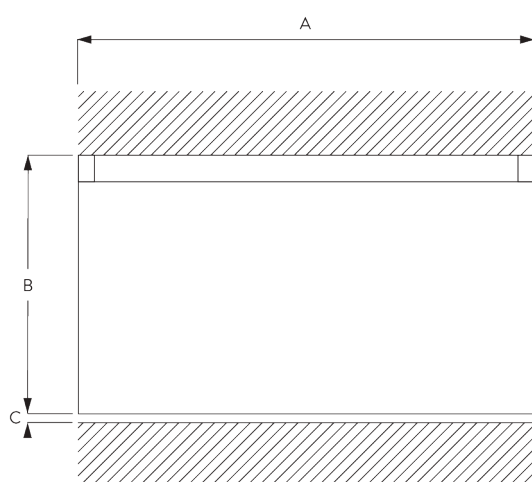

A: System width
B: System height
C: Distance between floor and fabric

C. SPECIFICATION TEXT

EN

Silent Gliss SG 6475 Hand Drawn Curtain Track System. Comprises aluminium profile SG 6475 supplied made to measure in silver anodised or white powder coated, alternatively a specified RAL colour. SG 1130 at 14/m, 2 end covers SG 6476 and 2 SG 6065 stops. Top fixed with brackets SG 3060 at max. 300 mm centres. Silent Gliss Wave option is available.

SV

Silent Gliss SG 6475 handdragssystem. Består av aluminiumprofil SG 6475 i specificerad längd i vitlack, alu natur eller angiven RAL färg. 14 st SG 11300 SILENT TRACK glid per meter, 2 st SG 6476 ändskydd samt 2 st SG 6065 vridstopp per system. Takmonteras med fäste SG 3060 c/c 300 mm. Kan användas med system Wave.

NO

Silent Gliss SG 6475 Manuell gardinskinne. Består av aluminiumprofil SG 6475 i spesifisert lengde, standard i hvitlakkert eller alu natur. Kan også leveres i spesifisert RAL farge. 14 stk SG 11300 SILENT TRACK glidere pr meter, 2 stk 6476 endeløkk og 2 stk SG 6065 vridstopp pr system. Takmonteres med feste SG 3060 c/c 300 mm. Kan kombineres med Wave system.

DA


Silent Gliss SG 6475 håndtrukket gardinskinnesystem. Består af en aluminiumprofil SG 6475 i ønsket længde, sølvanodiseret eller hvid pulverlakering, alternativt en specificeret RAL-farve. 14 stk. SG 1130 glidere pr. m og 2 stk. SG 6476 endelåg samt 2 stk. SG 6065 endestop. Loftmonteres med beslagene SG 3060 med højst 300 mm afstand. Kan bruges med Silent Gliss Wave.

FITTING

A. FITTING INFORMATION



For detailed fitting information, visit the *Silent Gliss* website.

Fixing points



B. CEILING FITTING



Clamp SG 3060

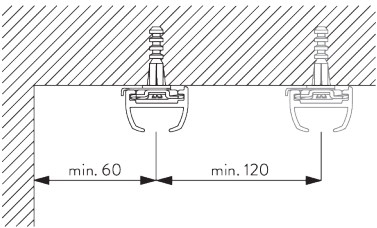

SG 3060
Clamp

SYSTEM OPTIONS


A. WAVE



SG 11295


SG 11302

- Standard components:
- SG 11295 End stop
 - SG 11302 Wave 2C glider cord 80 mm

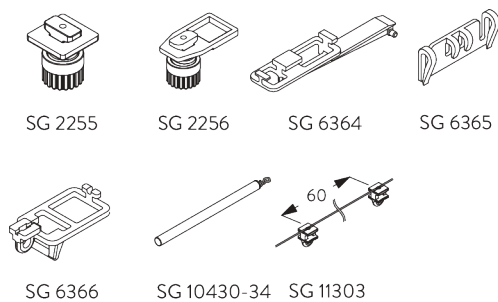

Optional components (min. radius >25 cm):



- SG 2255 Brake
- SG 2256 Brake
- SG 6364 Wave extension
- SG 6365 Wave hanger
- SG 6366 Wave carrier for draw rod
- SG 10430-34 Draw rod
- SG 11303 Wave 2C glider cord 60 mm

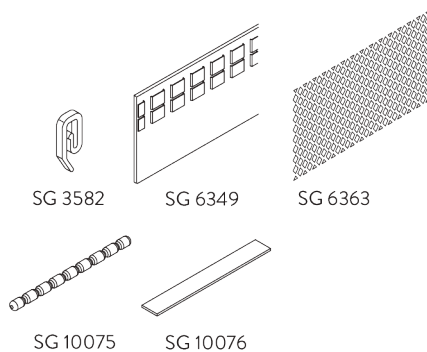

Curtain components:

- SG 3582 Hook
- SG 6349 Wave curtain tape
- SG 6363 Wave top hemming tape
- SG 10075 Lead weight 50 gr/m
- SG 10076 Fabric weight

Wave stack depth - 2C glider cord (standard components)

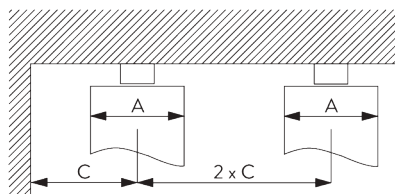

A = Stack depth
B = Stack size
C = Min. distance




2C Glider cord SG 11302	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
80	6	~2.1	140	180 per metre of track	90
80	7	~2.3	160	180 per metre of track	100

2C Glider cord SG 11303	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
60	4	~2.1	100	230 per metre of track	70
60	5	~2.3	120	230 per metre of track	80









*Stack size B when using optional extension arm increases
by 150 mm per curtain!









PARTS

A. STANDARD PARTS



	SG 3060 Clamp
	SG 3599 Hook
	SG 6065 End stop
	SG 6245 Spring stop
	SG 6475p Profile
	SG 6476 End cover
	SG 11300 2C glider

B. OPTIONAL PARTS

	SG 2255 Brake
	SG 2256 Brake
	SG 3012 Hook
	SG 3062 Connection bridge
	SG 3582 Hook
	SG 6057 Glider
	SG 6082 Glider
	SG 6349 Wave curtain tape
	SG 6363 Wave top hemming tape
	SG 6364 Wave extension
	SG 6365 Wave hanger
	SG 6366 Wave carrier for draw rod
	SG 10075 Lead weight 50 g/m
	SG 10076 Fabric weight

	SG 10430 Draw rod 50 cm
	SG 10431 Draw rod 75 cm
	SG 10432 Draw rod 100 cm
	SG 10433 Draw rod 125 cm
	SG 10434 Draw rod 150 cm
	SG 11295 End stop
	SG 11301 2C glider on strip
	SG 11302 Wave 2C glider cord 80 mm
	SG 11303 Wave 2C glider cord 60 mm
	SG 11305 2C glider for direct sewing

SG 6815

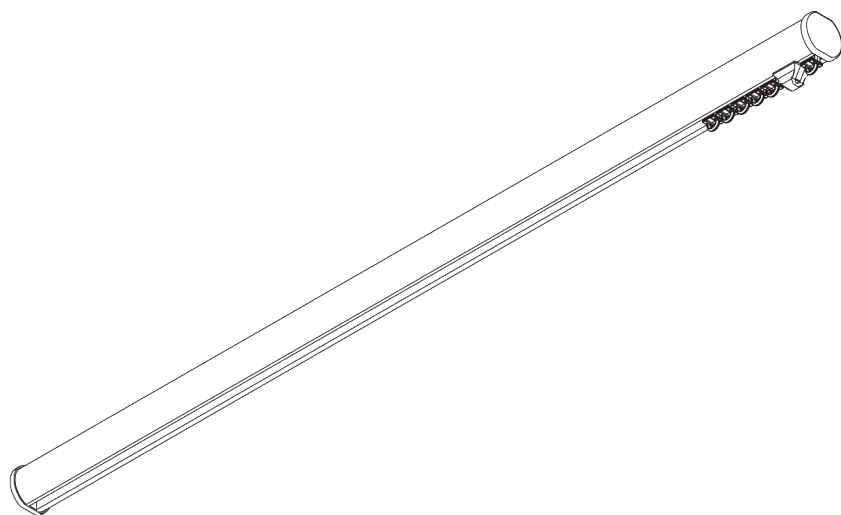

PRODUCT INFORMATION

- **Operation:** hand
- **Range:** S - M
- **Fitting:** ceiling, wall
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- 2-component (2C) glider technology
- Wave (2C)
- Bendable

SYSTEM SPECIFICATIONS

A. PROFILE

Profile and bending information




SG 6103p

Profile

 Radius: >25 cm

B. HOW TO MEASURE

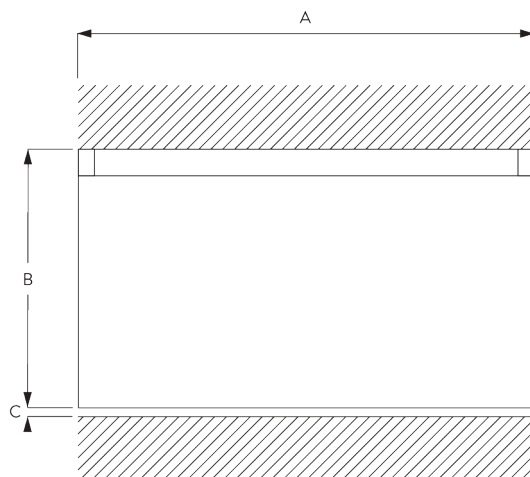

A: System width
B: System height
C: Distance between floor and fabric

C. SPECIFICATION TEXT

EN

Silent Gliss SG 6815 Hand Drawn Curtain Track System. Comprises aluminium profile SG 6103 supplied made to measure in silver anodised or white powder coated, alternatively a specified RAL colour. SG 11130 at 14/m, 2 end covers SG 6630 and 2 SG 6065 stops. Top fixed with brackets SG 6124/6175 at max. 800 mm centres / wall fix SG Smart Fix at max. 800 mm centres. Silent Gliss Wave option is available.

SV

Silent Gliss SG 6815 handdragssystem. Består av aluminiumprofil SG 6103 i specificerad längd i vitlack, alu natur eller angiven RAL färg. 14 st SG 11300 SILENT TRACK glid per meter, 2 st SG 6630 ändskydd samt 2 st SG 6065 vridstopp per system. Takmonteras med fäste SG 6124/6175 c/c 800 mm. Kan användas med system Wave.

NO

Silent Gliss SG 6815 Manuell gardinskinne. Består av aluminiumprofil SG 6103 i spesifisert lengde, standard i hvitlakkert eller alu natur. Kan også leveres i spesifisert RAL farge. 14 stk SG 11300 SILENT TRACK glidere pr meter, 2 stk 6630 endeløkk og 2 stk SG 6065 vristopp pr system. Takmonteres med fester SG 6124/ 6175 c/c 800 mm. Kan kombineres med Wave system.

DA


Silent Gliss SG 6815 håndtrukket gardinskinnesystem. Består af en aluminiumprofil SG 6103 i ønsket længde, sølvanodiseret eller hvid pulverlakering, alternativt en specificeret RAL-farve. 14 stk. SG 1130 glidere pr. m og 2 stk. SG 6630 endelåg samt 2 stk. SG 6065 endestop. Loftmonteres med beslagene SG 6124/6175 medhøjest 800 mm afstand. Vægmonteres med SG Smart Fix med højest 800 mm afstand. Kan bruges med Silent Gliss Wave.

FITTING


A. FITTING INFORMATION

For detailed fitting information, visit the [Silent Gliss website](#).


Fixing points




B. CEILING FITTING




Mini hanger SG 6175



Bracket SG 6124




SG 6175
Mini hanger



SG 6124
Bracket


C. WALL FITTING

Smart Fix




Smart Fix with slot SG 11206 - SG 11208:
Screw SG 10492 (M4x8) needed.

Smart Fix	X mm
SG 11206 / SG 11216	33-51
SG 11207 / SG 11217	53-71
SG 11208 / SG 11218	73-91
SG 11154	102-130
SG 11155	132-160
SG 11156	182-210




Square Smart Fix with slot SG 11216 - SG 11218:

Screw SG 10492 (M4x8) needed.

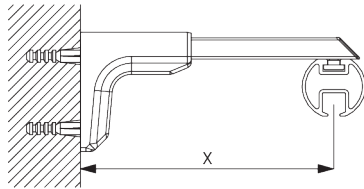

Universal Smart Fix SG 11154 - SG 11156:

Screw SG 11131 (M4x6) needed.



SG 6117

Slot nut




SG 10492

Pan head screw M4x8




SG 11131

Pan head screw with flange
M4x6




SG 11206

Smart Fix with slot 60 mm




SG 11207

Smart Fix with slot 80 mm




SG 11208

Smart Fix with slot 100 mm




SG 11216

Square Smart Fix with slot 60 mm




SG 11217

Square Smart Fix with slot 80 mm




SG 11218

Square Smart Fix with slot
100 mm




SG 11154

Universal Smart Fix 120 mm



SG 11155

Universal Smart Fix 150 mm




SG 11156


Universal Smart Fix 200 mm

SYSTEM OPTIONS

A. WAVE



SG 11295



SG 11302

Standard components:


- SG 11295 End stop
- SG 11302 Wave 2C glider cord 80 mm



SG 2255



SG 2256




SG 6364




SG 6365

Optional components:


- SG 2255 Brake
- SG 2256 Brake
- SG 6364 Wave extension
- SG 6365 Wave hanger
- SG 6366 Wave carrier for draw rod
- SG 10430-34 Draw rod
- SG 11303 Wave 2C glider cord 60 mm



SG 6366




SG 10430-34




SG 11303



SG 3582




SG 6349



SG 6363

Curtain components:

- SG 3582 Hook
- SG 6349 Wave curtain tape
- SG 6363 Wave top hemming tape
- SG 10075 Lead weight 50 gr/m
- SG 10076 Fabric weight





SG 10075



SG 10076

Wave stack depth - 2C glider cord (standard components)

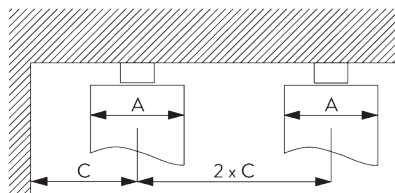

A = Stack depth
B = Stack size
C = Min. distance




2C Glider cord SG 11302	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
80	6	~2.1	140	180 per metre of track	90
80	7	~2.3	160	180 per metre of track	100

2C Glider cord SG 11303	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
60	4	~2.1	100	230 per metre of track	70
60	5	~2.3	120	230 per metre of track	80





*Stack size B when using optional extension arm increases
by 150 mm per curtain!










PARTS















A. STANDARD PARTS

	SG 3599 Hook
	SG 6065 End stop
	SG 6086 Spring stop
	SG 6103p Profile
	SG 6124 Bracket
	SG 6630 End cover
	SG 11300 2C glider



B. OPTIONAL PARTS

	SG 2255 Brake
	SG 2256 Brake
	SG 3012 Hook
	SG 3581 Hook
	SG 3582 Hook
	SG 3598 Eyelet
	SG 6004 Eyelet
	SG 6053 Spring stop
	SG 6057 Glider
	SG 6075 End stop with hook
	SG 6082 Glider
	SG 6094 Roller
	SG 6098 Roller
	SG 6117 Slot nut

	SG 6175 Mini hanger
	SG 6240 Roller
	SG 6283 Roller
	SG 6349 Wave curtain tape
	SG 6363 Wave top hemming tape
	SG 6364 Wave extension
	SG 6365 Wave hanger
	SG 6366 Wave carrier for draw rod
	SG 6635 Connection bridge set
	SG 10075 Lead weight 50 g/m
	SG 10076 Fabric weight
	SG 10430 Draw rod 50 cm
	SG 10431 Draw rod 75 cm
	SG 10432 Draw rod 100 cm

	SG 10433 Draw rod 125 cm		SG 11301 2C glider on strip
	SG 10434 Draw rod 150 cm		SG 11302 Wave 2C glider cord 80 mm
	SG 10492 Pan head screw M4x8		SG 11303 Wave 2C glider cord 60 mm
	SG 11131 Pan head screw with flange M4x6		SG 11305 2C glider for direct sewing
	SG 11154 Universal Smart Fix 120 mm		
	SG 11155 Universal Smart Fix 150 mm		
	SG 11156 Universal Smart Fix 200 mm		
	SG 11206 Smart Fix with slot 60 mm		
	SG 11207 Smart Fix with slot 80 mm		
	SG 11208 Smart Fix with slot 100 mm		
	SG 11216 Square Smart Fix with slot 60 mm		
	SG 11217 Square Smart Fix with slot 80 mm		
	SG 11218 Square Smart Fix with slot 100 mm		
	SG 11295 End stop		

SG 6820

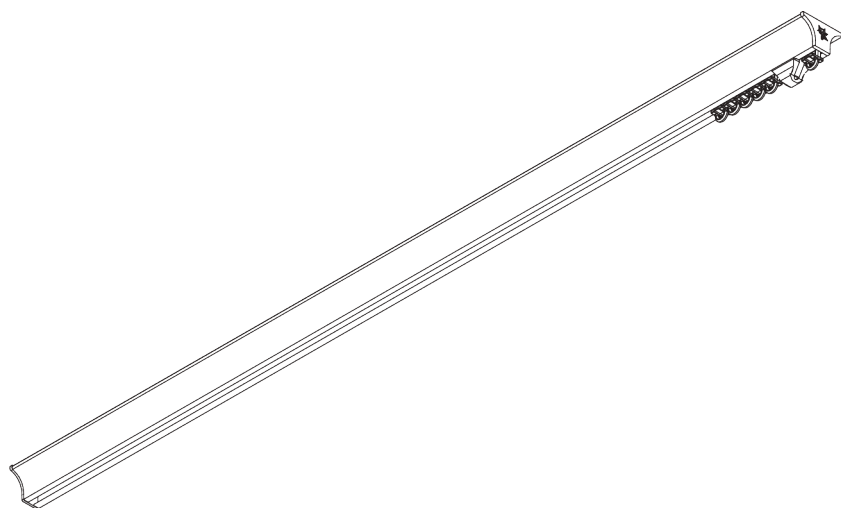

PRODUCT INFORMATION

- **Operation:** hand
- **Range:** S - M
- **Fitting:** ceiling
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection

Features:

- 2-component (2C) glider technology
- Wave (2C)
- Funnel shaped design
- Bendable

SYSTEM SPECIFICATIONS


A. SYSTEM DIMENSIONS



10 kg

B. PROFILE

Profile and bending
information




SG 6821

Profile Funnel



C. HOW TO MEASURE

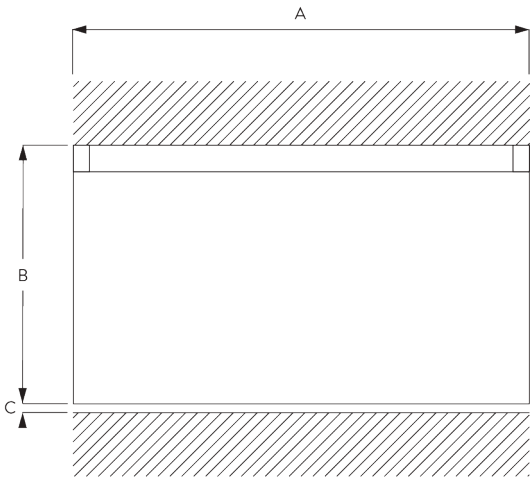

- A: System width
- B: System height
- C: Distance between floor and fabric

D. SPECIFICATION

TEXT

EN

Silent Gliss SG 6820 Hand Drawn Curtain Track System. Comprises aluminium profile SG 6821 supplied made to measure in silver anodised or white powder coated, alternatively a specified RAL colour. SG 11130 at 14/m, 2 end covers SG 6823 and 2 SG 6065 stops. Top fixed with brackets SG 11236 max. 500 mm centres. Silent Gliss Wave option is available.

SV

Silent Gliss SG 6820 handdragssystem. Består av aluminiumprofil SG 6821 i specificerad längd i vitlack, alu natur eller angiven RAL färg. 14 st SG 11300 SILENT TRACK glid per meter, 2 st SG 6823 ändskydd samt 2 st SG 6065 vridstopp per system. Takmonteras med fäste SG 11236 c/c 500 mm. Kan användas med system Wave.

NO

Silent Gliss SG 6820 Manuell gardinskinne. Består av aluminiumprofil SG 6821 i spesifisert lengde, standard i hvitlakkert eller alu natur. Kan også leveres i spesifisert RAL farge. 14 stk SG 11300 SILENT TRACK glidere pr meter, 2 stk 6823 endeløkk og 2 stk SG 6065 vristopp pr system. Takmonteres med feste SG 11236 c/c 500mm. Kan kombineres med Wave system.


DA

Silent Gliss SG 6820 håndtrukket gardinskinnesystem. Består af en aluminiumprofil SG 6821 i ønsket længde, sølvanodiseret eller hvid pulverlakering, alternativt en specificeret RAL-farve. 14 stk. SG 11130 glidere pr. m og 2 stk. SG 6823 endelåg samt 2 stk. SG 6065 endestop. Loftmonteres med beslagene SG 11236 med højst 500 mm afstand. Kan bruges med Silent Gliss Wave.


FITTING

A. FITTING INFORMATION

For detailed fitting information, visit the [Silent Gliss website](#).



Fitting Tool

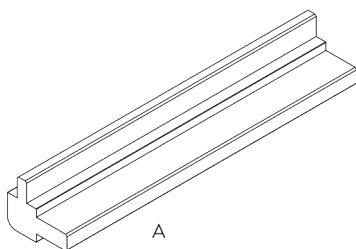



A: Funnel fitting tool SG 6827

For fitting / removing of the funnel profile.

B. CEILING FITTING

Clip SG 11236

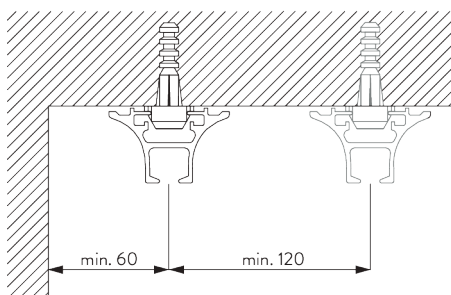




SG 11236


Clip

SYSTEM OPTIONS

A. WAVE



SG 11295



SG 11302

Standard components:


- SG 11295 End stop
- SG 11302 Wave 2C glider cord 80 mm



SG 2255



SG 2256




SG 6364




SG 6365

Optional components:


- SG 2255 Brake
- SG 2256 Brake
- SG 6364 Wave extension
- SG 6365 Wave hanger
- SG 6366 Wave carrier for draw rod
- SG 10430-34 Draw rod
- SG 11303 Wave 2C glider cord 60 mm



SG 6366




SG 10430-34




SG 11303



SG 3582




SG 6349



SG 6363

Curtain components:

- SG 3582 Hook
- SG 6349 Wave curtain tape
- SG 6363 Wave top hemming tape
- SG 10075 Lead weight 50 gr/m
- SG 10076 Fabric weight




SG 10075



SG 10076

Wave stack depth - 2C glider cord (standard components)

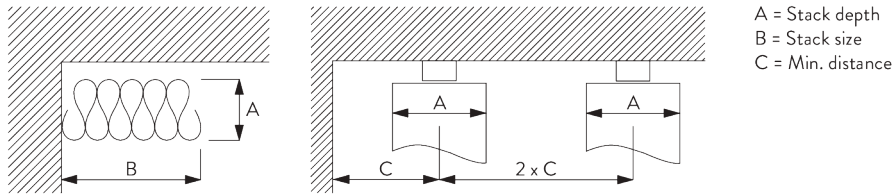


2C Glider cord SG 11302	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
80	6	~2.1	140	180 per metre of track	90
80	7	~2.3	160	180 per metre of track	100

2C Glider cord SG 11303	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
60	4	~2.1	100	230 per metre of track	70
60	5	~2.3	120	230 per metre of track	80







**Stack size B when using optional extension arm increases
by 150 mm per curtain stack!*












PARTS


A. STANDARD PARTS

	SG 3599 Hook
	SG 6065 End stop
	SG 6086 Spring stop
	SG 6821 Profile Funnel
	SG 6823 End cover
	SG 11236 Clip
	SG 11300 2C glider

B. OPTIONAL PARTS

	SG 2255 Brake
	SG 2256 Brake
	SG 3012 Hook
	SG 3582 Hook
	SG 3598 Eyelet
	SG 3802 Connection bridge
	SG 6004 Eyelet
	SG 6005 Hook
	SG 6053 Spring stop
	SG 6057 Glider
	SG 6082 Glider
	SG 6094 Roller
	SG 6098 Roller
	SG 6146 Hook

	SG 6240 Roller
	SG 6283 Roller
	SG 6349 Wave curtain tape
	SG 6363 Wave top hemming tape
	SG 6364 Wave extension
	SG 6365 Wave hanger
	SG 6366 Wave carrier for draw rod
	SG 10075 Lead weight 50 g/m
	SG 10076 Fabric weight
	SG 10430 Draw rod 50 cm
	SG 10431 Draw rod 75 cm
	SG 10432 Draw rod 100 cm
	SG 10433 Draw rod 125 cm
	SG 10434 Draw rod 150 cm



SG 11295
End stop




SG 11301
2C glider on strip



SG 11302
Wave 2C glider cord 80 mm





SG 11303
Wave 2C glider cord 60 mm



SG 11305
2C glider for direct sewing

SG 6840

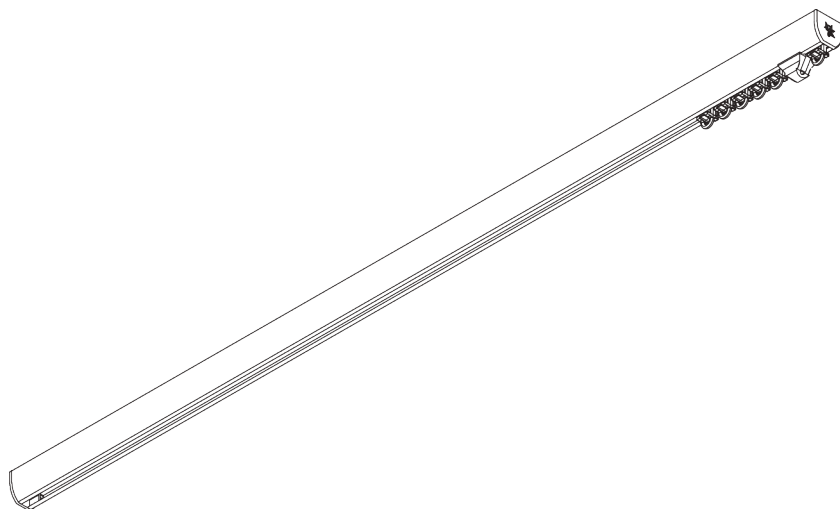

PRODUCT INFORMATION

- **Operation:** hand
- **Range:** M - L
- **Fitting:** ceiling, wall
- **Colours:** white RAL 9016, black RAL 9005 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- 2-component (2C) glider technology
- Wave (2C)
- Bendable

SYSTEM SPECIFICATIONS

A. PROFILE

Profile and bending information




SG 3841

Profile

Radius:
20 cm, >30 cm

B. HOW TO MEASURE

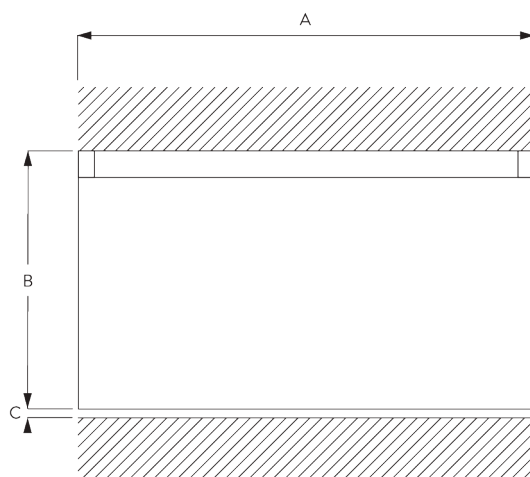

A: System width

B: System height

C: Distance between floor and fabric

C. SPECIFICATION TEXT

EN

Silent Gliss SG 6840 Hand Drawn Curtain Track System. Comprises aluminium profile SG 3841 supplied made to measure in silver anodised or white powder coated, alternatively a specified RAL colour. SG 11130 at 14/m, 2 end covers SG 3842 and 2 SG 6065 stops. Top fixed with brackets SG 3825/3826/3832 max. 500 mm centres. Wall fix SG Smart Fix at max. 500mm centres. Silent Gliss Wave option is available.

SV

Silent Gliss SG 6840 handdragssystem. Består av aluminiumprofil SG 3841 i specificerad längd i vitlack, alu natur eller angiven RAL färg. 14 st SG 11300 SILENT TRACK glid per meter, 2 st SG 3842 ändskydd samt 2 st SG 6065 vridstopp per system. Takmonteras med fäste SG 3825/3826/3832 c/c 500 mm. Vägghmontering med SG Smart Fix c/c 500 mm. Kan användas med system Wave.

NO

Silent Gliss SG 6820 Manuell gardinskinne. Består av aluminiumprofil SG 3841 i spesifisert lengde, standard i hvitlakkert eller alu natur. Kan også leveres i spesifisert RAL farge. 14 stk SG 11300 SILENT TRACK glidere pr meter, 2 stk 3842 endelokk og 2 stk SG 6065 vridstopp pr system. Takmonteres med fester SG 3825/3826/3832 c/c 500 mm. Veggmontering med SG Smart Fix c/c 500 mm. Kan kombineres med Wave system.


DA

Silent Gliss SG 6840 håndtrukket gardinskinnesystem. Består af en aluminiumprofil SG 3841 i ønsket længde, sølvanodiseret eller hvid pulverlakering, alternativt en specificeret RAL-farve. 14 stk. SG 11130 glidere pr. m og 2 stk. SG 3842 endelåg samt 2 stk. SG 6065 endestop. Loftmonteres med beslagene SG 3825/3826/3832 med højst 500 mm afstand. Vægmonteres med SG Smart Fix med en afstand på højst 500 mm. Kan bruges med Silent Gliss Wave.

FITTING



A. FITTING INFORMATION

For detailed fitting information, visit the *Silent Gliss* website.





B. CEILING FITTING

Clamp SG 3825

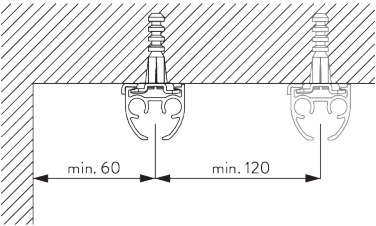


SG 3825
Clamp


Bracket SG 3826

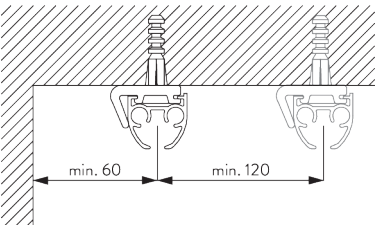

SG 3826
Bracket

Bracket SG 3832

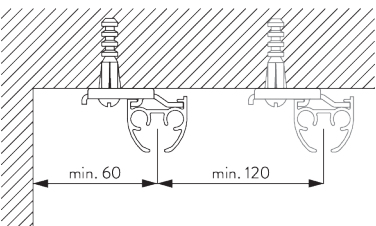




SG 3832


Bracket

C. WALL FITTING


Smart Fix




Smart Fix SG 11200 - SG 11205 and bracket SG 3826:
Screw SG 10492 (M4x8) needed.



Square Smart Fix SG 11210 - SG 11215 and bracket SG 3826:
Screw SG 10492 (M4x8) needed.

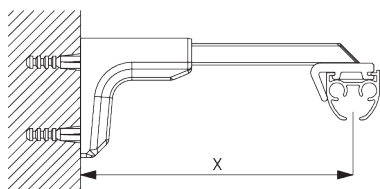


Universal Smart Fix SG 11154 - SG 11156 and bracket SG 3826:
Screw SG 10277 (M4x12) needed.




Smart Fix SG 11200 - SG 11205 and bracket SG 3832:
Screw SG 10492 (M4x8) needed.

Smart Fix	X mm (SG 3826 / SG 3825)	X mm (SG 3832)
SG 11200 / SG 11210	52	70
SG 11201 / SG 11211	72	90
SG 11202 / SG 11212	92	110
SG 11203 / SG 11213	112	130
SG 11204 / SG 11214	142	160
SG 11205 / SG 11215	192	210
SG 11154	102-130	120-148
SG 11155	132-160	150-178
SG 11156	182-210	200-228




Square Smart Fix SG 11210 - SG 11215 and bracket SG 3832:

Screw SG 10492 (M4x8) needed.

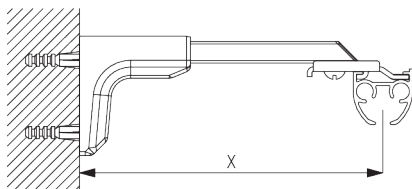


Universal Smart Fix SG 11154 - SG 11156 and bracket SG 3832:

Screw SG 10407 (M4x10) needed.




Smart Fix SG 11200 - SG 11205 and clamp SG 3825:

Screw SG 10074 (M4x8) needed.




Square Smart Fix SG 11210 - SG 11215 and clamp SG 3825:

Screw SG 10074 (M4x8) needed.

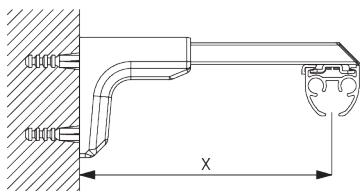


Universal Smart Fix SG 11154 - SG 11156 and bracket SG 3825:

Screw SG 11158 (M4x12) needed.




SG 3825

Clamp



SG 3826

Bracket



SG 3832

Bracket



SG 10074

Countersunk head screw
M4x8



SG 10277
Pan head screw M4x12




SG 10407
Pan head screw M4x10




SG 10492
Pan head screw M4x8




SG 11158
Countersunk head screw
M4x12




SG 11200
Smart Fix 60 mm




SG 11201
Smart Fix 80 mm




SG 11202
Smart Fix 100 mm




SG 11203
Smart Fix 120 mm




SG 11204
Smart Fix 150 mm




SG 11205
Smart Fix 200 mm




SG 11210
Square Smart Fix 60 mm




SG 11211
Square Smart Fix 80 mm




SG 11212
Square Smart Fix 100 mm




SG 11213
Square Smart Fix 120 mm




SG 11214
Square Smart Fix 150 mm




SG 11215
Square Smart Fix 200 mm



SG 11154
Universal Smart Fix 120 mm





SG 11155
Universal Smart Fix 150 mm



SG 11156
Universal Smart Fix 200 mm

Bracket SG 3836

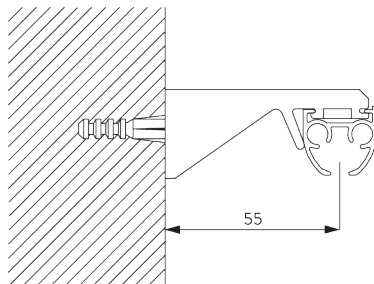




SG 3836


Bracket

SYSTEM OPTIONS

A. WAVE



SG 11295



SG 11302

Standard components:


- SG 11295 End stop
- SG 11302 Wave 2C glider cord 80 mm



SG 2255



SG 2256




SG 6364




SG 6365

Optional components (min. radius: >30 cm):


- SG 2255 Brake
- SG 2256 Brake
- SG 6364 Wave extension
- SG 6365 Wave hanger
- SG 6366 Wave carrier for draw rod
- SG 10430-34 Draw rod
- SG 11303 Wave 2C glider cord 60 mm



SG 6366




SG 10430-34




SG 11303



SG 3582




SG 6349



SG 6363

Curtain components:

- SG 3582 Hook
- SG 6349 Wave curtain tape
- SG 6363 Wave top hemming tape
- SG 10075 Lead weight 50 gr/m
- SG 10076 Fabric weight





SG 10075



SG 10076

Wave stack depth - 2C glider cord (standard components)

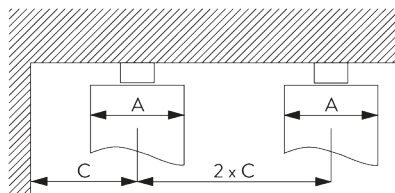

A = Stack depth
B = Stack size
C = Min. distance


2C Glider cord SG 11302	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
80	6	~2.1	140	180 per metre of track	90
80	7	~2.3	160	180 per metre of track	100

2C Glider cord SG 11303	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
60	4	~2.1	100	230 per metre of track	70
60	5	~2.3	120	230 per metre of track	80
















*Stack size B when using optional extension arm increases
by 150 mm per curtain stack!



















PARTS

A. STANDARD PARTS



	SG 3599 Hook
	SG 3825 Clamp
	SG 3841 Profile
	SG 3842 End cover
	SG 6065 End stop
	SG 6086 Spring stop
	SG 11300 2C glider

B. OPTIONAL PARTS

	SG 2255 Brake		SG 6064 End stop
	SG 2256 Brake		SG 6082 Glider
	SG 3012 Hook		SG 6094 Roller
	SG 3581 Hook		SG 6098 Roller
	SG 3582 Hook		SG 6099 Wave roller cord 80 mm
	SG 3598 Eyelet		SG 6240 Roller
	SG 3802 Connection bridge		SG 6283 Roller
	SG 3826 Bracket		SG 6349 Wave curtain tape
	SG 3832 Bracket		SG 6363 Wave top hemming tape
	SG 3836 Bracket		SG 6364 Wave extension
	SG 6004 Eyelet		SG 6365 Wave hanger
	SG 6005 Hook		SG 6366 Wave carrier for draw rod
	SG 6053 Spring stop		SG 10074 Countersunk head screw M4x8
	SG 6057 Glider		SG 10075 Lead weight 50 g/m

	SG 10076 Fabric weight		SG 11201 Smart Fix 80 mm		SG 11303 Wave 2C glider cord 60 mm
	SG 10277 Pan head screw M4x12		SG 11202 Smart Fix 100 mm		SG 11305 2C glider for direct sewing
	SG 10407 Pan head screw M4x10		SG 11203 Smart Fix 120 mm		
	SG 10430 Draw rod 50 cm		SG 11204 Smart Fix 150 mm		
	SG 10431 Draw rod 75 cm		SG 11205 Smart Fix 200 mm		
	SG 10432 Draw rod 100 cm		SG 11210 Square Smart Fix 60 mm		
	SG 10433 Draw rod 125 cm		SG 11211 Square Smart Fix 80 mm		
	SG 10434 Draw rod 150 cm		SG 11212 Square Smart Fix 100 mm		
	SG 10492 Pan head screw M4x8		SG 11213 Square Smart Fix 120 mm		
	SG 11154 Universal Smart Fix 120 mm		SG 11214 Square Smart Fix 150 mm		
	SG 11155 Universal Smart Fix 150 mm		SG 11215 Square Smart Fix 200 mm		
	SG 11156 Universal Smart Fix 200 mm		SG 11295 End stop		
	SG 11158 Countersunk head screw M4x12		SG 11301 2C glider on strip		
	SG 11200 Smart Fix 60 mm		SG 11302 Wave 2C glider cord 80 mm		

SG 6870

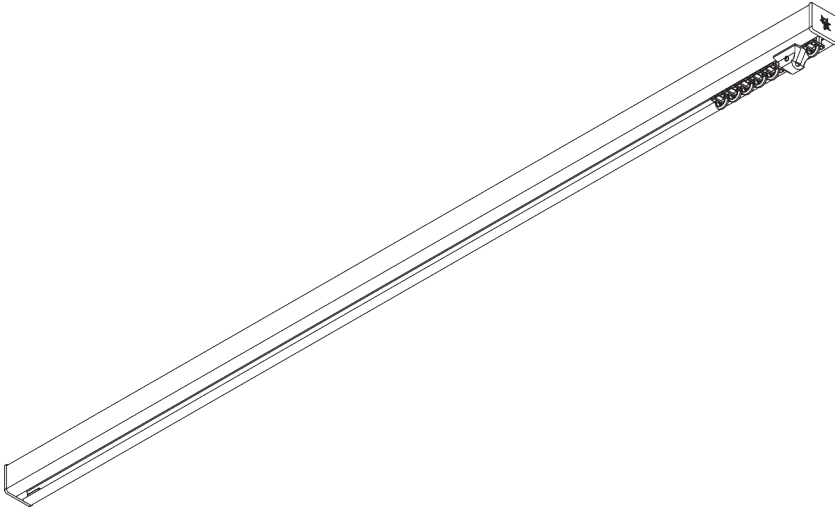

PRODUCT INFORMATION

- **Operation:** hand
- **Range:** M - L
- **Fitting:** ceiling, wall, recess
- **Colours:** white RAL 9016, black RAL 9005 or anodised aluminum, special colours possible (recess profile only in white RAL 9016, black RAL 9005 or special color)
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- 2-component (2C) glider technology
- Wave (2C)
- Bendable
- Bendable recess profile

SYSTEM SPECIFICATIONS

A. PROFILE


Profile and bending information



SG 11190

Profile

Radius:
✓ >26 cm




SG 11230

Recess profile

Radius:
✓ 50 - 75 cm
>75 cm on request

B. HOW TO MEASURE

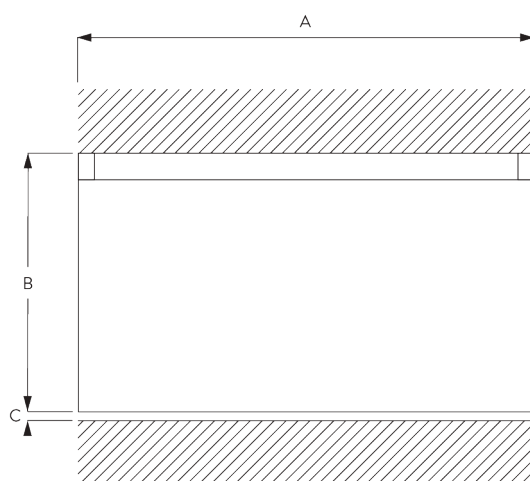

A: System width
B: System height
C: Distance between floor and fabric

C. SPECIFICATION

TEXT

EN

Silent Gliss SG 6870 Hand Drawn Curtain Track System. Comprises aluminium profile SG 11190 supplied made to measure in silver anodised or white powder coated, alternatively a specified RAL colour. SG 11130 at 14/m, 2 end covers SG 11233 and 2 SG 6065 stops. Top fixed with brackets SG 3825/3826/3832 max. 500 mm centres. Wall fix SG Smart Fix at max. 500mm centres. Silent Gliss Wave option is available. Optional recess profile SG 11230.

SV

Silent Gliss SG 6870 handdragssystem. Består av aluminiumprofil SG 11190 i specificerad längd i vitlack, alu natur eller angiven RAL färg. Kan användas med system Wave. 14 st SG 11300 SILENT TRACK glid per meter, 2 st SG 11233 ändskydd samt 2 st SG 6065 vridstopp per system. Takmonteras med fäste SG 3825/3826/3832 c/c 500 mm. Veggmontering med SG Smart Fix c/c 500 mm. Kan kombineras med Wave. Kan levereras med infällningsprofil SG 11230.

NO

Silent Gliss SG 6870 Manuell gardinskinne. Består av aluminiumprofil SG 11190 i spesifisert lengde, standard i hvitlakkert eller alu natur. Kan også leveres i spesifisert RAL farge. 14 stk SG 11300 SILENT TRACK glidere pr meter, 2 stk 11233 endelokk og 2 stk SG 6065 vridstopp pr system. Takmonteres med feste SG 3825/3826/3832 c/c 500mm. Veggmontering med SG Smart Fix c/c 500 mm. Kan kombineres med Wave system. Kan leveres med profil for innfelling SG 11230.

DA


Silent Gliss SG 6870 håndtrukket gardinskinnesystem. Består af en aluminiumprofil SG 11190 i ønsket længde, sølvanodiseret eller hvid pulverlakering, alternativt en specificeret RAL-farve. 14 stk. SG 11130 glidere pr. m og 2 stk. SG 11233 endelåg samt 2 stk. SG 6065 endestop. Loftmonteres med beslagene SG 3825/3826/3832 med højst 500 mm afstand. Vægmonteres med SG Smart Fix med en afstand på højst 500 mm. Kan bruges med Silent Gliss Wave. Kan leveres med indfældningsprofil SG 11230.

FITTING

A. FITTING INFORMATION



For detailed fitting information, visit the *Silent Gliss* website.

Fixing points





B. CEILING FITTING

Clamp SG 3825

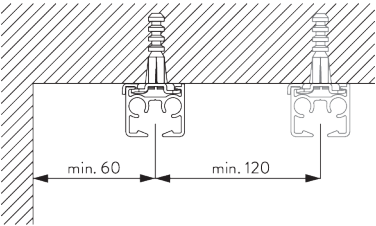


SG 3825
Clamp


Bracket SG 3826

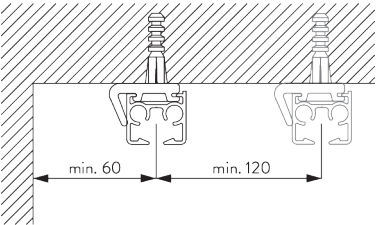

SG 3826
Bracket

Bracket SG 3832

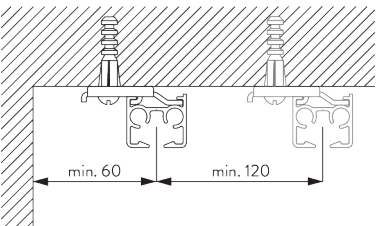




SG 3832

Bracket


C. WALL FITTING

Smart Fix




Smart Fix SG 11200 - SG 11205 and bracket SG 3826:

Screw SG 10492 (M4x8) needed.




Square Smart Fix SG 11210 - SG 11215 and bracket SG 3826:

Screw SG 10492 (M4x8) needed.

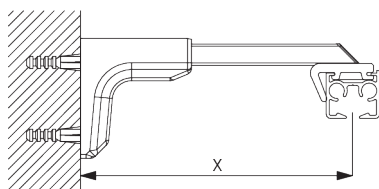

Universal Smart Fix SG 11154 - SG 11156 and bracket SG 3826:


Screw SG 10277 (M4x12) needed.



Smart Fix SG 11200 - SG 11205 and bracket SG 3832:


Screw SG 10492 (M4x8) needed.

Smart Fix	X mm (SG 3826 / SG 3825)	X mm (SG 3832)
SG 11200 / SG 11210	52	70
SG 11201 / SG 11211	72	90
SG 11202 / SG 11212	92	110
SG 11203 / SG 11213	112	130
SG 11204 / SG 11214	142	160
SG 11205 / SG 11215	192	210
SG 11154	102-130	120-148
SG 11155	132-160	150-178
SG 11156	182-210	200-228




Square Smart Fix SG 11210 - SG 11215 and bracket SG 3832:

Screw SG 10492 (M4x8) needed.

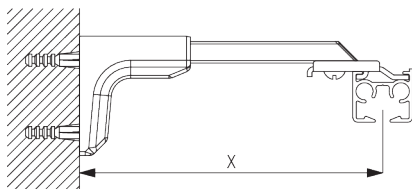


Universal Smart Fix SG 11154 - SG 11156 and bracket SG 3832:

Screw SG 10407 (M4x10) needed.




Smart Fix SG 11200 - SG 11205 and clamp SG 3825:

Screw SG 10074 (M4x8) needed.




Square Smart Fix SG 11210 - SG 11215 and clamp SG 3825:

Screw SG 10074 (M4x8) needed.

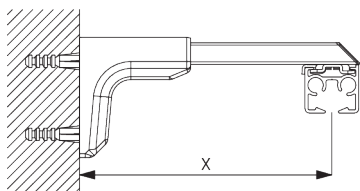


Universal Smart Fix SG 11154 - SG 11156 and bracket SG 3825:


Screw SG 11158 (M4x12) needed.



SG 3825
Clamp



SG 3826
Bracket



SG 3832
Bracket



SG 10074
Countersunk head screw
M4x8



SG 10277

Pan head screw M4x12



SG 10407

Pan head screw M4x10




SG 10492

Pan head screw M4x8




SG 11158

Countersunk head screw
M4x12




SG 11200

Smart Fix 60 mm




SG 11201

Smart Fix 80 mm




SG 11202

Smart Fix 100 mm




SG 11203

Smart Fix 120 mm




SG 11204

Smart Fix 150 mm




SG 11205

Smart Fix 200 mm




SG 11210

Square Smart Fix 60 mm




SG 11211

Square Smart Fix 80 mm




SG 11212

Square Smart Fix 100 mm




SG 11213

Square Smart Fix 120 mm




SG 11214

Square Smart Fix 150 mm




SG 11215

Square Smart Fix 200 mm




SG 11154

Universal Smart Fix 120 mm



SG 11155


Universal Smart Fix 150 mm




SG 11156

Universal Smart Fix 200 mm

Bracket SG 3836

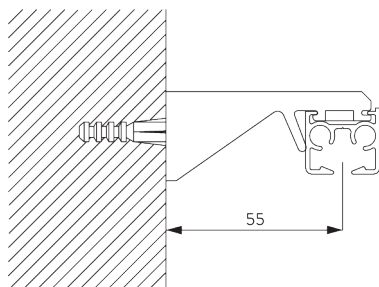




SG 3836


Bracket

D. RECESS FITTING

Recess profile SG 11230




*One wedge SG 10157 per fixing point.
For detailed recess fitting, visit the Silent Gliss website.*




SG 11230

Recess profile



SG 11238

Recess Mask




SG 10157


Wedge

SYSTEM OPTIONS

A. WAVE




SG 11295



SG 11302


Standard components:

- SG 11295 End stop
- SG 11302 Wave 2C glider cord 80 mm

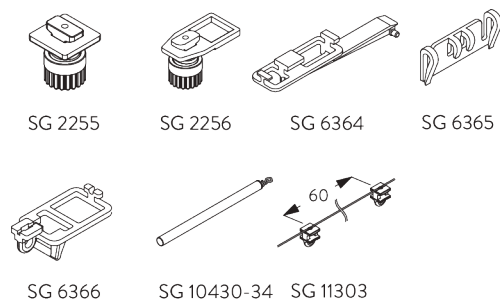

Optional components:


- SG 2255 Brake
- SG 2256 Brake
- SG 6364 Wave extension
- SG 6365 Wave hanger
- SG 6366 Wave carrier for draw rod
- SG 10430-34 Draw rod
- SG 11303 Wave 2C glider cord 60 mm

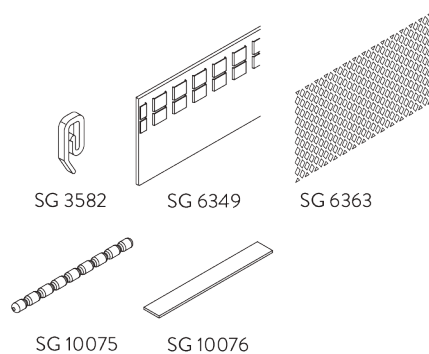

Curtain components:

- SG 3582 Hook
- SG 6349 Wave curtain tape
- SG 6363 Wave top hemming tape
- SG 10075 Lead weight 50 gr/m
- SG 10076 Fabric weight

Wave stack depth - 2C glider cord (standard components)

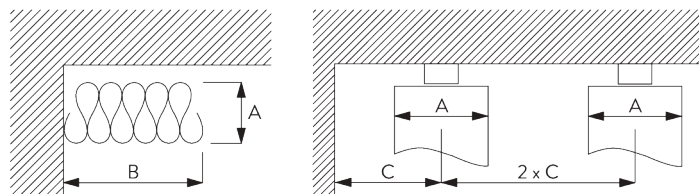

A = Stack depth
B = Stack size
C = Min. distance


2C Glider cord SG 11302	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
80	6	~2.1	140	180 per metre of track	90
80	7	~2.3	160	180 per metre of track	100

2C Glider cord SG 11303	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
60	4	~2.1	100	230 per metre of track	70
60	5	~2.3	120	230 per metre of track	80












*Stack size B when using optional extension arm increases
by 150 mm per curtain stack!
































PARTS

A. STANDARD PARTS



	SG 3599 Hook
	SG 3825 Clamp
	SG 6065 End stop
	SG 6086 Spring stop
	SG 11190 Profile
	SG 11233 End cover
	SG 11300 2C glider

B. OPTIONAL PARTS

	SG 2255 Brake		SG 6057 Glider
	SG 2256 Brake		SG 6064 End stop
	SG 3012 Hook		SG 6082 Glider
	SG 3555 Hook		SG 6094 Roller
	SG 3581 Hook		SG 6098 Roller
	SG 3582 Hook		SG 6099 Wave roller cord 80 mm
	SG 3598 Eyelet		SG 6146 Hook
	SG 3802 Connection bridge		SG 6240 Roller
	SG 3826 Bracket		SG 6283 Roller
	SG 3832 Bracket		SG 6349 Wave curtain tape
	SG 3836 Bracket		SG 6363 Wave top hemming tape
	SG 6004 Eyelet		SG 6364 Wave extension
	SG 6005 Hook		SG 6365 Wave hanger
	SG 6053 Spring stop		SG 6366 Wave carrier for draw rod

	SG 10074 Countersunk head screw M4x8		SG 11156 Universal Smart Fix 200 mm		SG 11230 Recess profile
	SG 10075 Lead weight 50 g/m		SG 11158 Countersunk head screw M4x12		SG 11238 Recess Mask
	SG 10076 Fabric weight		SG 11200 Smart Fix 60 mm		SG 11295 End stop
	SG 10157 Wedge		SG 11201 Smart Fix 80 mm		SG 11301 2C glider on strip
	SG 10277 Pan head screw M4x12		SG 11202 Smart Fix 100 mm		SG 11302 Wave 2C glider cord 80 mm
	SG 10407 Pan head screw M4x10		SG 11203 Smart Fix 120 mm		SG 11303 Wave 2C glider cord 60 mm
	SG 10430 Draw rod 50 cm		SG 11204 Smart Fix 150 mm		SG 11305 2C glider for direct sewing
	SG 10431 Draw rod 75 cm		SG 11205 Smart Fix 200 mm		
	SG 10432 Draw rod 100 cm		SG 11210 Square Smart Fix 60 mm		
	SG 10433 Draw rod 125 cm		SG 11211 Square Smart Fix 80 mm		
	SG 10434 Draw rod 150 cm		SG 11212 Square Smart Fix 100 mm		
	SG 10492 Pan head screw M4x8		SG 11213 Square Smart Fix 120 mm		
	SG 11154 Universal Smart Fix 120 mm		SG 11214 Square Smart Fix 150 mm		
	SG 11155 Universal Smart Fix 150 mm		SG 11215 Square Smart Fix 200 mm		

SG 6970

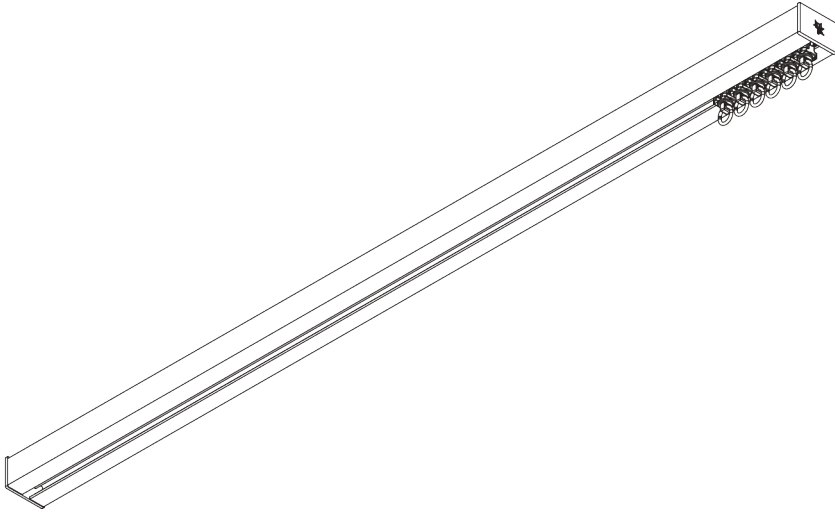

PRODUCT INFORMATION

- **Operation:** hand
- **Range:** M - L
- **Fitting:** ceiling, wall, recess
- **Colours:** white RAL 9016, black RAL 9005 or anodised aluminum, special colours possible (recess profile only in white RAL 9016, black RAL 9005 or special color)
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- 2-component (2C) roller technology
- Wave (2C)
- Bendable
- Bendable recess profile

SYSTEM SPECIFICATIONS


A. PROFILE

Profile and bending information



SG 10850

Profile




SG 10862

Recess profile



B. HOW TO MEASURE

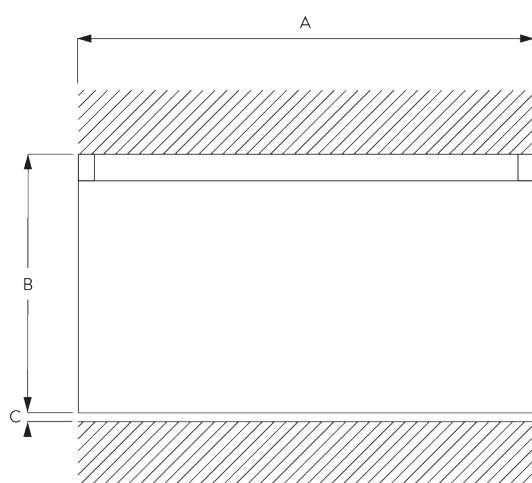

A: System width
B: System height
C: Distance between floor and fabric

C. SPECIFICATION TEXT

EN

Silent Gliss SG 6970 Hand Drawn Curtain Track System. Comprises aluminium profile SG 10850 supplied made to measure in silver anodised or white powder coated, alternatively a specified RAL colour. SG 10840 at 10/m, 2 end covers SG 11235. Top fixed with brackets SG 3004/3041 max. 500 mm centres. Wall fix SG Smart Fix at max. 500 mm centres. Optional recess profile SG 10862. Silent Gliss Wave option is available.

SV

Silent Gliss SG 6970 handdragssystem. Består av aluminiumprofil SG 10850 i specificerad längd i vitlack, alu natur eller angiven RAL färg. 10 st SG 10840 glid per meter, 2 st SG 11235 ändskydd per system. Takmonteras med fäste SG 3004/3041 c/c 500 mm. Vägghäggmontering med SG Smart Fix c/c 500 mm. Kan levereras med infällningsprofil SG 10862. Kan användas med system Wave.

NO

Silent Gliss SG 6970 Manuell gardinskinne. Består av aluminiumprofil SG 10850 i spesifisert lengde, standard i hvitlakkert eller alu natur. Kan også leveres i spesifisert RAL farge. 10 stk SG 10840 glidere pr meter, 2 stk 11235 endeløkk pr system. Takmonteres med feste SG 3004/3041 c/c 500 mm. Veggmontering med SG Smartfix c/c 500 mm. Kan leveres med profil for innfelling SG 10862. Kan kombineres med Wave system.

DA


Silent Gliss SG 6970 håndtrukket gardinskinnesystem. Består af en aluminiumprofil SG 10850 i ønsket længde, sølvanodiseret eller hvid pulverlakering, alternativt en specificeret RAL-farve. 10 stk. SG 10840 pr. m og 2 stk. SG 11235 endelåg. Loftmonteres med beslagene SG 3004/3041 højst 500 mm afstand. Vægmonteres med SG Smart Fix med en afstand på højst 500 mm. Kan leveres med indfældningsprofil SG 10862. Kan bruges med Silent Gliss Wave.

FITTING

A. FITTING INFORMATION


For detailed fitting information, visit the *Silent Gliss* website.

Fixing points





B. CEILING FITTING

Clamp SG 3004

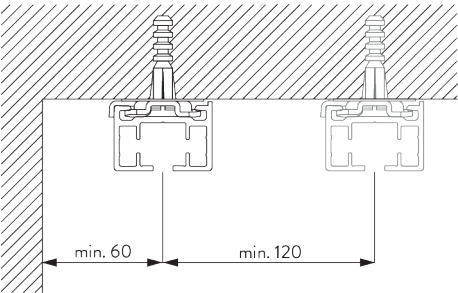


SG 3004
Clamp

Direct fitting

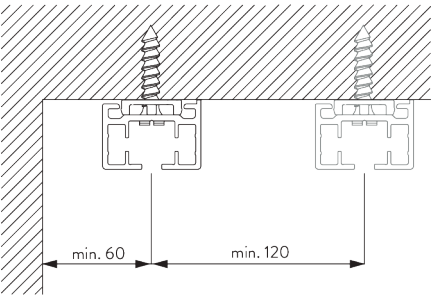


SG 7002
Profile protector



SG 10865
Support plate


Bracket SG 3041

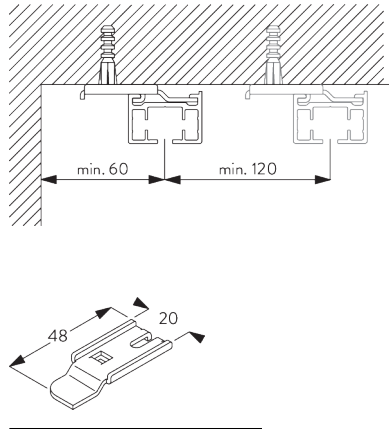


SG 3041
Bracket

C. WALL FITTING


Smart Fix

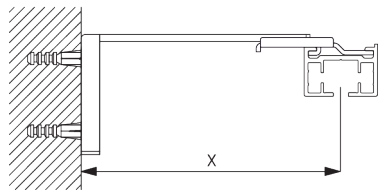


Smart Fix SG 11200 - SG 11205 and bracket SG 3041:
Screw SG 10492 (M4x8) needed.

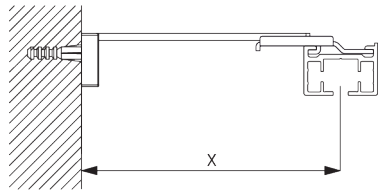

Square Smart Fix SG 11210 - SG 11215 and bracket SG 3041:
Screw SG 10492 (M4x8) needed.

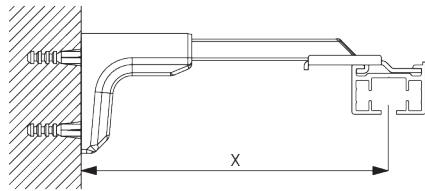


Universal Smart Fix SG 11154 - SG 11156 and bracket SG 3041:
Screw SG 10407 (M4x10) needed.




Smart Fix SG 11201 - SG 11205 and clamp SG 3004:
Screw SG 10074 (M4x8) needed.

Smart Fix	X mm (SG 3041)	X mm (SG 3004)
SG 11200 / SG 11210	83	
SG 11201 / SG 11211	103	72
SG 11202 / SG 11212	123	92
SG 11203 / SG 11213	143	112
SG 11204 / SG 11214	173	142
SG 11205 / SG 11215	223	192
SG 11154	128-156	102-130
SG 11155	158-186	132-160
SG 11156	208-236	182-210



**Square Smart Fix SG 11211 - SG 11215 and clamp
SG 3004:**

Screw SG 10074 (M4x8) needed.

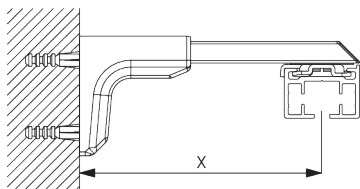


**Universal Smart Fix SG 11154 - SG 11156 and clamp
SG 3004:**

Screw SG 11158 (M4x12) needed.



SG 3004

Clamp



SG 3041

Bracket



SG 10074

Countersunk head screw
M4x8



SG 10407

Pan head screw M4x10




SG 10492

Pan head screw M4x8




SG 11158

Countersunk head screw
M4x12




SG 11200

Smart Fix 60 mm




SG 11201

Smart Fix 80 mm




SG 11202

Smart Fix 100 mm




SG 11203

Smart Fix 120 mm




SG 11204

Smart Fix 150 mm




SG 11205

Smart Fix 200 mm




SG 11210

Square Smart Fix 60 mm




SG 11211

Square Smart Fix 80 mm




SG 11212

Square Smart Fix 100 mm




SG 11213

Square Smart Fix 120 mm




SG 11214

Square Smart Fix 150 mm




SG 11215

Square Smart Fix 200 mm




SG 11154

Universal Smart Fix 120 mm



SG 11155

Universal Smart Fix 150 mm




SG 11156


Universal Smart Fix 200 mm

D. RECESS FITTING

Recess profile SG 10862

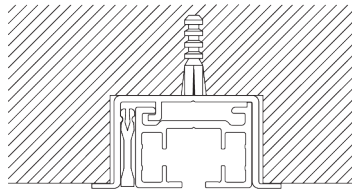


One wedge SG 5118 per fixing point.
For detailed recess fitting, visit the Silent Gliss website.




SG 10862

Recess profile



SG 10864

Recess mask





SG 5118

Wedge

E. SUSPENDED FITTING

Hanger SG 6105







SG 6105

Hanger with plate

V-hanger SG 6107

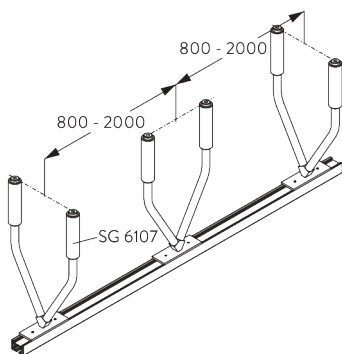


SG 6107


V-Hanger with plate

SYSTEM OPTIONS

A. WAVE




SG 11295



SG 10852


Standard components:

- SG 11295 End stop
- SG 10852 Wave 2C roller cord 80 mm



Optional components:


- SG 10869 Wave 2C roller cord 60 mm

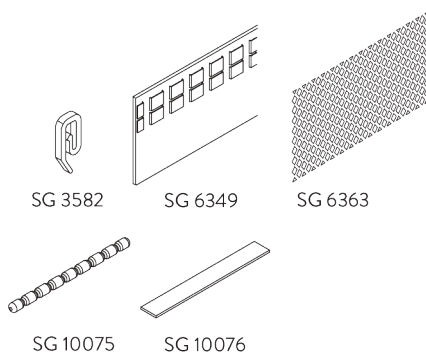

Curtain components:

- SG 3582 Hook
- SG 6349 Wave curtain tape
- SG 6363 Wave top hemming tape
- SG 10075 Lead weight 50 gr/m
- SG 10076 Fabric weight

Wave stack depth - 2C roller cord (standard components)



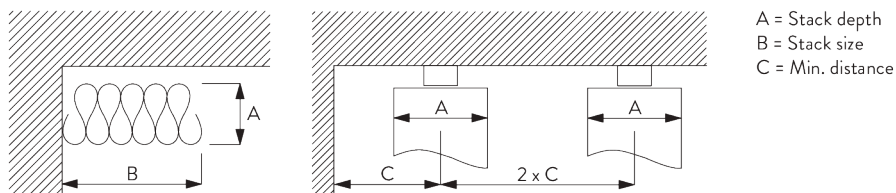


2C Roller cord SG 10852	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B	Min distance C
80	6	~2.1	140	210 per metre of track	90
80	7	~2.3	160	210 per metre of track	100









2C Roller cord SG 10869	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B	Min distance C
60	4	~2.1	100	260 per metre of track	70
60	5	~2.3	120	260 per metre of track	80













PARTS


A. STANDARD PARTS

	SG 3004 Clamp
	SG 3581 Hook
	SG 10840 2C roller
	SG 10850 Profile
	SG 11235 End cover
	SG 11465 Spring stop

B. OPTIONAL PARTS

	SG 3012 Hook
	SG 3041 Bracket
	SG 3582 Hook
	SG 5118 Wedge
	SG 6105 Hanger with plate
	SG 6107 V-Hanger with plate
	SG 6349 Wave curtain tape
	SG 6363 Wave top hemming tape
	SG 7002 Profile protector
	SG 10074 Countersunk head screw M4x8
	SG 10075 Lead weight 50 g/m
	SG 10076 Fabric weight
	SG 10407 Pan head screw M4x10
	SG 10492 Pan head screw M4x8

	SG 10831 Connection bridge
	SG 10852 Wave 2C roller cord 80 mm
	SG 10862 Recess profile
	SG 10864 Recess mask
	SG 10865 Support plate
	SG 10869 Wave 2C roller cord 60 mm
	SG 11154 Universal Smart Fix 120 mm
	SG 11155 Universal Smart Fix 150 mm
	SG 11156 Universal Smart Fix 200 mm
	SG 11158 Countersunk head screw M4x12
	SG 11200 Smart Fix 60 mm
	SG 11201 Smart Fix 80 mm
	SG 11202 Smart Fix 100 mm
	SG 11203 Smart Fix 120 mm




SG 11204

Smart Fix 150 mm




SG 11205

Smart Fix 200 mm




SG 11210

Square Smart Fix 60 mm




SG 11211

Square Smart Fix 80 mm




SG 11212

Square Smart Fix 100 mm




SG 11213

Square Smart Fix 120 mm




SG 11214

Square Smart Fix 150 mm



SG 11215



Square Smart Fix 200 mm



SG 11295

End stop

SG 1032

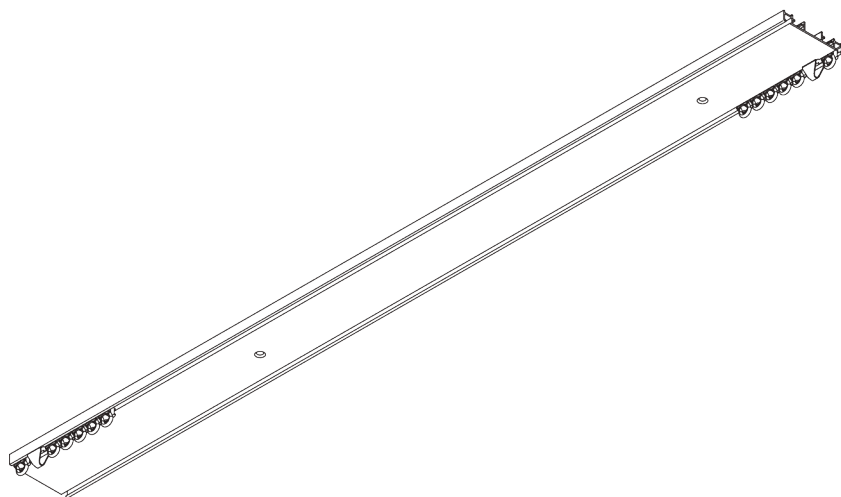

PRODUCT INFORMATION

- **Operation:** hand
- **Range:** S
- **Fitting:** ceiling
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- Pre-drilled two channel profile

SYSTEM SPECIFICATIONS


A. PROFILE

Profile information



SG 1032p
Profile

B. HOW TO MEASURE

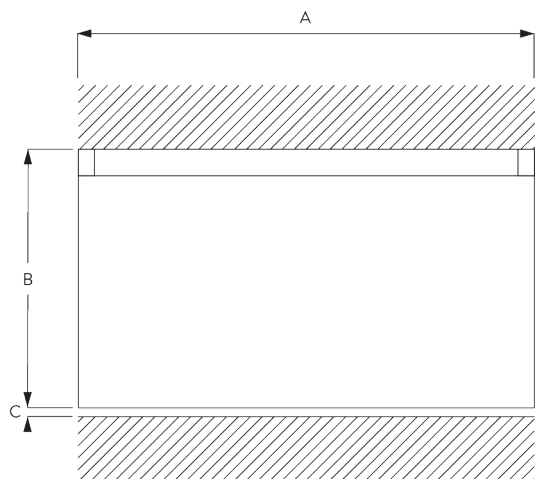


A: System width
B: System height
C: Distance between floor and fabric

FITTING

A. FITTING INFORMATION


Fixing points

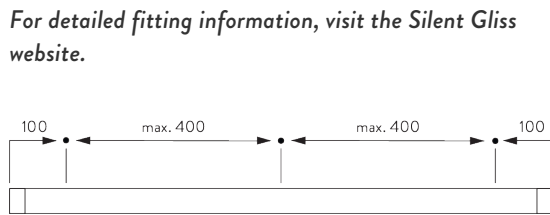

For detailed fitting information, visit the Silent Gliss website.

B. CEILING FITTING

Direct fitting












PARTS

A. STANDARD PARTS

	SG 1032p Profile
	SG 3070 End stop
	SG 3085 Spring stop
	SG 3533 Glider
	SG 3599 Hook

B. OPTIONAL PARTS

	SG 3177 Corner connector
	SG 3511 Glider
	SG 3534 Glider 3533 on strip
	SG 3535 Glider
	SG 3537 Glider
	SG 3548 Glider
	SG 3549 Click glider with hook
	SG 3570 Glider
	SG 3582 Hook
	SG 3598 Eyelet
	SG 6173 Connection bridge
	SG 10430 Draw rod 50 cm
	SG 10431 Draw rod 75 cm
	SG 10432 Draw rod 100 cm

	SG 10433 Draw rod 125 cm
	SG 10434 Draw rod 150 cm
	SG 11335 End stop

The Architects of Silence

Silent Gliss is the leading global supplier of premium interior window treatments. Since 1952 we have been tirelessly committed to the development of the worlds` smoothest, quietest systems using state of the art technology.

Driven by customer needs, Silent Gliss offers functional and durable products. Expert technical advice coupled with installation and support services complete the offer. Silent Gliss stands for innovative, sustainable, tailor made solutions, exceptional design and first-class quality.

Oy Vallila Contract Ab

Nilsjängatu 15

FI-00510 Helsinki

T +358 (0)20 776 7700

F +358 (0)20 776 7701

silentgliss@vallilainterior.fi

silentgliss.fi